



Samsung Epic 4G Touch Front Panel Assembly Replacement

Use this guide to replace your front panel...

Written By: Sam Goldheart



INTRODUCTION

Use this guide to replace your front panel assembly.

TOOLS:

[iFixit Opening Tool](#) (1)
[Spudger](#) (1)
[Phillips #00 Screwdriver](#) (1)

PARTS:


[Galaxy S II \(Sprint\) Screen](#) (1)

Step 1 — Rear Case



- Insert a plastic opening tool, or your fingernail, into the opening near the left side of the headphone jack.
- Pry the opening tool downward to pop the rear case from its clips securing it to the the midframe.

Step 2

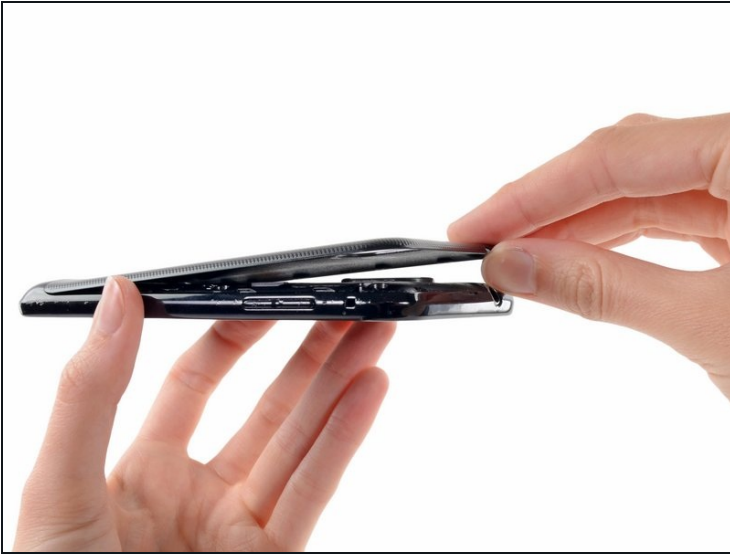

- Lift and remove the rear case.

Step 3 — microSD Card



- Use the flat end of a spudger, or your fingernail, to press the microSD card slightly deeper into its slot until you hear a click.
 - After the click, release the card and it will pop out of its slot.
- ☒ During reassembly, push the microSD card into the slot until it clicks in place.

Step 4



- Pull the microSD card away from its slot.

Step 5 — Battery



- Wedge a plastic opening tool into the crevice between the battery and midframe located near the bottom left corner.
- Push the plastic opening tool downward to pry the battery up from its housing.

Step 6




- Lift and remove the battery from the midframe.

Step 7 — Plastic Midframe




- Remove the six 4.0 mm Phillips #00 screws securing the midframe to the front panel assembly.

Step 8

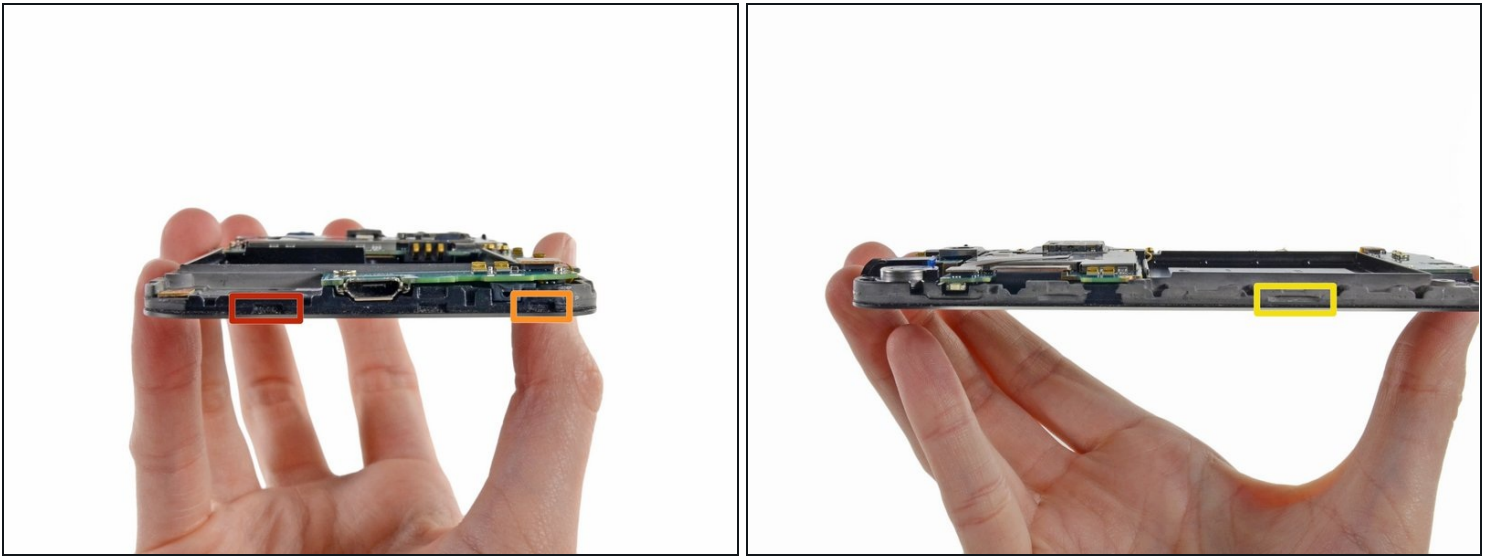

- ⓘ Unless you pry at the right insertion points, you might have a difficult time removing the midframe. This shot of the display assembly, with display glass facing down, is meant to help you locate them.
- The first insertion point is a divot to the left of the micro-USB port.
 - The second insertion point is a divot to the right of the micro-USB port near the corner of the phone.
 - The final insertion point is located about two inches to the right of the volume control toggle, toward the corner of the phone. An additional insertion point is located slightly to the right of the volume button if you need it.

Step 9

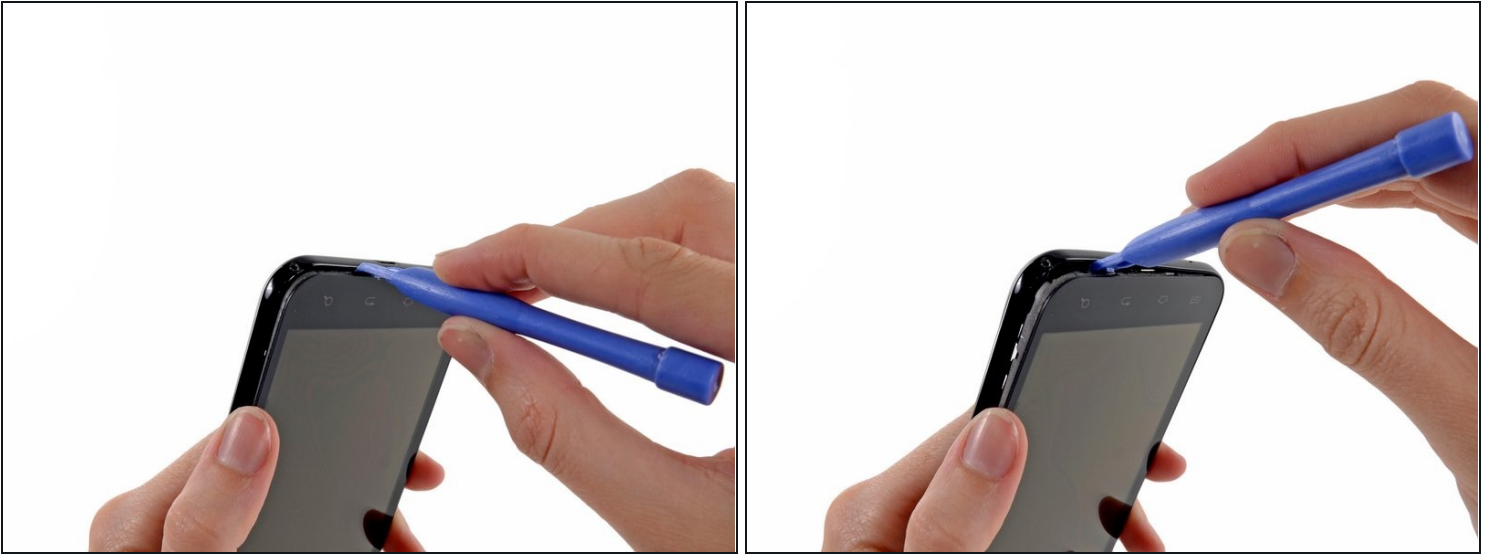

- Insert a plastic opening tool slightly to the left of the micro-USB port, and pry between the midframe and the display to open a gap.

Step 10



- Wedge a plastic opening tool slightly to the right of the micro-USB port, and pry between the midframe and the display to widen the gap.

Step 11



- Pry again about two inches to the right of the volume control toggles between the midframe and the front panel assembly.

Step 12




- Pull the micro-USB end of the front panel assembly out and away from the midframe and lift up to free it entirely.

Step 13 — Motherboard Connectors




- Headphone jack/vibrator assembly cable connector
- Front-facing camera cable connector
- Digitizer cable connector
- Display cable connector

Step 14 — Headphone Jack/Vibrator Connector

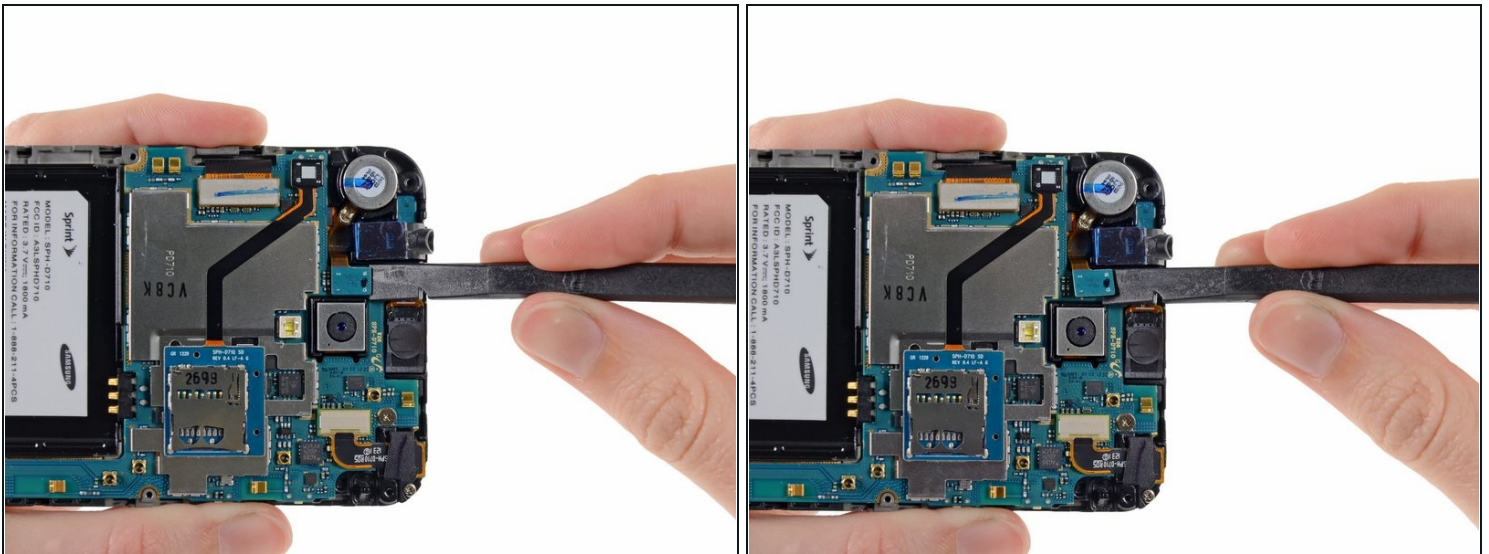

- Use the flat end of a spudger to disconnect the headphone jack/vibrator assembly cable.

Step 15 — Motherboard Assembly

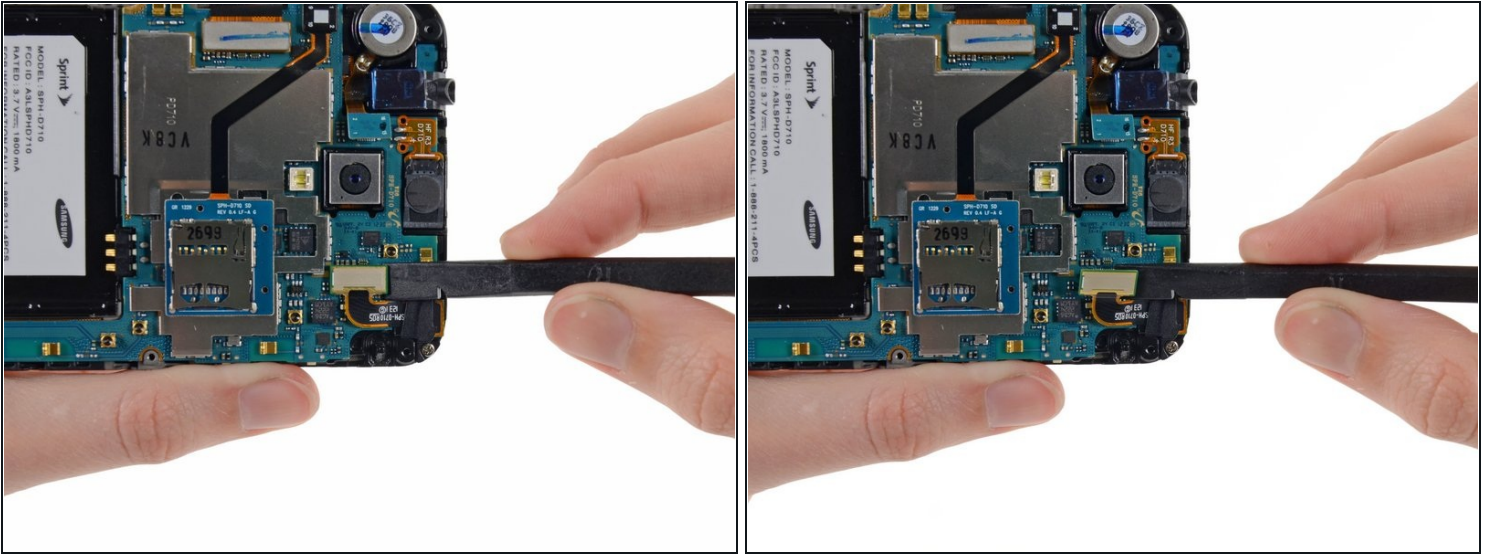


- Use the flat end of a spudger to disconnect the front-facing camera cable connector.

Step 16



- Carefully disconnect the digitizer display cable.

Step 17

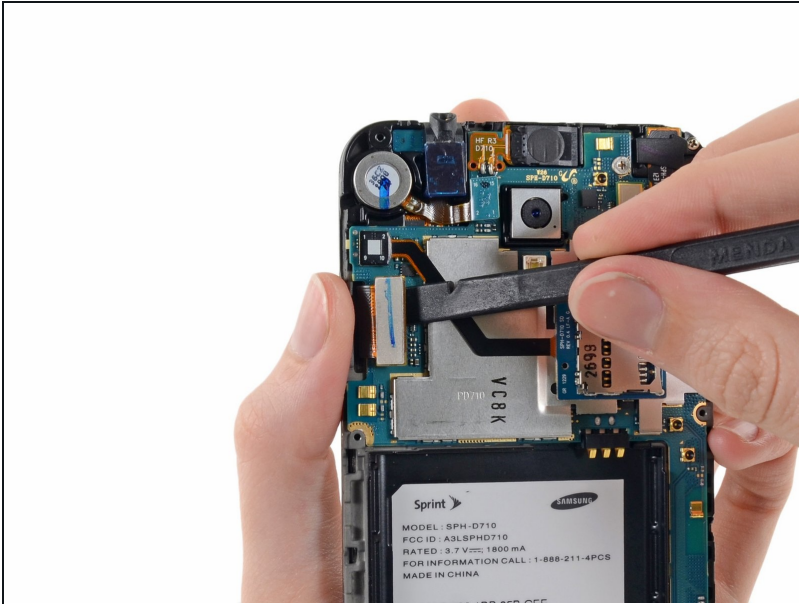

- Use a spudger to disconnect the display cable connector.

Step 18



- Remove the two 3 mm Phillips #00 screws.


Step 19



- Lift the micro-USB end of the motherboard away from the display assembly and pull it down.


⚠ Be mindful that you don't snag the motherboard on any cables as you remove it.

Step 20 — Microphone Cover

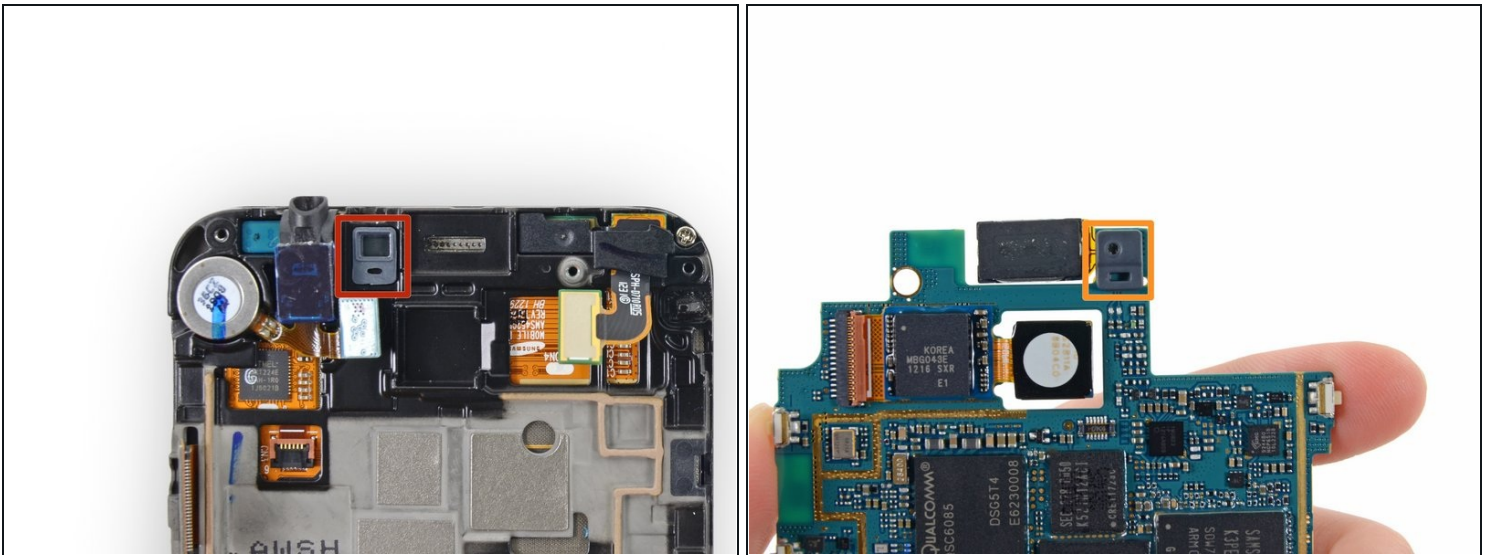


- ☑ The microphone cover fits in a notch and over a small peg in the display assembly, ensure it is well seated before sealing your device.
- Make sure the microphone cover stays in its slot on the display assembly.
- When you removed the motherboard, the microphone cover may have remained stuck on the microphone. Put it back in its notch in the display assembly to avoid losing it.

Step 21 — Front Facing Camera/Earpiece Speaker Assembly

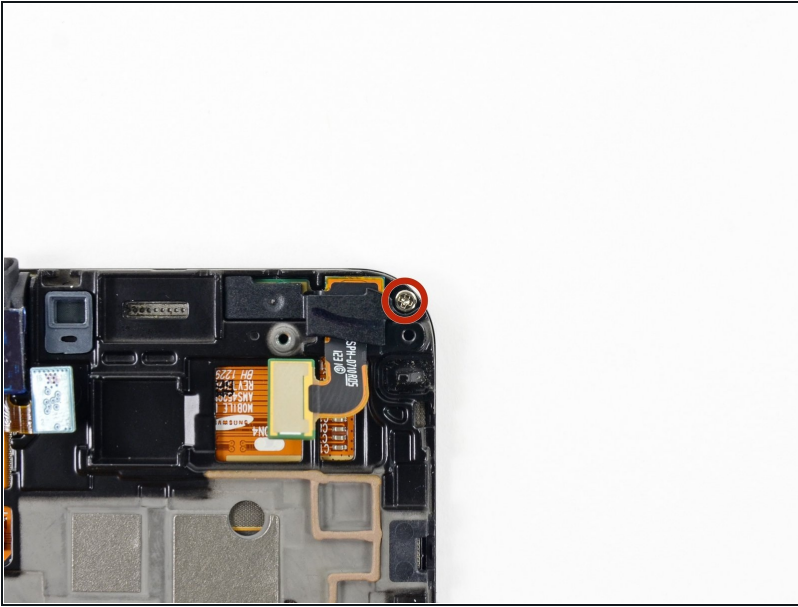


- Remove the 2.3 mm Phillips #00 screw securing the front-facing camera bracket to the display assembly.

Step 22

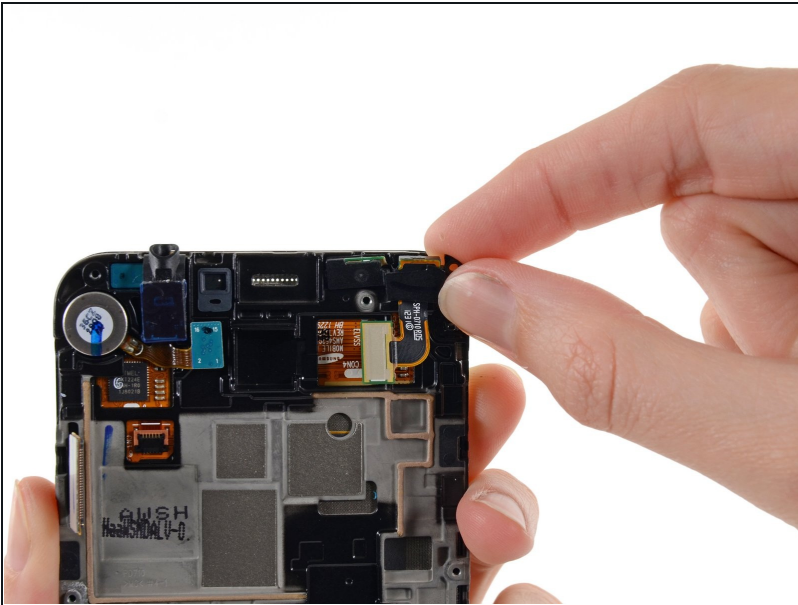


- Remove the front-facing camera bracket from the display assembly.

Step 23

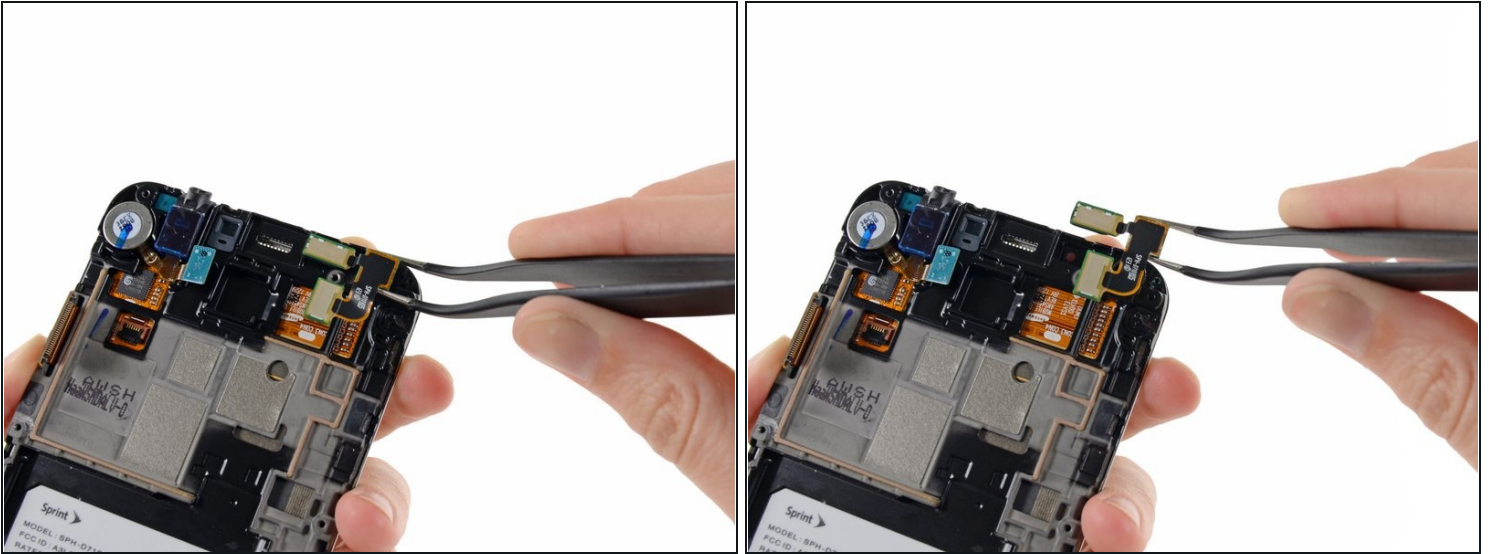

- Using a pair of [tweezers](#), or your fingers, remove the front-facing camera/earpiece speaker assembly.


Step 24 — Headphone Jack/Vibrator

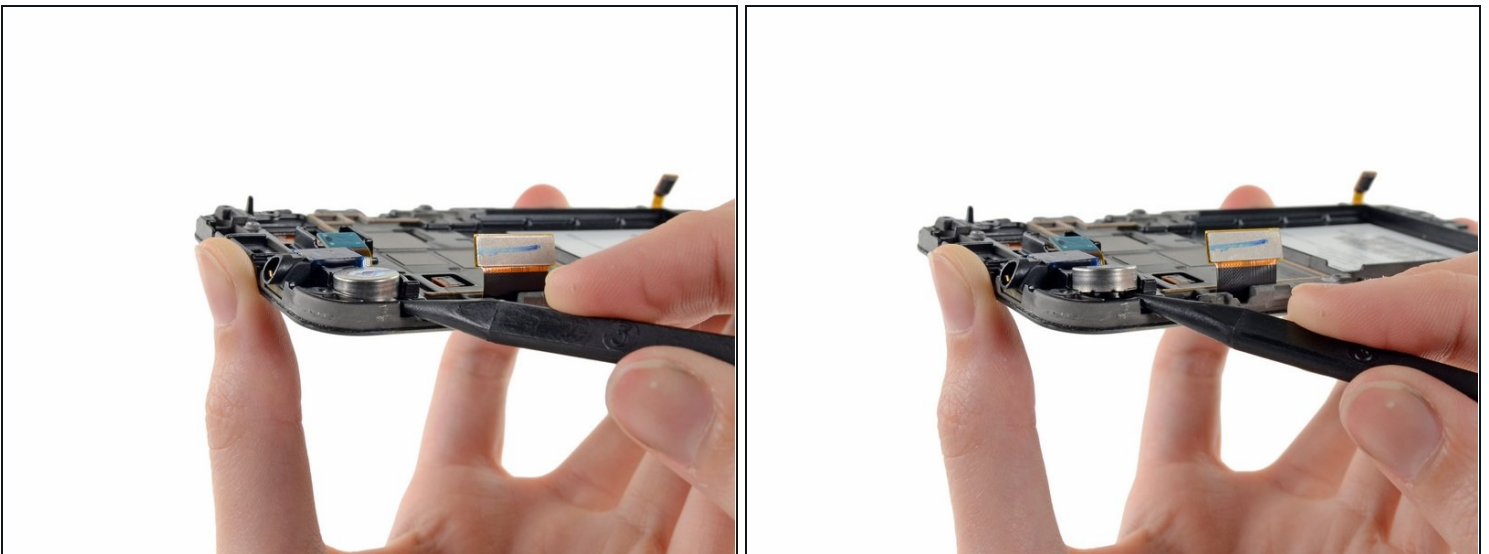

- Insert the pointed end of a spudger into the gap in the corner of the midframe to free the vibrator from the adhesive.


⚠ Do not completely remove the vibrator, it is still attached to the headphone jack/vibrator assembly and can only come out with the rest of the unit.

Step 25

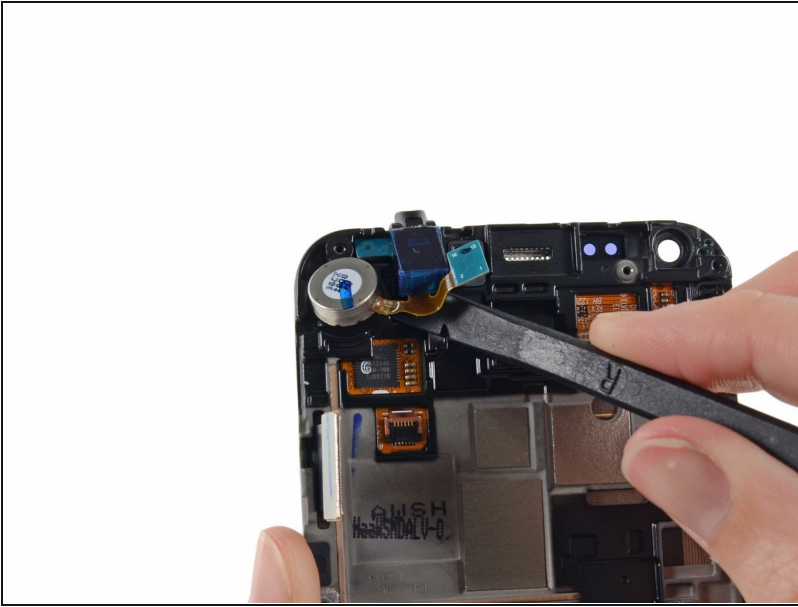

- Use the flat end of a spudger to release the headphone jack from the adhesive securing it to the midframe.

Step 26

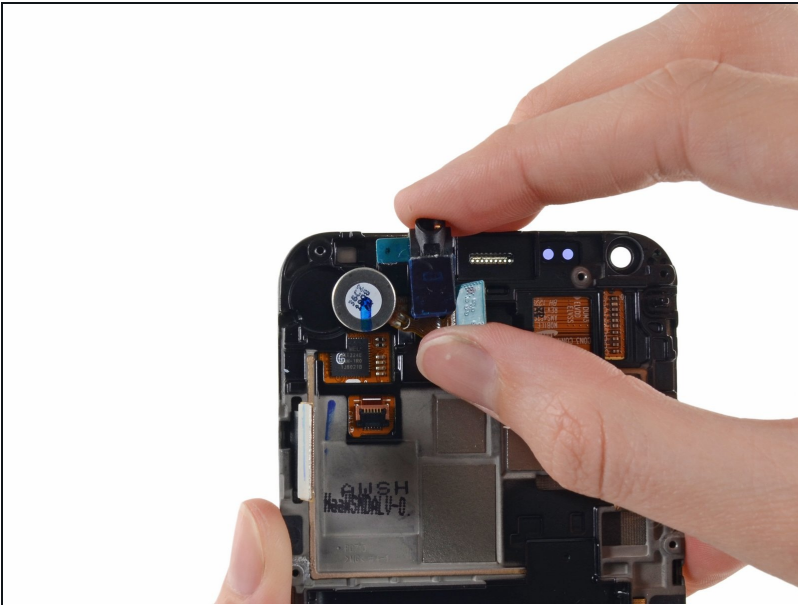

- Remove the headphone jack/vibrator assembly from the display assembly.

Step 27 — Front Panel Assembly



- Front panel assembly remains.

To reassemble your device, follow these instructions in reverse order.