




# Hott T725-8G Motherboard Replacement

Use this guide to replace the motherboard of the Hott T725-8G. You will need this [<https://www.ifixit.com/Guide/Hott+T725-8G+Back+Panel+Replacement/74840>] Prerequisite Guide] before you begin.

Written By: Jason Dorsey

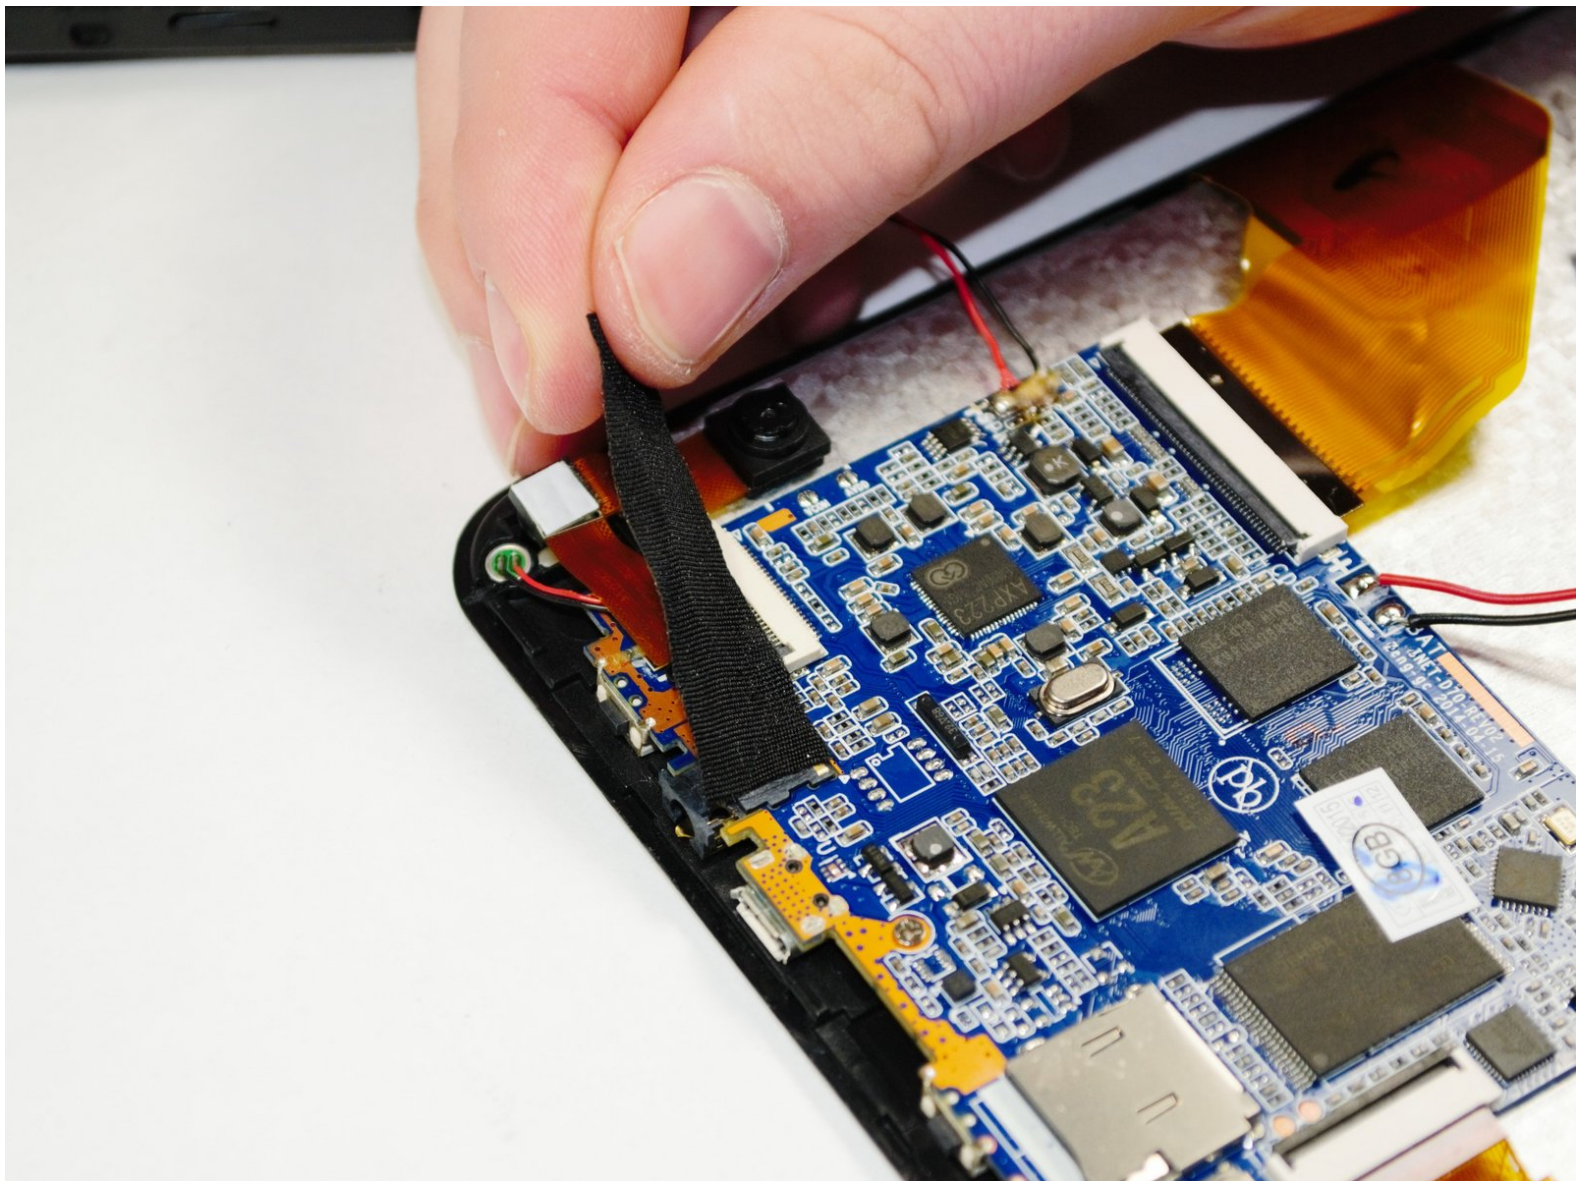

# INTRODUCTION

This guide will walk you through the process of replacing a malfunctioning motherboard in a Hott T725-8G.



## TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)



## PARTS:




- [Replacement Android Motherboard](#) (1)

## Step 1 — Motherboard

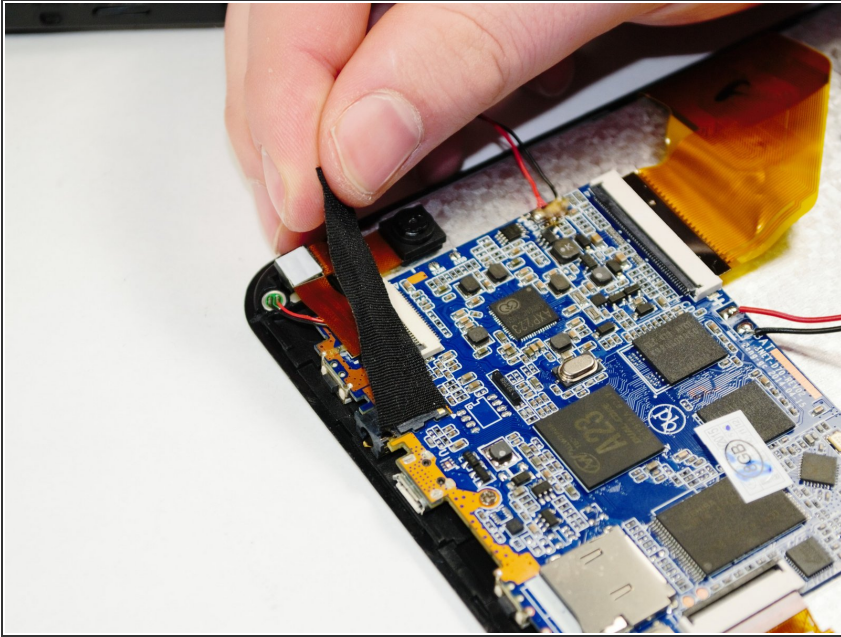

- Carefully remove the black electrical tape connecting the motherboard to the ribbon wire.


## Step 2

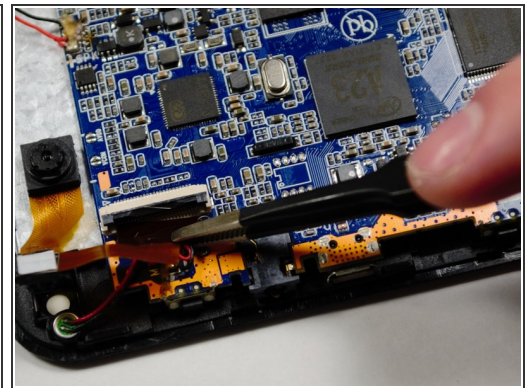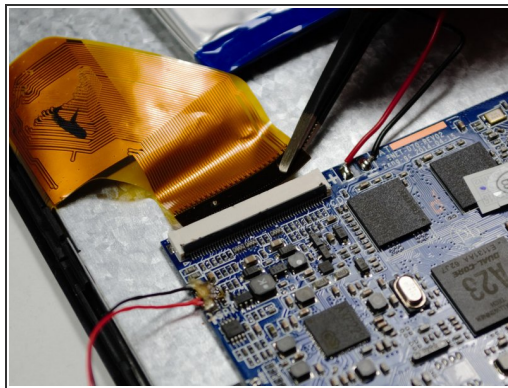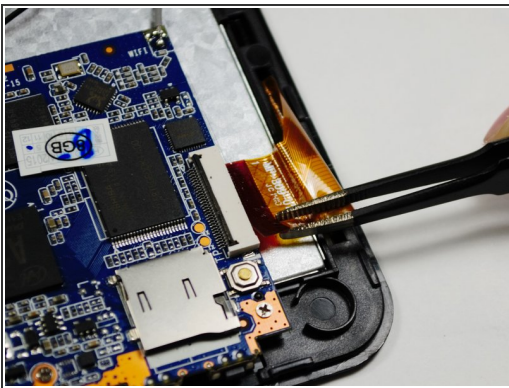

- Squeeze both sides of the protector over the ribbon wire to release it.
- Use the tweezers to gently remove the ribbon wire from the holder.
- Repeat steps for all three ribbon wires shown.



## Step 3

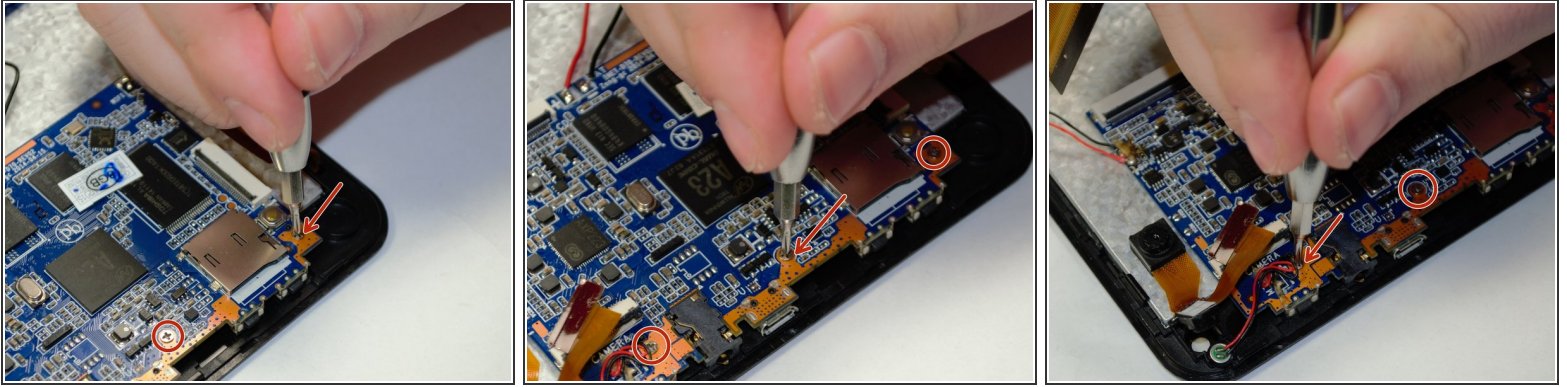

- Use the #000 Phillips screw driver to remove all three 2.2mm screws attached to the mother board.

You are now able to remove the motherboard.

To reassemble your device, follow these instructions in reverse order.