



# Protocol Galileo Stealth Battery Replacement

The replacement of the battery is really simple and no tools will be required to replace the battery.

Written By: stephen R masalewicz



## INTRODUCTION

This guide will walk you through how to safely and effectively remove the battery from your drone. This is a relatively simple process that does not require any tools or prerequisite steps. This guide is not required to charge your drone battery, but may be useful if the battery becomes defective.

## Step 1 — Battery



- Locate the door to the battery compartment on the underside of the drone.

## Step 2



- Open the door to the battery compartment by pressing in the clip on the door and carefully lifting until the door is fully open.


## Step 3



- First pull out the wires located to the side of the battery.
- Carefully remove the battery from the battery compartment
- ⓘ The battery can be a bit difficult to remove, but if the wires are held firmly to the battery, the battery will eventually come out by lightly pulling on the battery and wires simultaneously.
- ⚠ The small black and white wire with the white plug will not be connected to the drone, just be sure the plug does not get stuck in the battery compartment and damaged while removing the battery. This is rarely an issue.



## Step 4

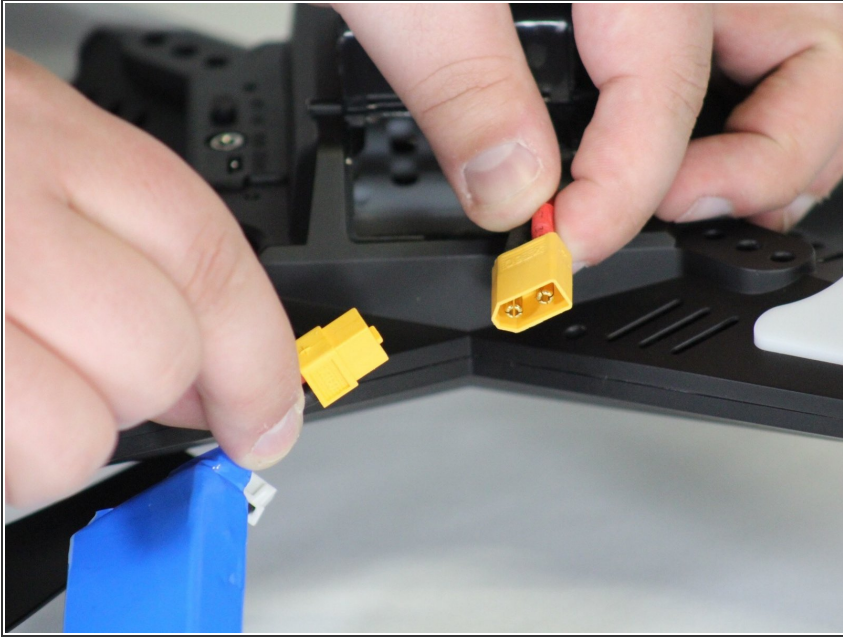

- Disconnect the two ends of the wires by lightly pulling them apart.

To reassemble your device, follow these instructions in reverse order.