



Dell Vostro 5560 Hard Drive Replacement

Written By: Johnathan Hammond




INTRODUCTION

In this guide, we will show you how to remove and replace the Hard Drive.

TOOLS:



- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing The Optical-Disk Drive

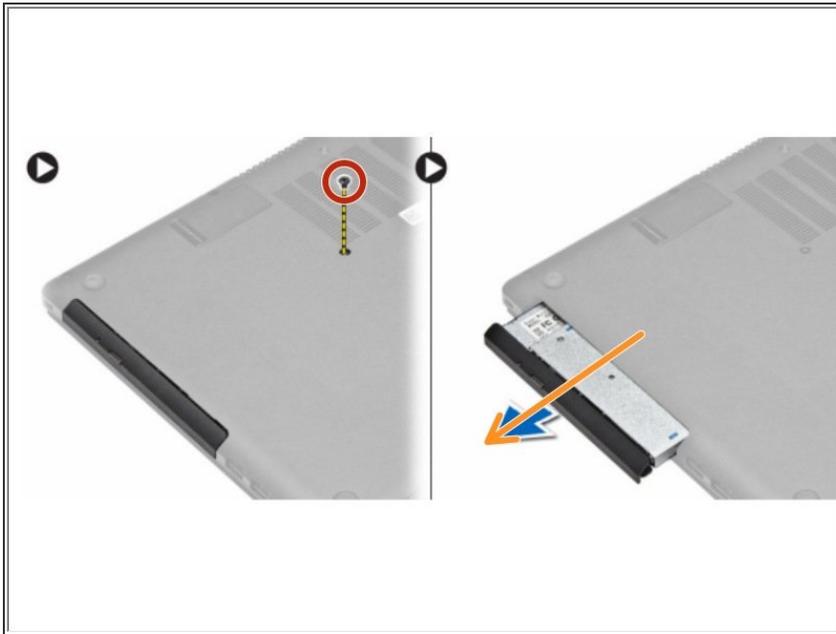

- Remove the screw that secures the base cover to the computer.
 - Pull the optical-drive and remove from the computer.
- ☛ If this is all you are doing Follow Step In Reverse if not Go to Next Step.


Step 2 — Replacing the Base Cover

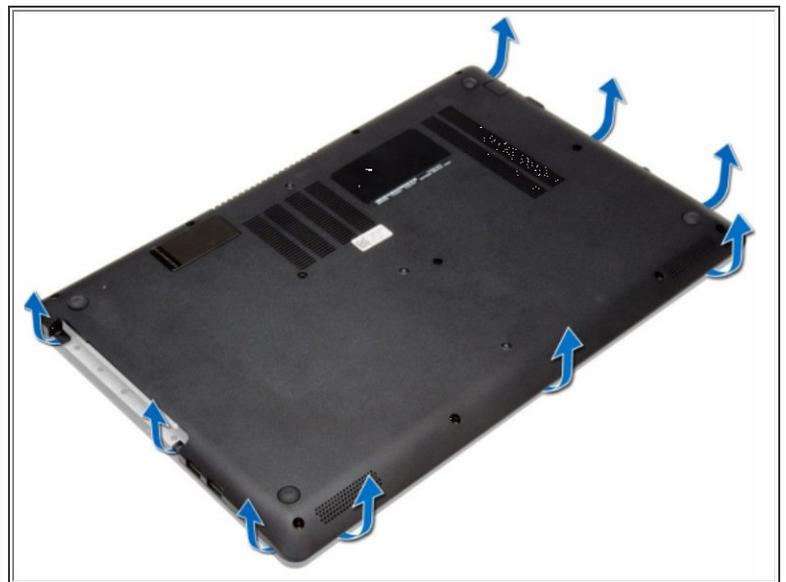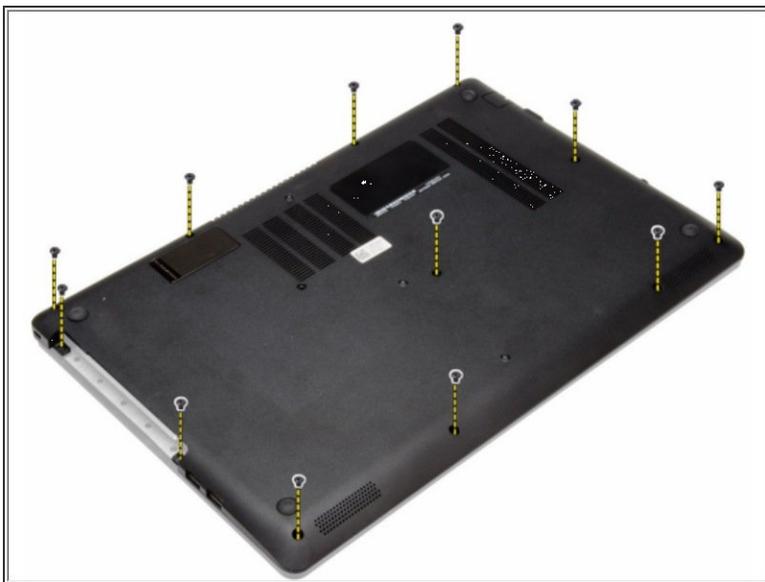

- Remove the screws that secure the base cover to the computer.
- Pry the base cover along the edges to loosen it. Lift and remove the base cover from the computer.


☛ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 3 — Removing the Battery

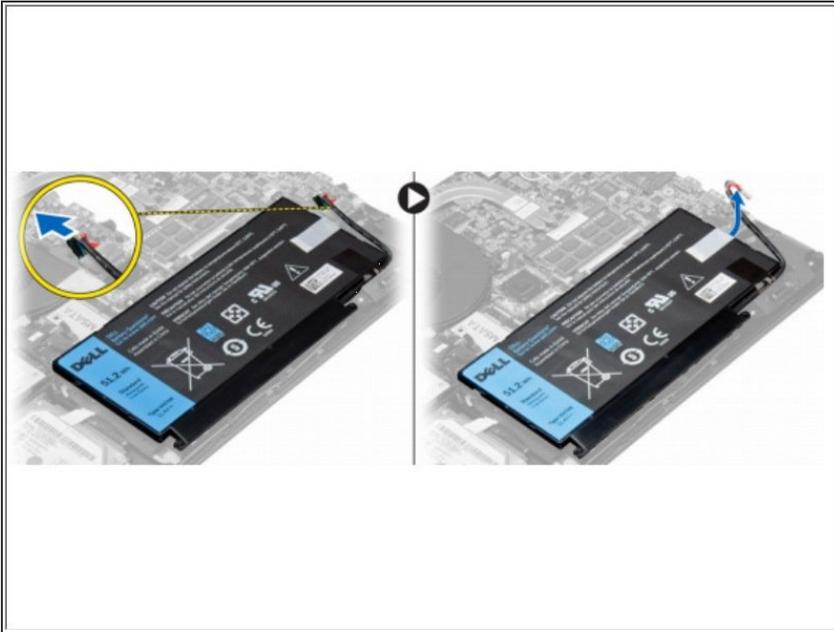

- Disconnect the battery cable from its connector on the system board.
 - Lift and remove the battery from the computer.
- ☛ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 4 — Disconnecting the Hard Drive

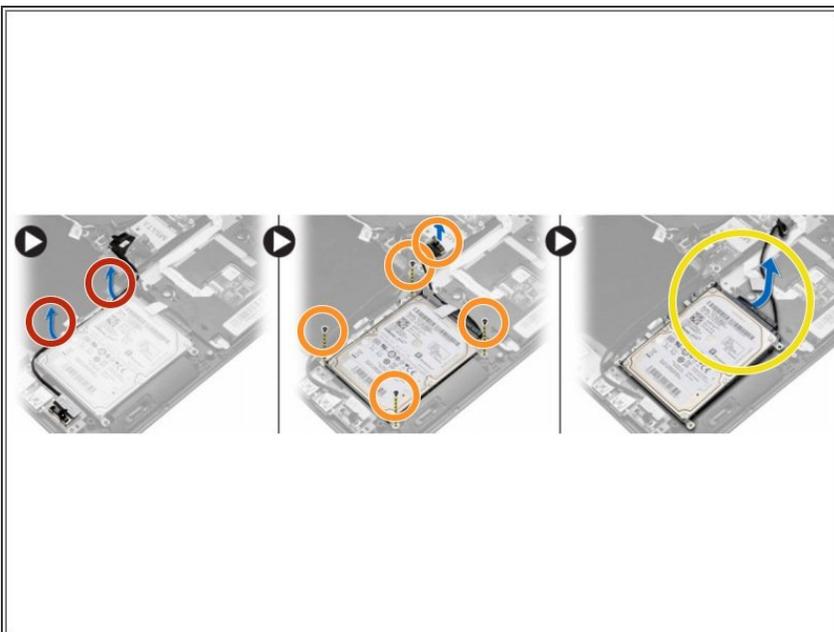

- Ease the I/O cable from the routing tabs.
- Disconnect the hard-drive cable from the system board and remove the screws that secures the hard-drive in place
- Lift and remove the hard-drive from the computer

Step 5 — Disconnecting the Hard Drive Connector



- Disconnect the hard-drive connector from hard drive.

Step 6 — Remove the Screws



- Remove the screws that secure the hard-drive bracket to the hard drive. Separate the hard-drive bracket from the hard drive.
- ★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.