



Timbuk2 - Tuck Pack Tuck Clip Replacement

Here is help to replace your broken tuck clip.

Written By: Timbuk2





TOOLS:


- [Utility Scissors](#) (1)
- [Large Needle Nose Pliers](#) (1)



PARTS:

- [tuck clip](#) (1)

Step 1 — Gearing up

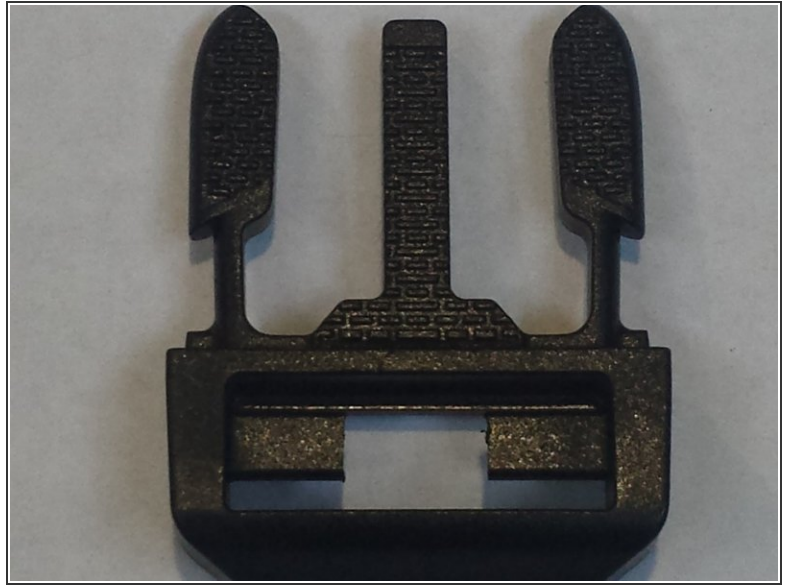

- Before beginning your repair, contact repairs@timbuk2.com to obtain a replacement tuck clip.

Step 2 — Remove old clip




- Using wire cutters or heavy duty scissors, break off old tuck clip and remove from fabric.
- Insert scissors in the space between the strap and the buckle's first loop and cut through.
- Next, insert scissors in second loop between the strap and the buckle's second loop and cut through. (It is easier to cut on the inside edges of the loops than to cut the loops in the center)

Step 3 — Make loop




- Take Strap and fold in half to make a loop shape

Step 4 — Insert loop of strap

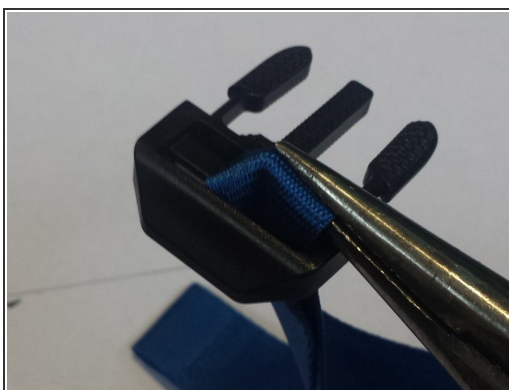

- Insert one side of the loop in the middle section of the clip
- Hook the loop on one of the middle pegs
- Take pliers and pull up the loop that is around the peg

Step 5 — Pull through then done!

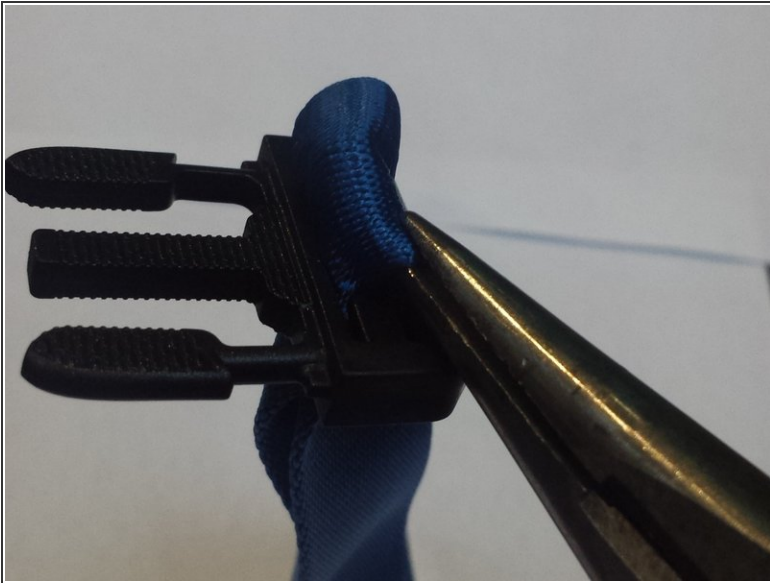

- Using the pliers, grab the other side of loop and pull it over the other middle peg
- Pull strap down and DONE!

Pull strap through clip, tdown and DONE!