



iRulu AX760 Battery Replacement

This specific guide will help guide the reader through a step-by-step procedure to replace the battery of an iRulu AX760 tablet.

Written By: Perri



INTRODUCTION

This guide will show you how to specifically open the case of your iRulu AX760 to gain access to the battery. Then, this guide will show you how to remove the battery from the device.

TOOLS:

- [Soldering Iron](#) (1)
 - [Metal Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery




- Use a plastic opening tool or metal spudger to free the rear cover.
- Insert your spudger into the side of your tablet.
- Crack open each edge and remove the cover.

Step 2




- Open your tablet.

Step 3

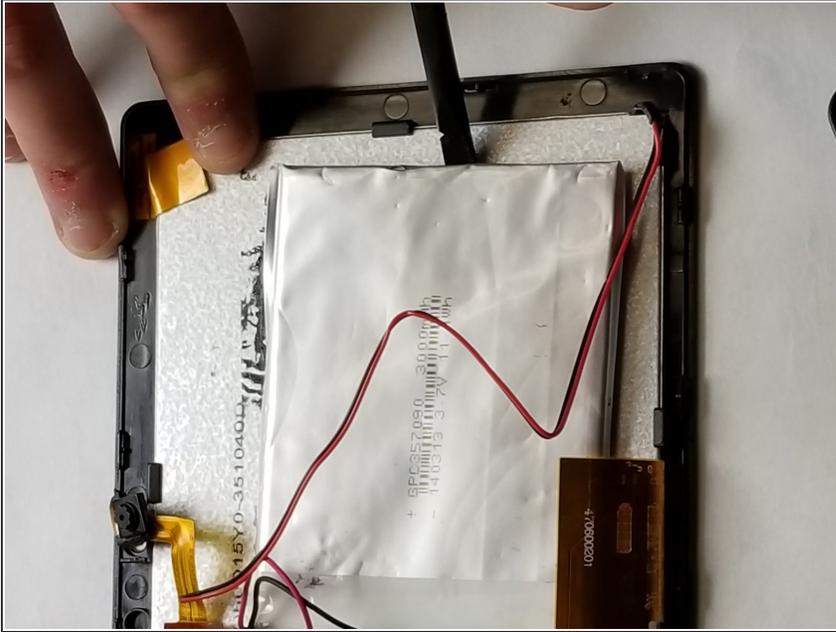


- Take your plastic flat head tool and insert it under the battery.
- Lift the battery up.
- Make sure to remove any tape from the battery.

Step 4

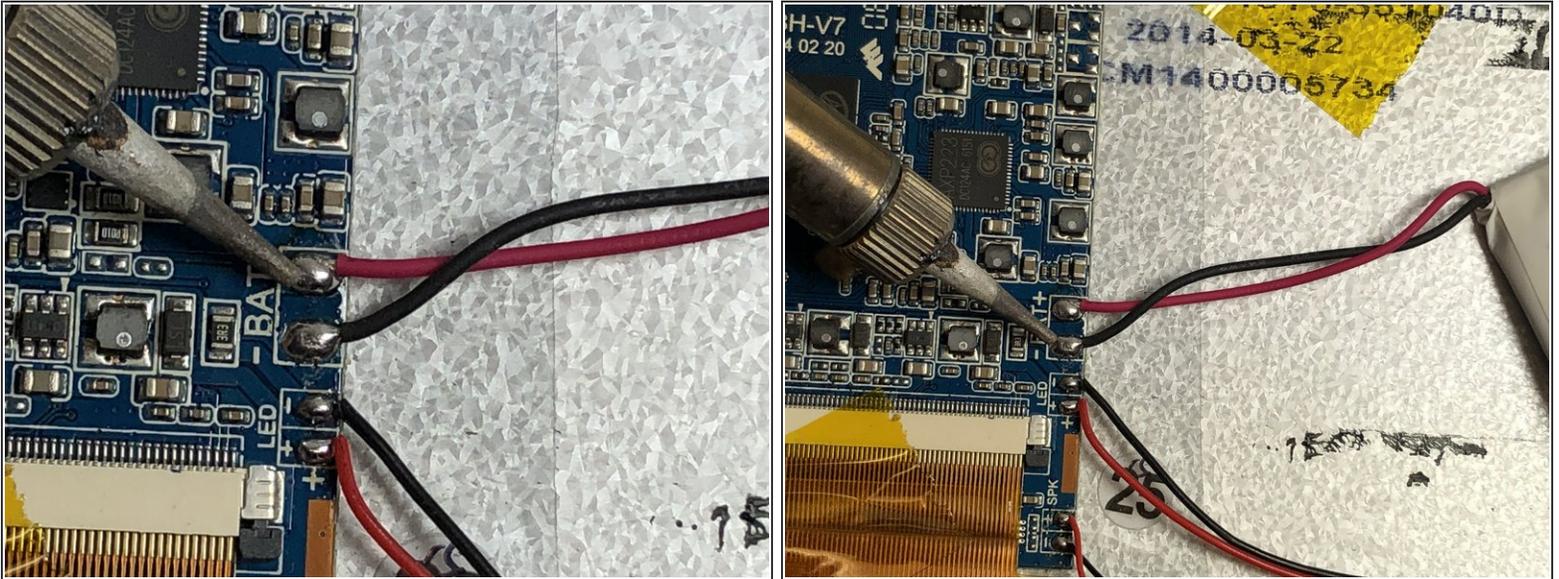

- Use a soldering iron to remove the solder that connects the black and red wires of the battery to the motherboard.
 - Keep the wires of the battery taut.
 - The iron should only be pressed to the solder for 2-3 seconds max.
- ⚠ Be very careful, the soldering iron will be very hot!
- Visit this link for information about soldering. [How To Solder and Desolder Connections](#)

Step 5

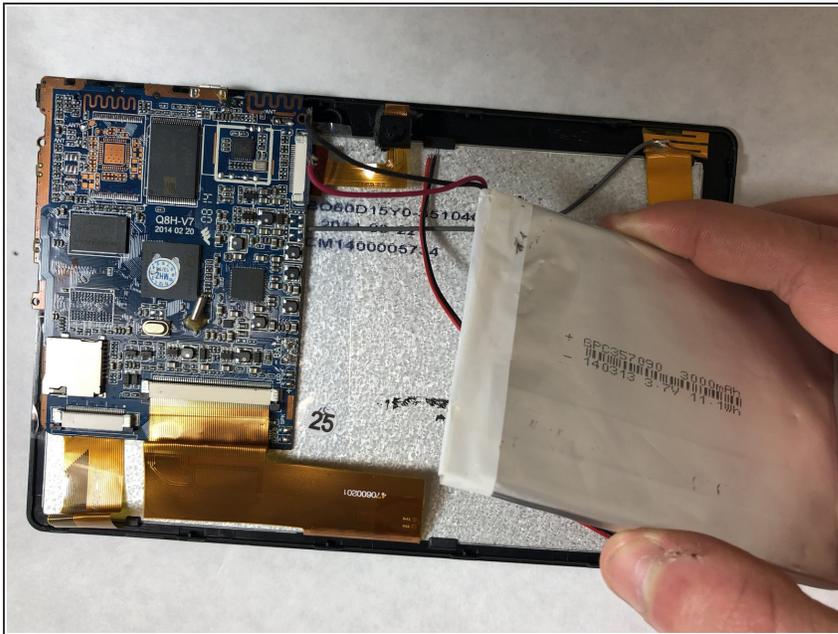

- Remove your old battery and replace it with the new battery.

To reassemble your device, follow these instructions in reverse order.