


Dell Vostro 1510 Hard Drive Replacement


Written By: Johnathan Hammond



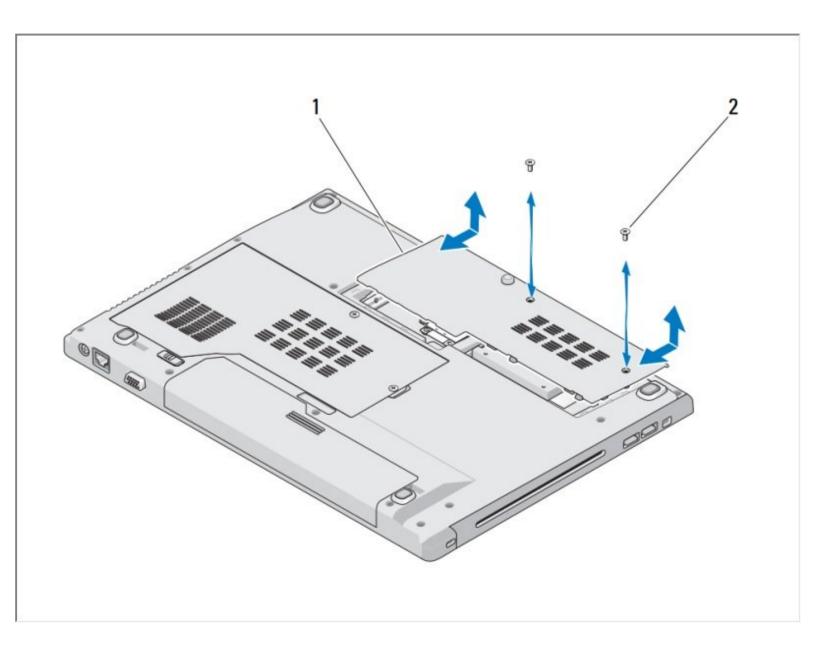


Phillips #0 Screwdriver (1)

Step 1 — Battery

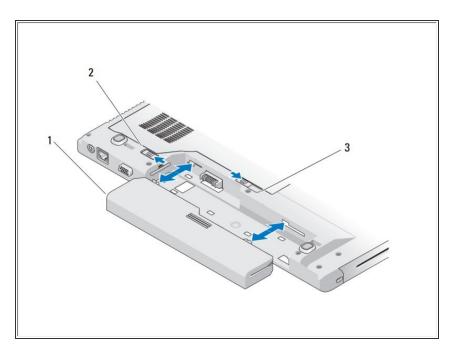


- Slide the battery lock to the open position.{2}
 - Slide the battery release latch to the open position. (You may need to hold the battery release latch in the open position while removing the battery.) {3}
 - Slide the battery out of the battery bay.{1}

Step 2 — Hard Drive

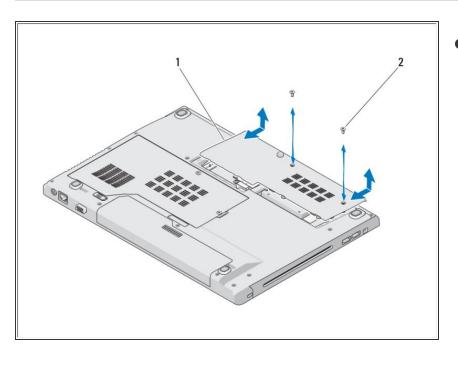

- Remove the two M2.5 x 8-mm screws that secure the hard-drive compartment cover. {2}
 - Remove the cover and set it aside. {1}

Step 3

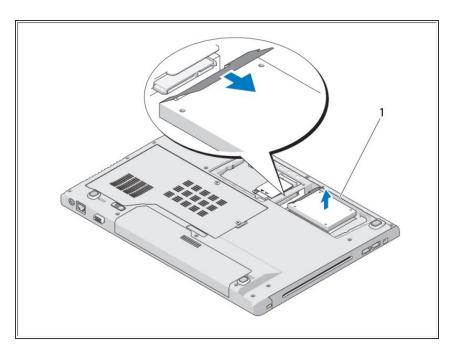

- Remove the three screws securing the hard drive.
 - Pull the plastic tab to release the hard drive.
 - Lift the hard drive out of the computer.
 - Remove the two screws securing the hard drive to the hard drive bracket.
 - Slide the hard drive out of the bracket.

To reassemble your device, follow these instructions in reverse order.