




Dell Vostro 15 7570 Hard Drive Replacement


Written By: Johnathan Hammond

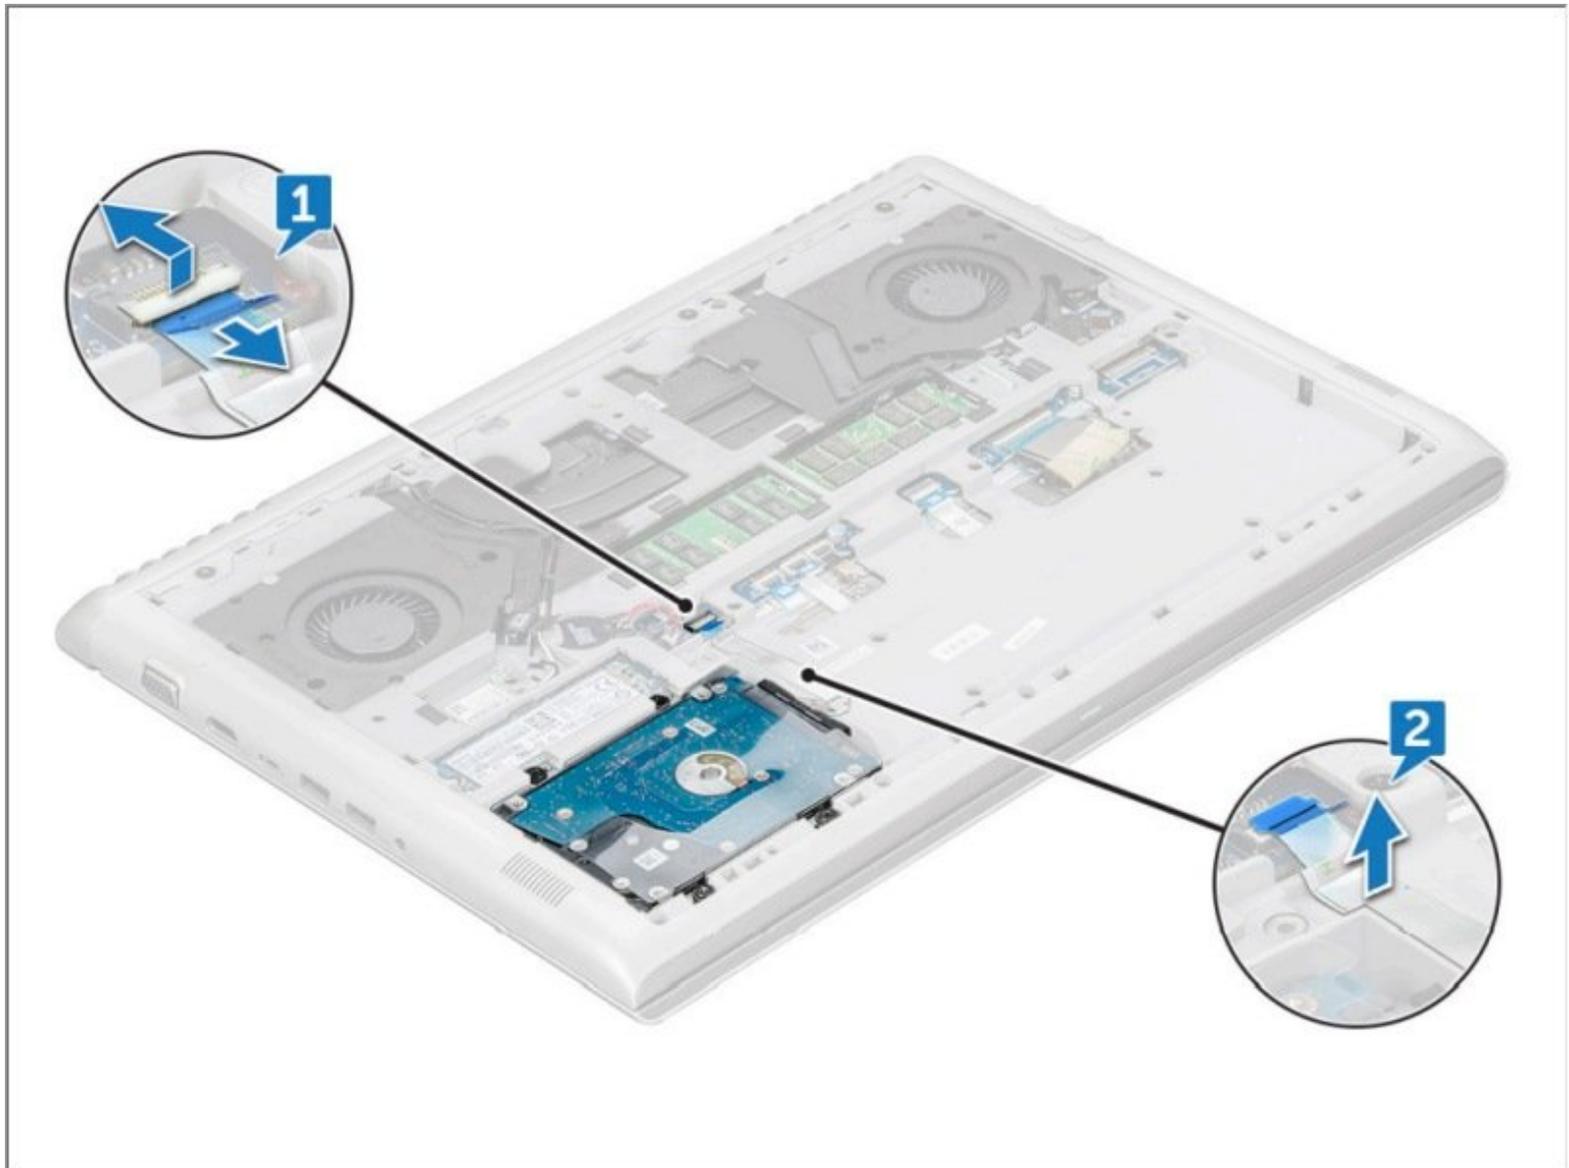

 **TOOLS:**

- Phillips #0 Screwdriver (1)
 - Phillips #1 Screwdriver (1)
 - Spudger (1)
-

Step 1 — Base Cover

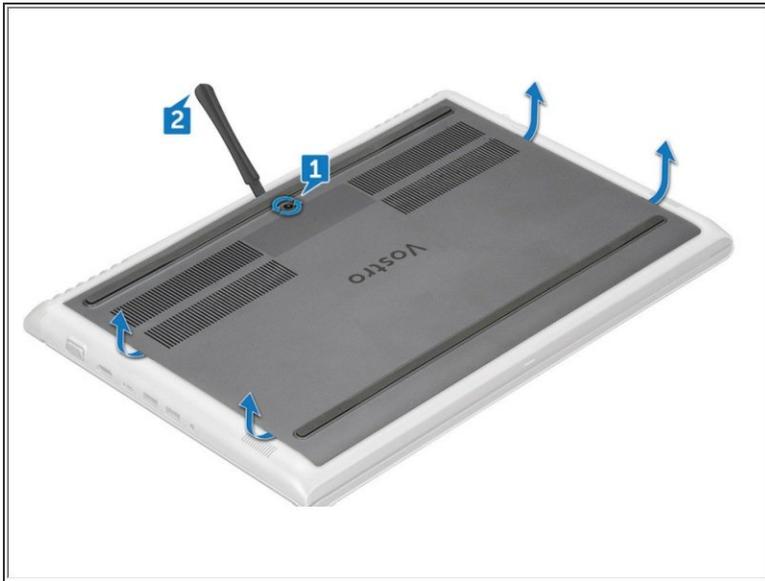


- Loosen the M2.5x2+3.5 captive screws that secure the base cover to the computer [1].
 - Pry the base cover from the edge [2].
 - Lift the base cover away from the computer

Step 2 — Battery (model 99NF2)




- Disconnect the battery cable from the connector on the system board [1].
 - Remove the M2x3L screws that secure the battery to the computer [2].

Step 3 — Hard Drive

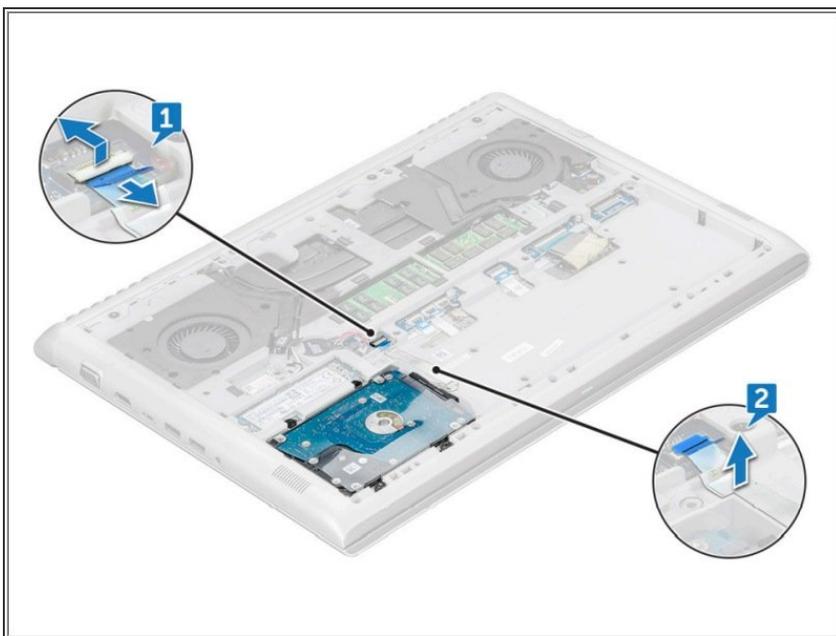

- Lift the latch and disconnect the hard drive cable from the computer [1].
- Pry the hard drive cable to release from the adhesive [2].

Step 4

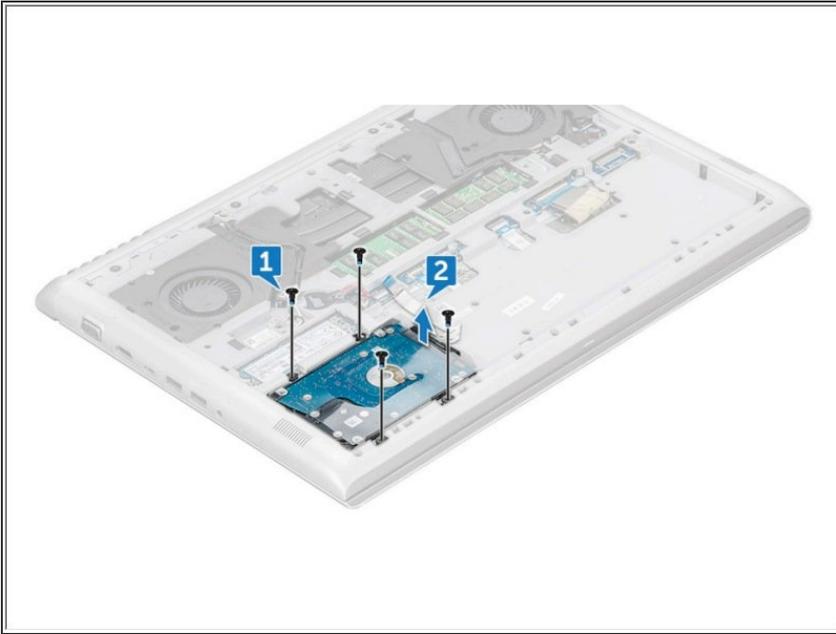

- Remove the M2.5x5L screws that secure the hard drive to the computer [1].
- Lift the hard drive away from the computer [2].

To reassemble your device, follow these instructions in reverse order.