


## **Dell Vostro 1000 Memory Module Replacement**


Written By: Johnathan Hammond



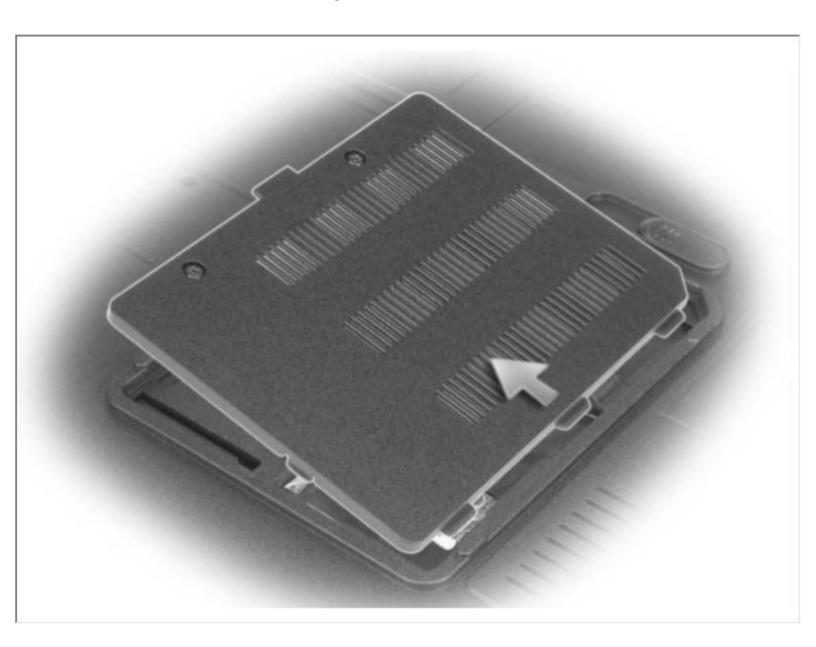


Phillips #0 Screwdriver (1)

## Step 1 — Battery

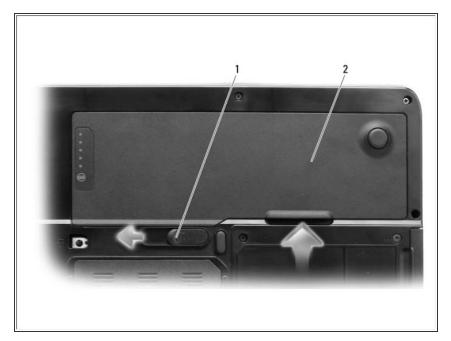


 Slide and hold the battery-bay latch release on the bottom of the computer, and then lift the battery from the bay.

## Step 2 — Memory Module

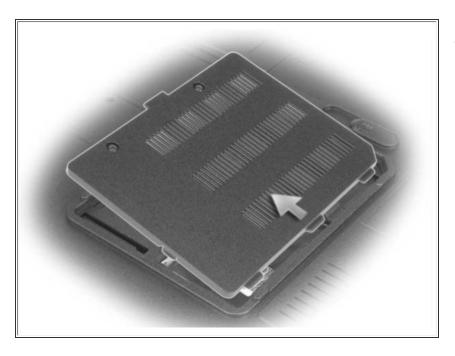

 loosen the captive screws on the memory module cover, and then remove the memory module cover.

## Step 3

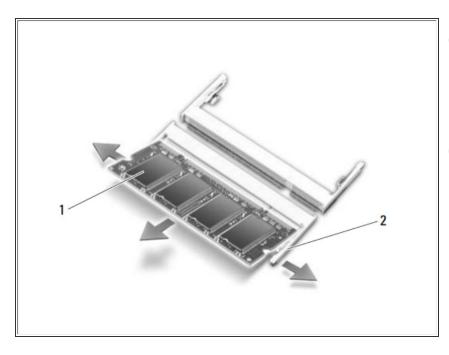

- NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memorymodule securing clips.
- i NOTICE: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on the back of the computer).
  - Use your fingertips to carefully spread apart the memory-module securing clips on each end of the memory module connector until the module pops up.
    - Remove the module from the connector.

To reassemble your device, follow these instructions in reverse order.