




# HP Mobile Thin Client mt41 Back Cover Removal

Written By: Raul Rodriguez

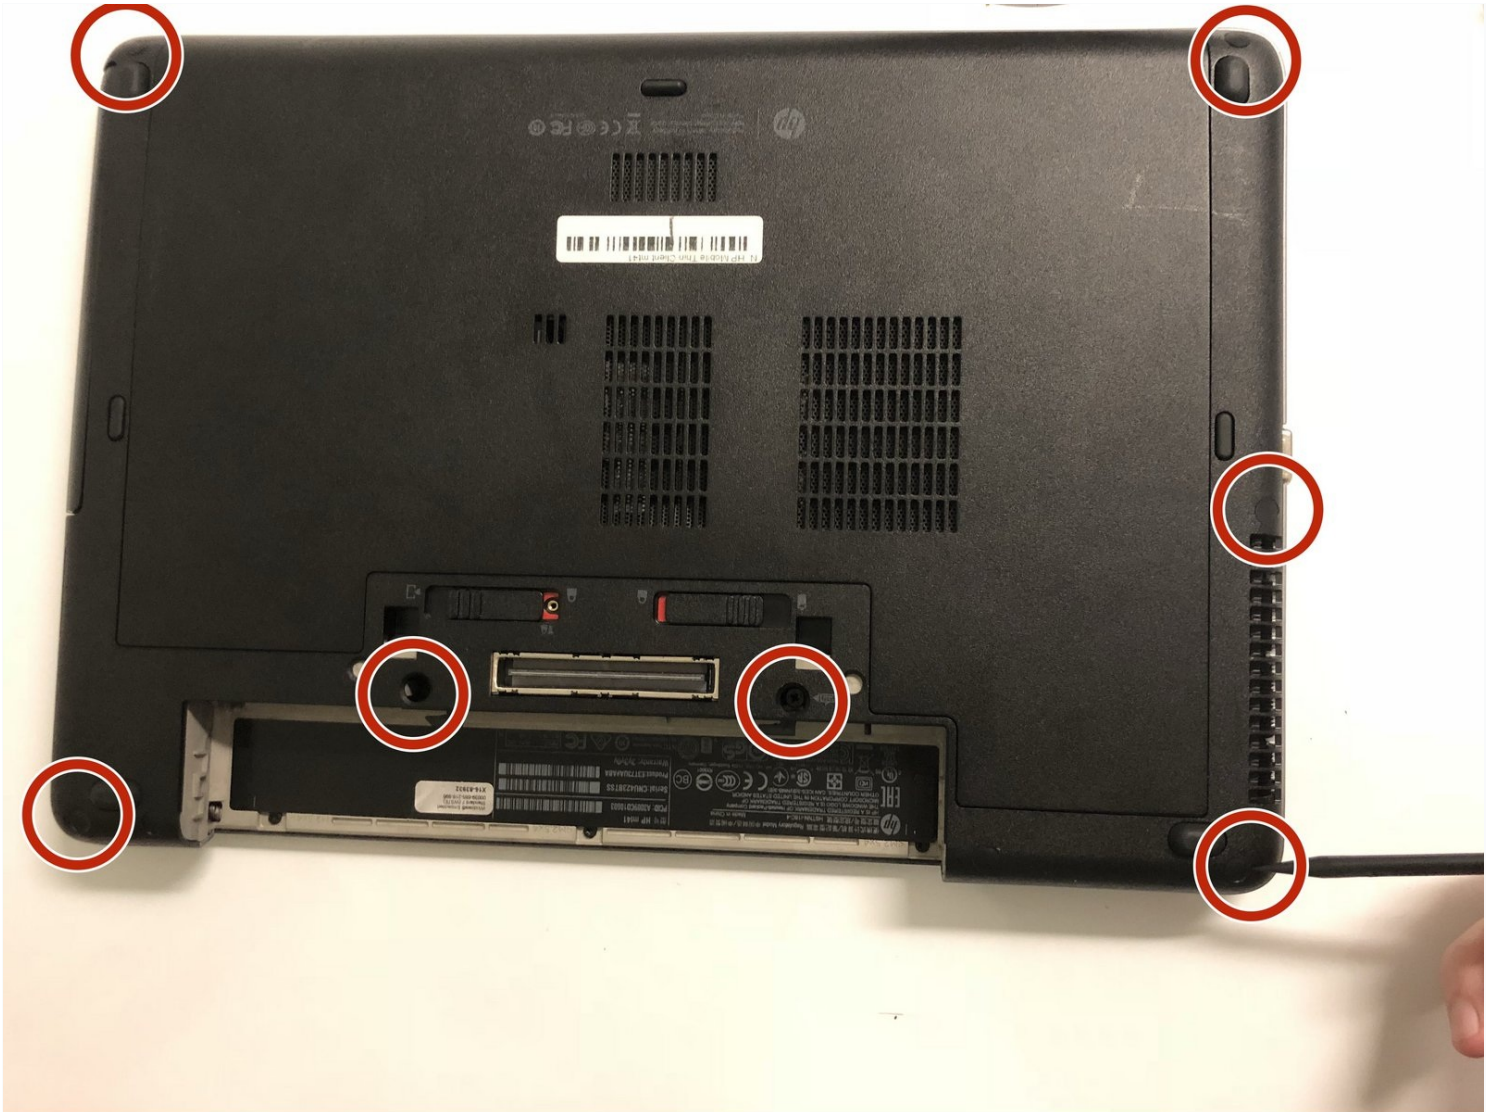

## TOOLS:

iFixit Opening Tool (1)

T5 Torx Screwdriver (1)


Spudger (1)

### Step 1 — Back Cover



- Remove the nine screws that keep the back cover secured using the T5 Torx screwdriver.
- ⓘ We recommend removing the battery first. Refer to the "Battery Replacement" guide to learn how to remove the battery.

### Step 2

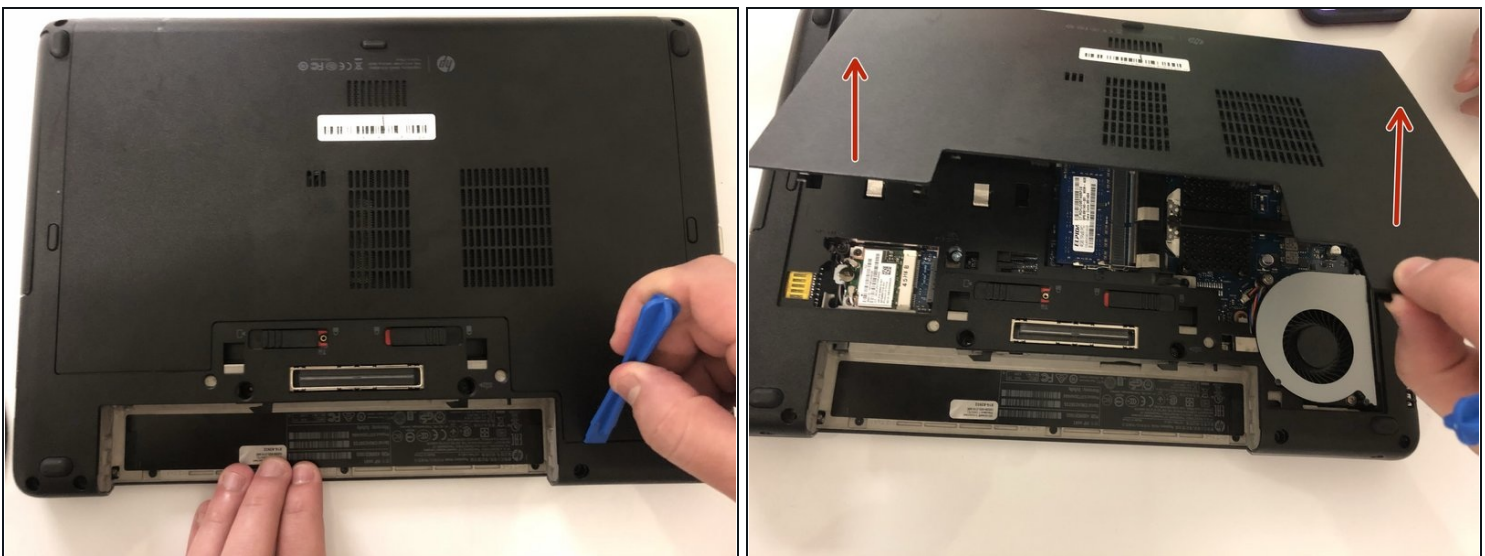

- Remove the middle plate using the iFixit opening tool.
- ⓘ May require a bit of force. If it is not coming out try the other side.


### Step 3



- Pop the back cover off from its latches by separating the these two parts along their seam using the iFixit opening tool.

ⓘ Gently, please! The plastic can crack.

### Step 4

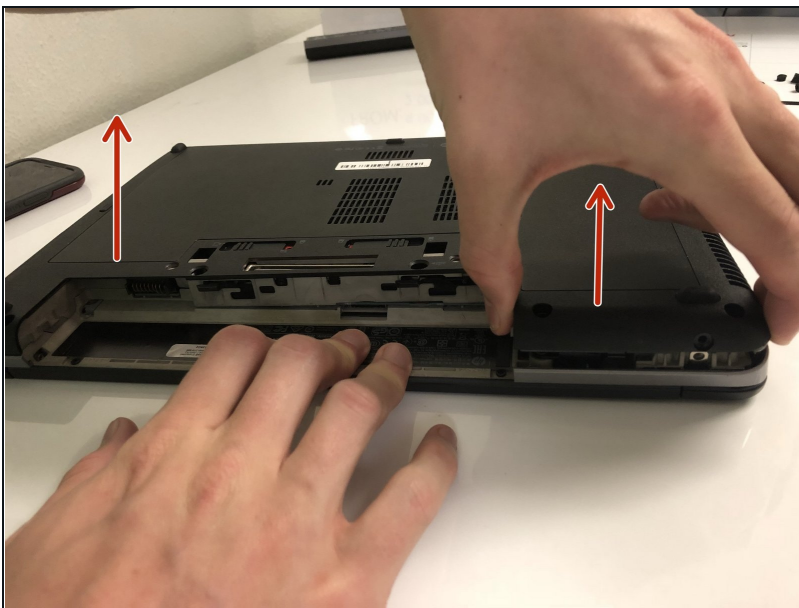

- Lift the back cover once all corners are unclashed from their latches.

ⓘ Lifting the cover should not require much force.

---

To reassemble your device, follow these instructions in reverse order.