



# turbidity Teardown

Written By: maxwell





## TOOLS:

- [Pro Tech Toolkit](#) (1)
-

## Step 1 — turbidity Teardown



- first thing u want to do is take out the two screws on each side of the meter and also take out all the screws on the bottom you will need a philips head screw driver



## Step 2



- Now unscrew the 4 screws on the face plate and you will be able to lift the cover off the meter but be careful as there are a few plugs and screws left for you to remove



### Step 3

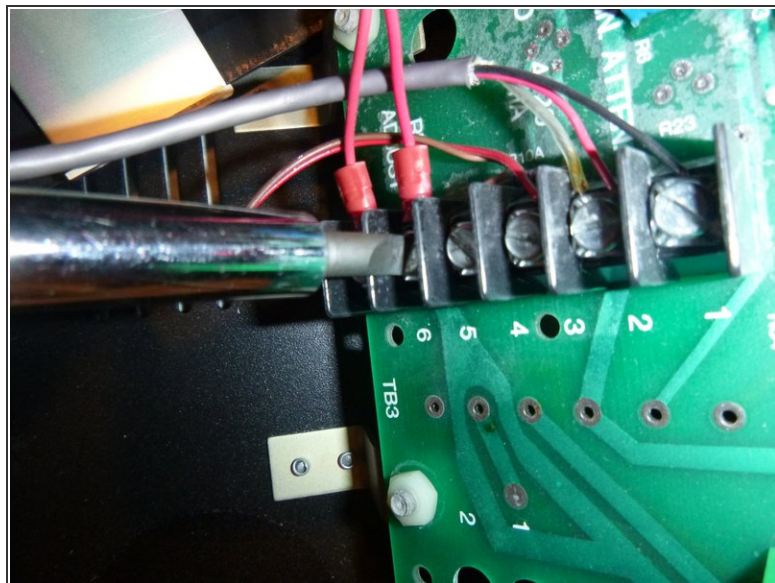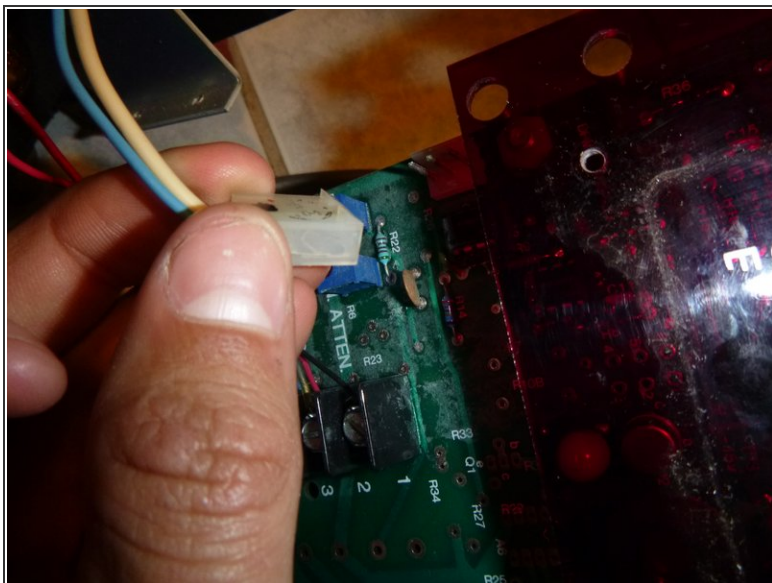



- Unplug the three prong plug and unscrew and pull out all the wires off the terminal block now you are able to take the cover completely off> the terminal block is basically a neat way of distributing power
- NOTE: mark where each wire goes on the terminal block for easy re installation

### Step 4



- Unscrew all the nuts shown using an adjustable wrench to remove circuit board

## Step 5

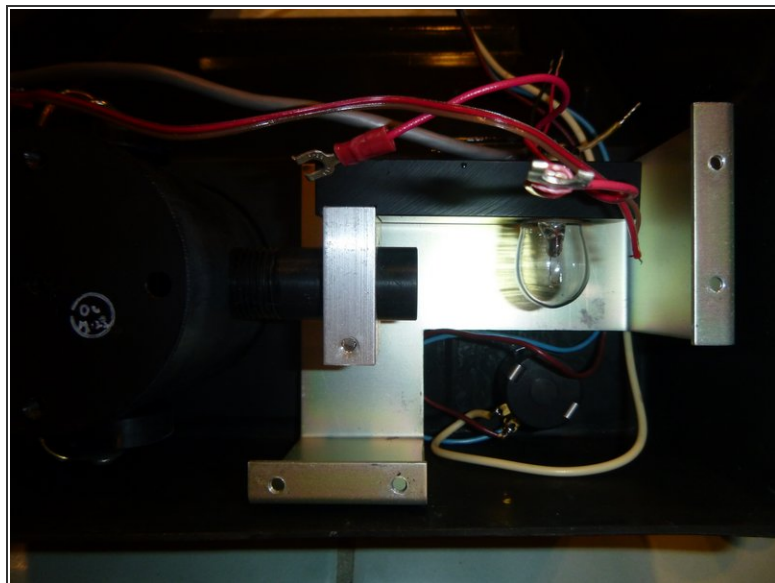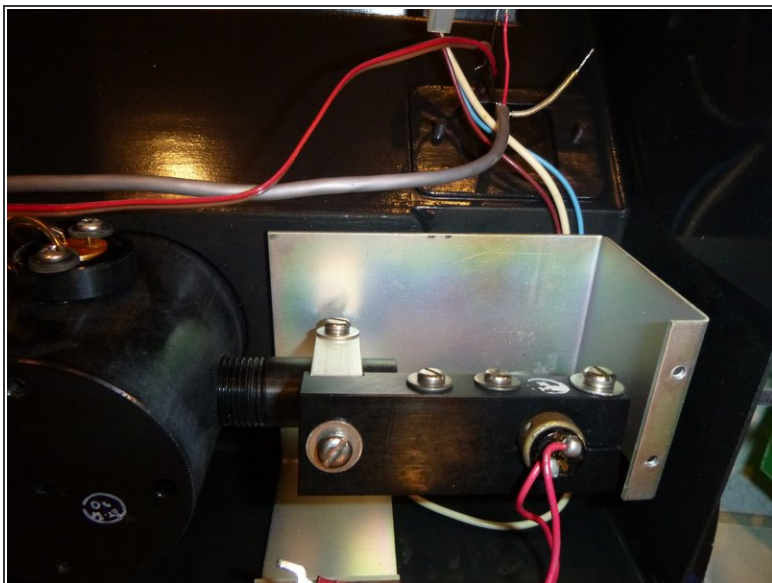

- tilt the bulb so screw access is available as shown then slide bulb canister off telescopic shaft

## Step 6



- tools used : philips head screwdriver  
flat head screwdriver adjustable  
wrench