




LG Rebel Motherboard Replacement

How to replace your LG Rebel Motherboard.

Written By: Justin Franklin

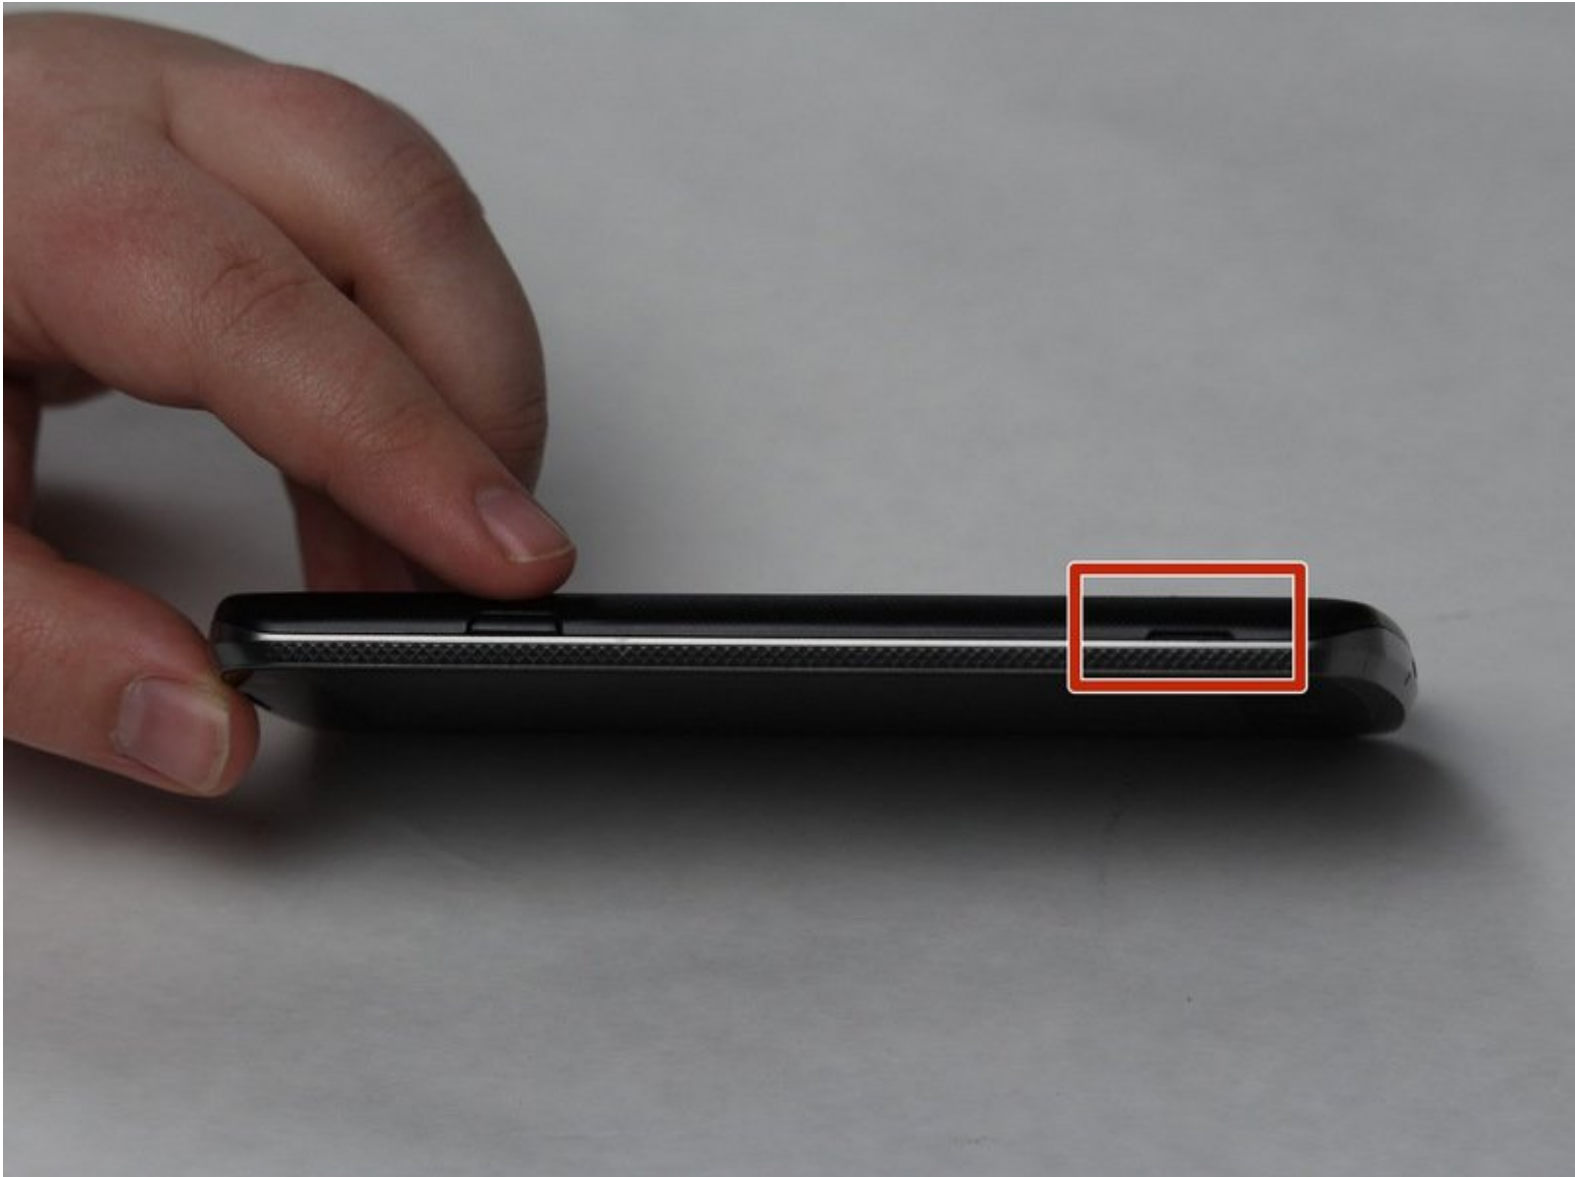


INTRODUCTION

This guide will demonstrate the replacement of an LG Rebel Motherboard. Use caution during disassembly as parts are small and can be lost or broken.

TOOLS:


- [Spudger](#) (1)
 - [Suction Handle](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Motherboard

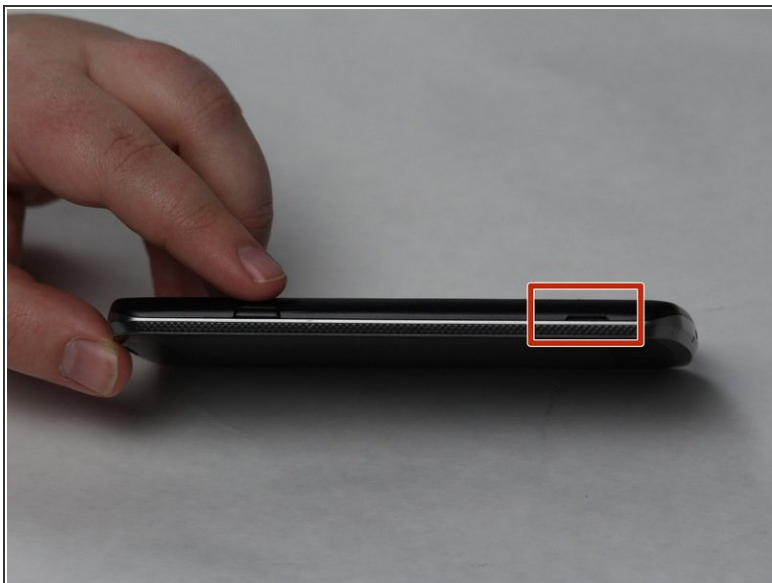


- Insert the plastic opening tool into the small groove on the side of the phone.
- Remove the back cover with the plastic opening tool.

Step 2

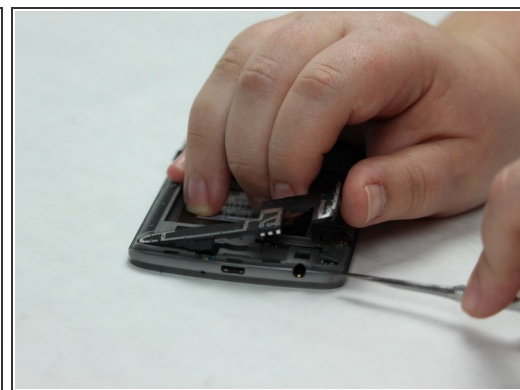

- Insert the metal spudger into the small groove on the back of the phone.
- Lift and remove the black plastic covering with the metal spudger.

Step 3

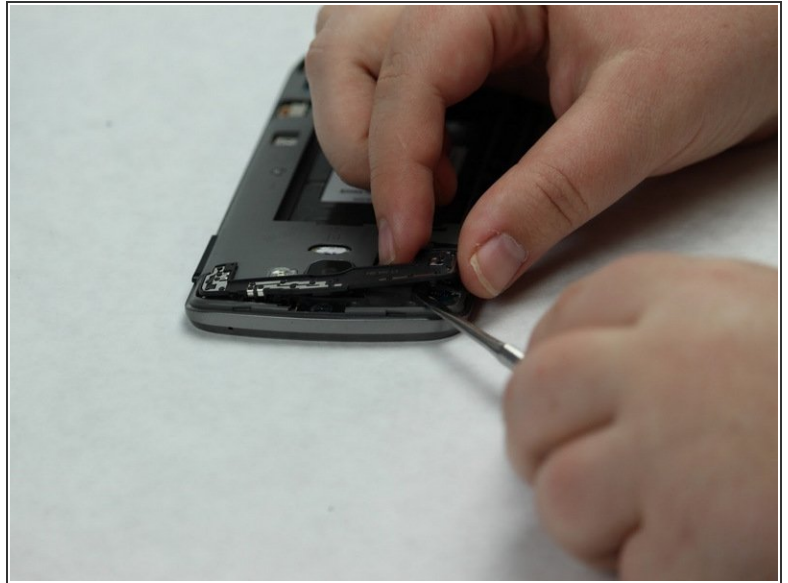

- Use the metal spudger to lift the remaining black plastic cover pieces.

Step 4




- Use the metal spudger to lift and disconnect the two connective pieces on the back of the phone.

Step 5




- Flip the phone, so that the screen is facing upwards.
- Slide the metal spudger along the perimeter of the phone in order to break the entire seal.
- Use the suction cup to lift and remove the screen.

Step 6

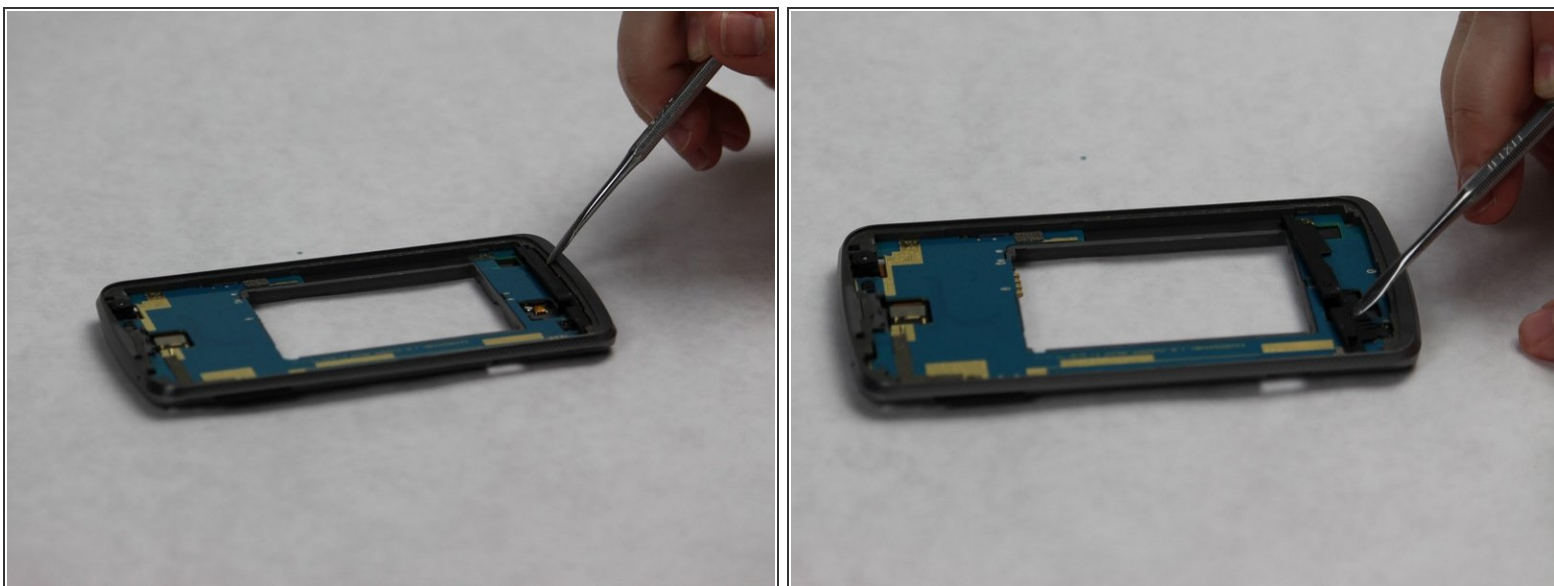

- Use the metal spudger to slide the black bumper out from the bottom of the phone.

Step 7

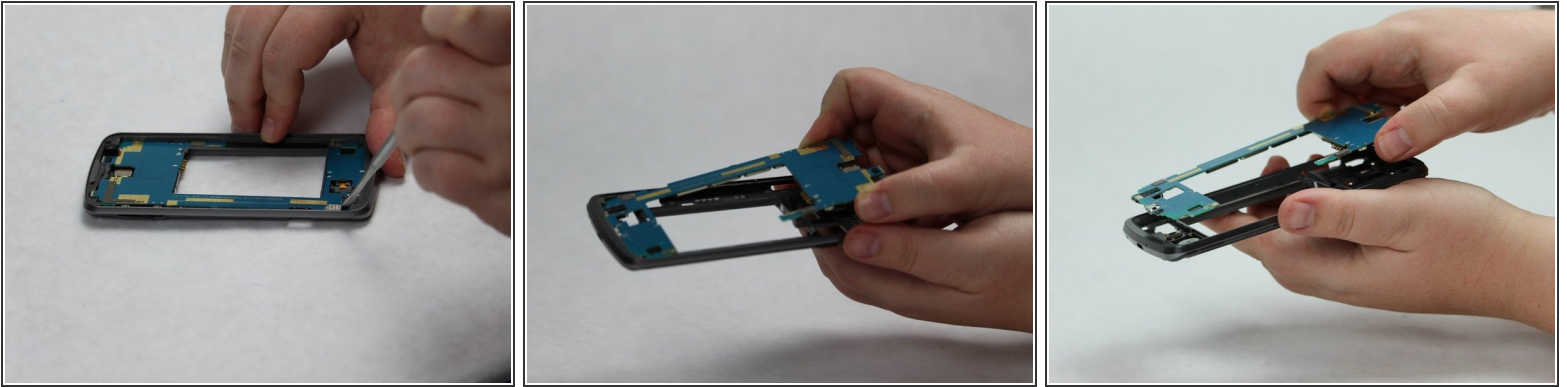

- Use the metal spudger to carefully loosen the motherboard from the body of the phone.
- Slowly slide the motherboard out of the body of the phone.
- Remove the motherboard.

To reassemble your device, follow these instructions in reverse order.