




# Samsung Galaxy Tab A 10.1 S-Pen Screen Replacement

This is a step by step guide showing how to replace the screen on a Samsung Galaxy Tab A 10.1 tablet.

Written By: Guneet Bawa

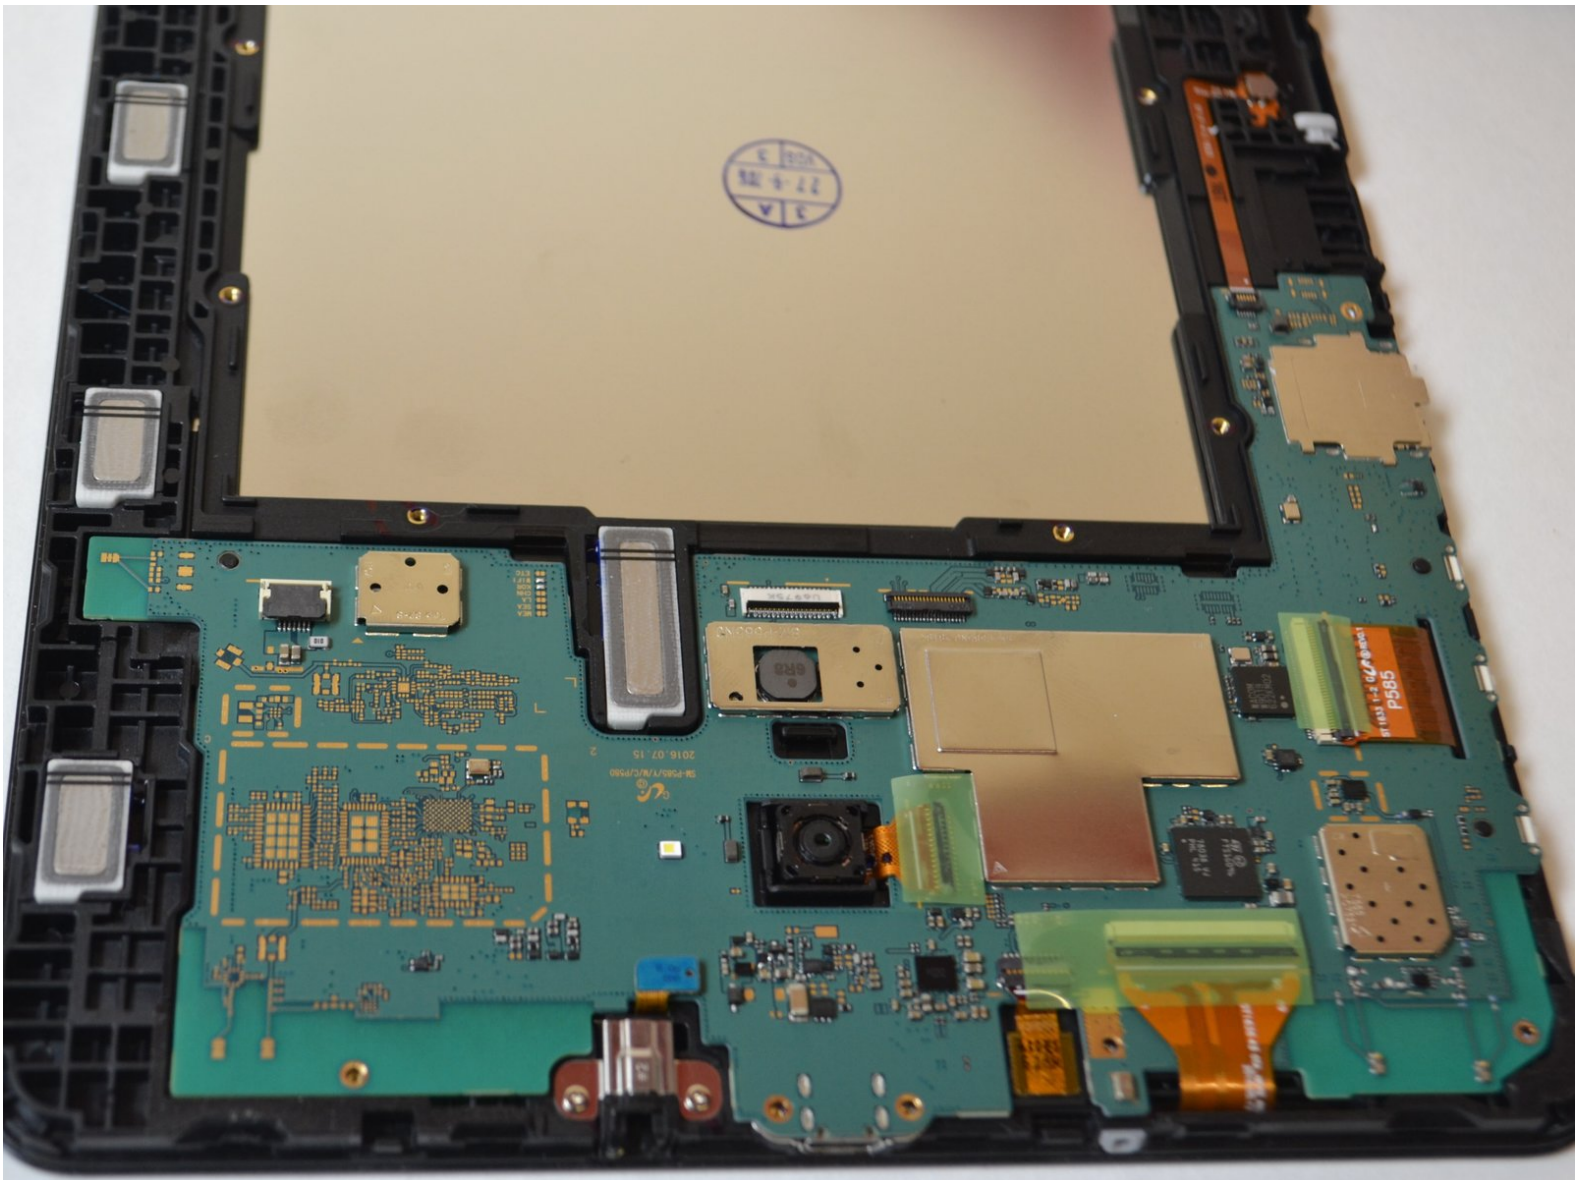

This document was generated on 2020-11-20 06:37:56 PM (MST).

# INTRODUCTION


This is a step by step guide showing how to replace the screen on a Samsung Galaxy Tab A 10.1 tablet.

---

## TOOLS:




- [Phillips #000 Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery

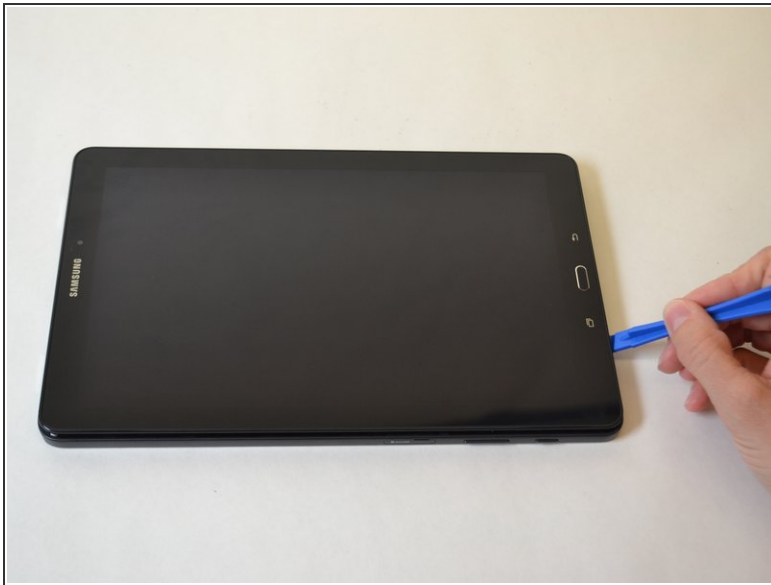

- Remove all external power and turn off the tablet.
- Insert a plastic opening tool between the screen and rear casing.
- Pry the screen and rear casing apart.


## Step 2

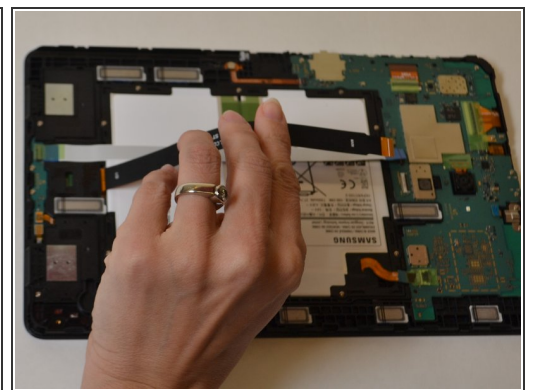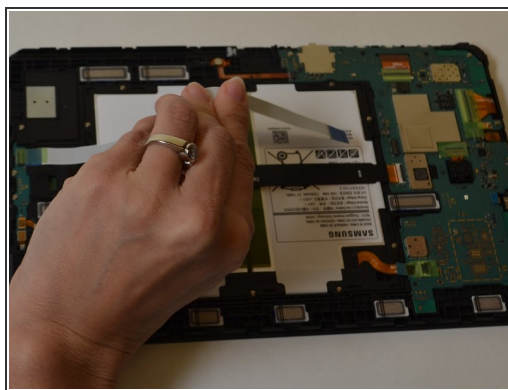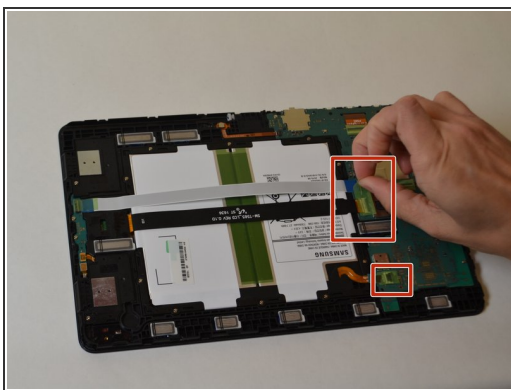

- Remove the three green pieces of tape covering the white, black, and gold ribbon cables.
- Use a spudger to flip up the retaining flap on the three ribbon cable [ZIF](#) sockets.
- Pull the ribbon cables out of the sockets.




## Step 3

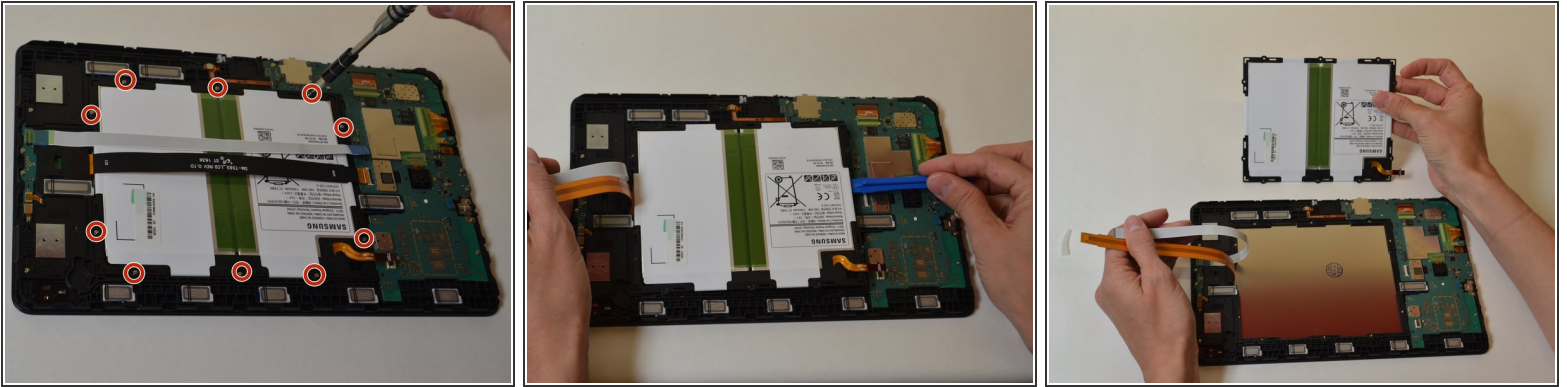


- Remove the ten 4mm Phillips #000 screws from the battery.
- Use a plastic opening tool to pry up the battery.
- Remove the battery.

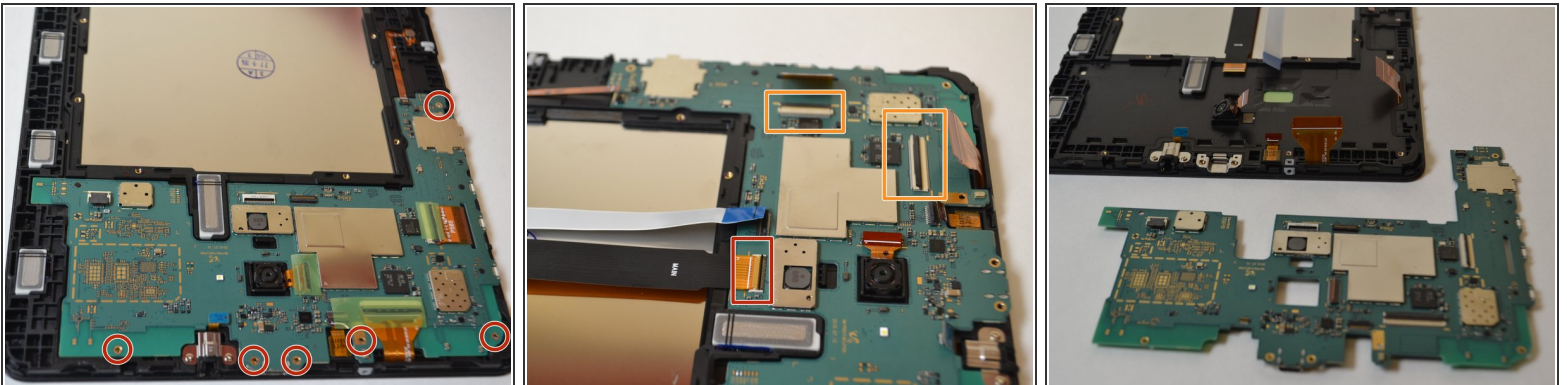

## Step 4 — Screen



- Remove the six 4mm Phillips #000 screws from the motherboard.
- Use a spudger to flip up the retaining flap on the ribbon cable [ZIF](#) sockets.
- Use the plastic opening tool to remove the motherboard from the case.
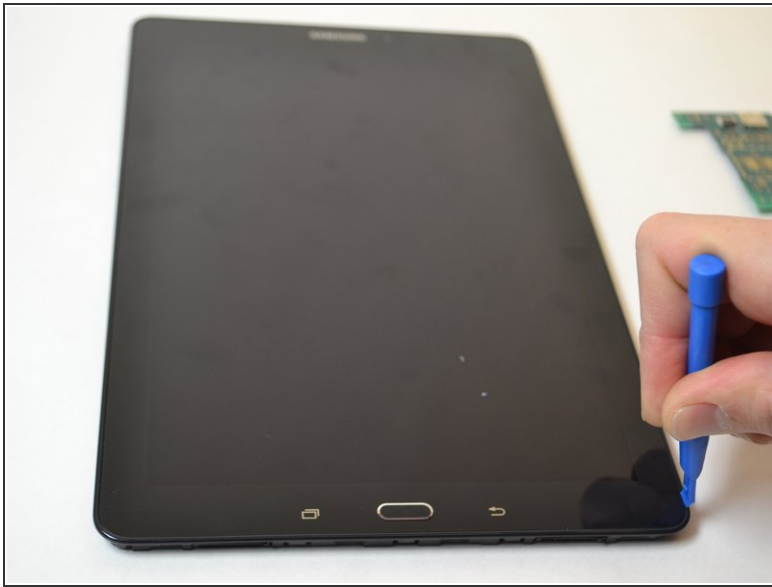
## Step 5



- Insert a plastic opening tool between the screen and bezel.
  - Slide the plastic opening tool around the perimeter while prying upwards until the screen separates from the bezel.
-  The screen may crack during this process so be wary of broken glass.
-  Applying heat may be necessary to loosen the glue.

To reassemble your device, follow these instructions in reverse order.