


# **Dell Inspiron 15 3568 Hard Drive Replacement**

Written By: Terrence15

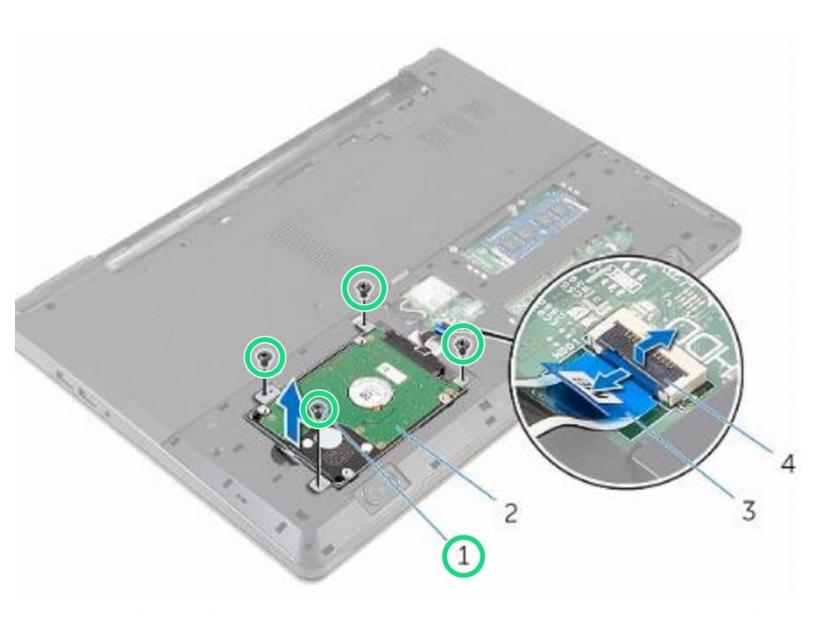

# **INTRODUCTION**


In this guide, we will show you how to remove and replace the Hard Drive.



# **TOOLS:**


• Phillips #0 Screwdriver (1)

#### Step 1 — Remove the Screws

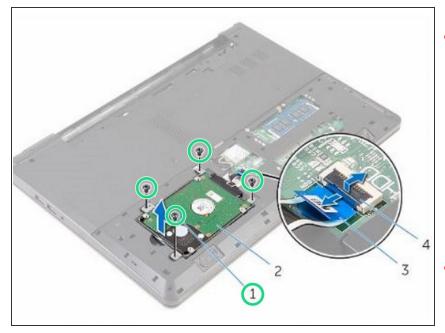

- WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in Before Working Inside Your Computer. After working inside your computer, follow the instructions in After Working Inside Your Computer.
- CAUTION: Hard drives are fragile. Exercise care when handling the hard drive.
  - Remove the screws that secure the hard-drive assembly to the computer base.


## Step 2 — Lifting the Latch

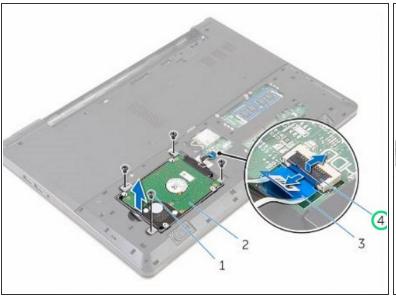




• Lift the latch and disconnect the hard-drive cable from the system board.

# **Step 3** — Lifting the Hard-Drive Assembly

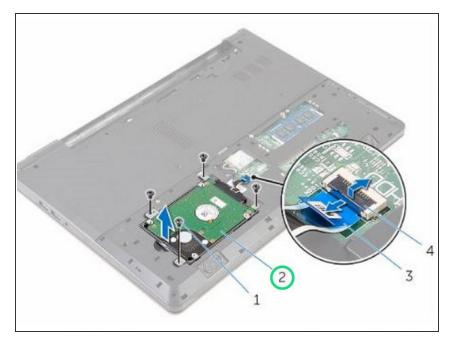


 Lift the hard-drive assembly off the computer base.

# **Step 4** — **Disconnecting the Interposer**

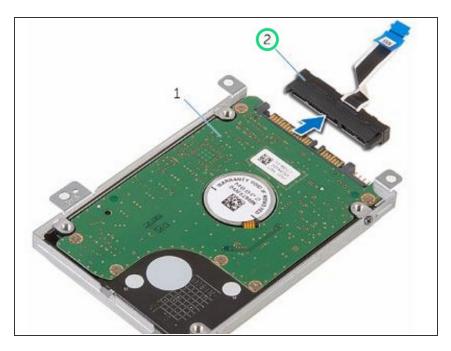


 Disconnect the interposer from the hard drive.

# Step 5 — Remove the Screws

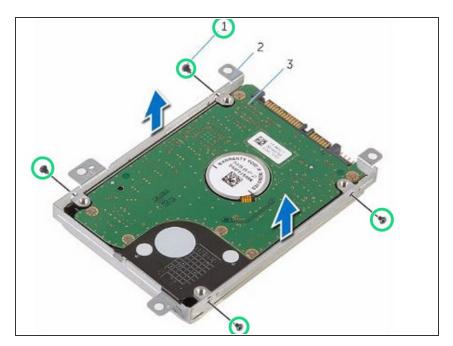


 Remove the screws that secure the hard-drive bracket to the hard drive and lift the hard-drive bracket off the hard drive.

## **Step 6** — Placing the Hard-Drive Bracket

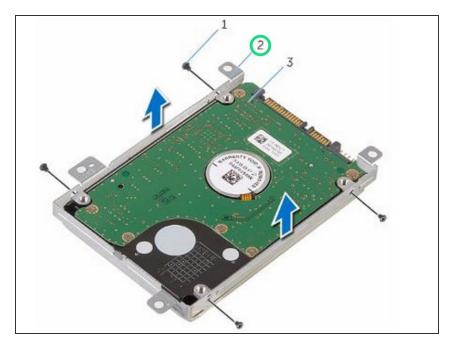


 Place the hard-drive bracket over the **NEW** hard drive and align the screw holes on the hard-drive bracket with the screw holes on the hard drive.

## Step 7 — Replace the Screws

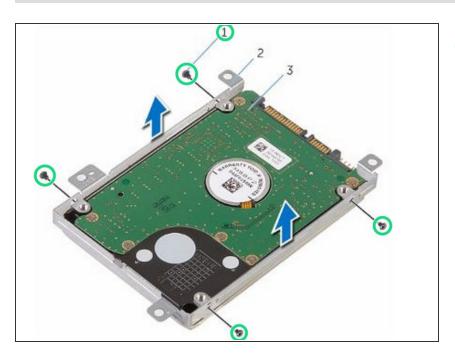


 Replace the screws that secure the hard-drive bracket to the hard drive.

## **Step 8** — **Sliding the Hard-Drive Assembly**

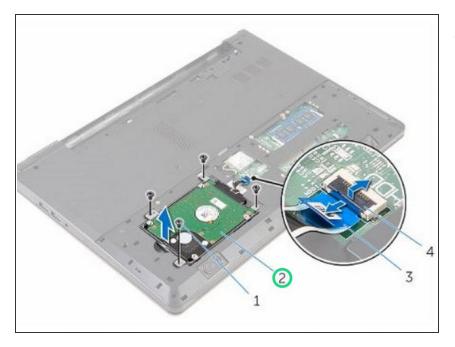


 Slide the hard-drive assembly in the computer base and align the screw holes on the hard-drive assembly with the screw holes on the computer base.

## Step 9 — Slide the Hard-Drive Cable

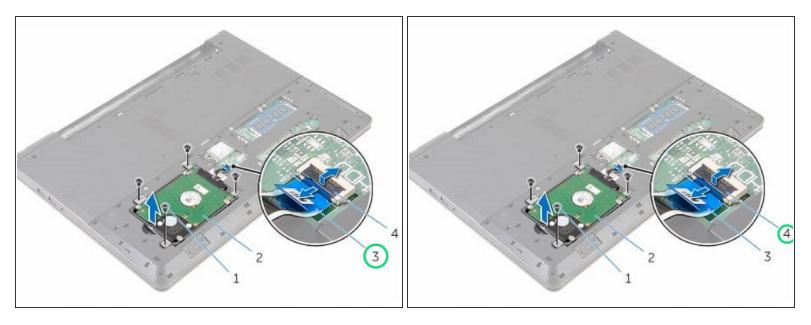

Slide the hard-drive cable into its connector and close the latch to secure the cable.

# Step 10 — Replace the Screws

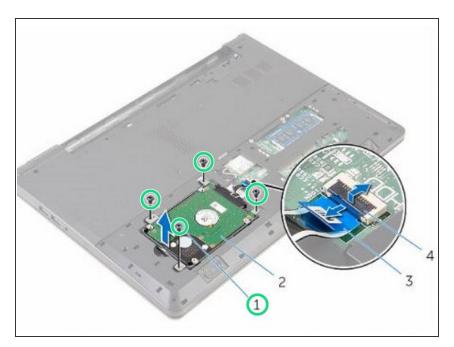

 Replace the screws that secure the hard-drive assembly to the computer base.