




Asus ROG G55VW-DH71 Sound Bar Replacement

How to replace speakers in the Asus ROG G55VW-DH71.

Written By: Savanna Stockman

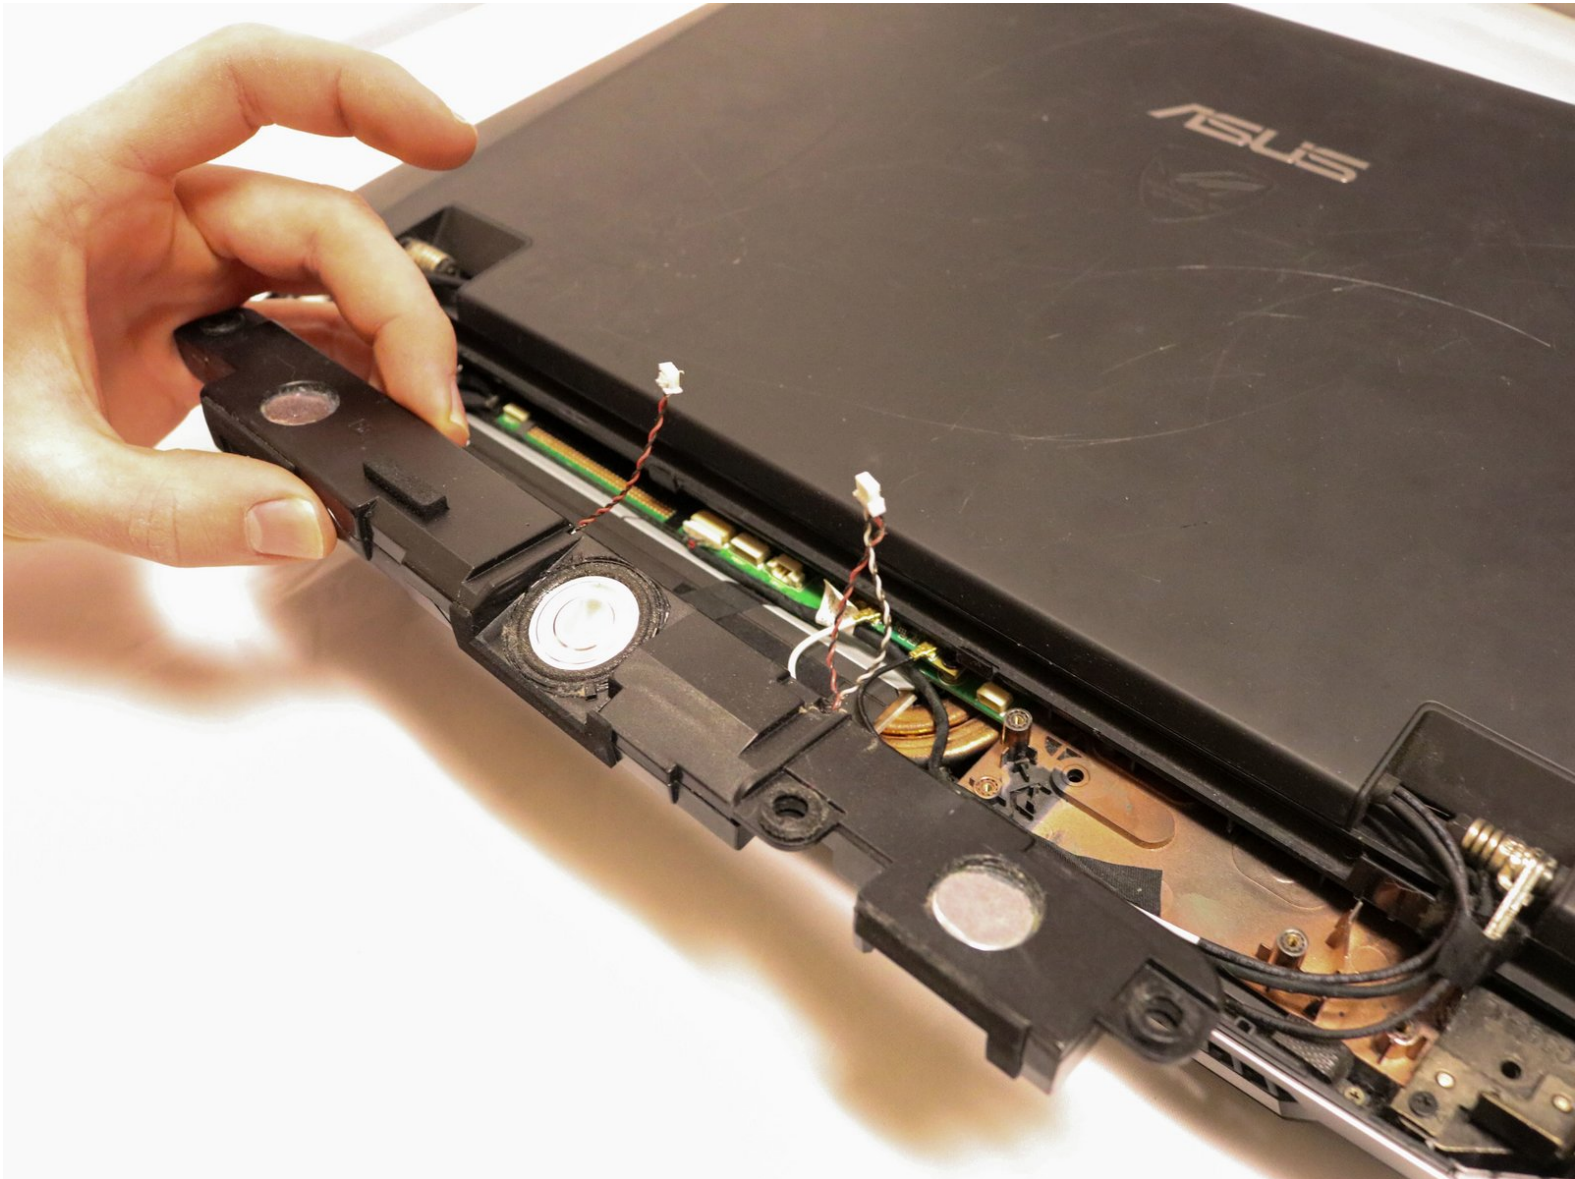

INTRODUCTION

Experiencing audio troubles with your Asus ROG G55VW-DH71? Simply replace it by using this five step guide!

Great audio is a necessity for any computer user and your ROG G55VW-DH71 may be in need of an upgrade. Through this guide, your auditory needs and computer experience can be enhanced in only two minutes.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Sound Bar



- Side the switch and lift the battery from the back of the device.

Step 2



- Using the PH0 screw driver remove both 4.4 mm screws.
- Using the PH0 screw driver remove the 6.4 mm screw.

Step 3





- Using the iFixit opening tool, gently pry open the plate covering the spine of the device.

Step 4



- Using the PH 00 screwdriver, remove the three 10.6 mm screws holding the sound bar down.

Step 5

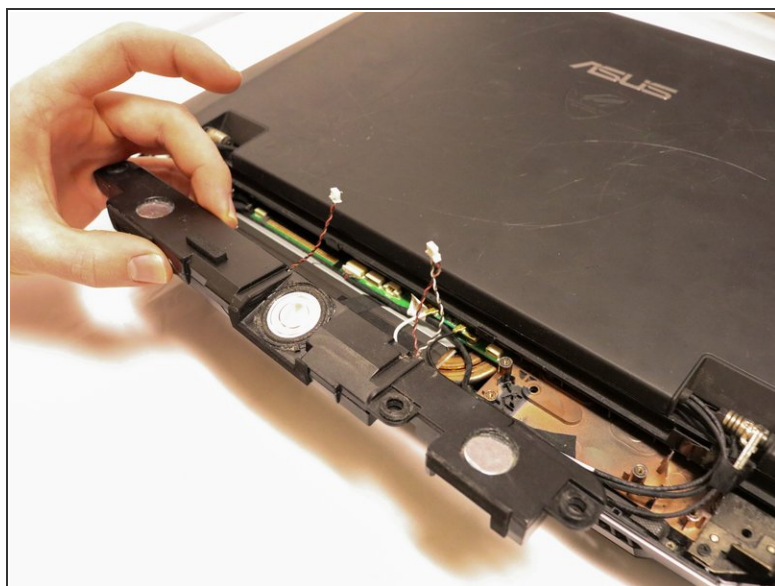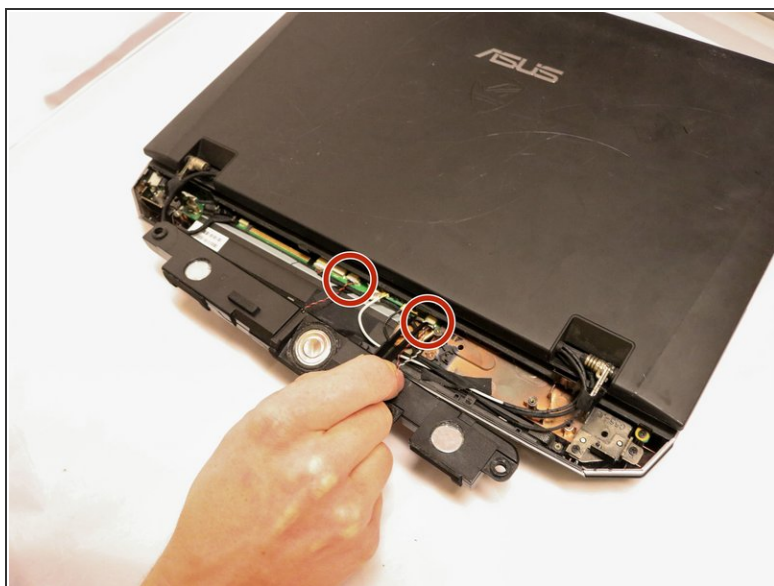

- Using the bent black tweezers, remove both wires connecting the sound bar to the motherboard.

To reassemble your device, follow these instructions in reverse order.