



Huawei Honor 10 Rear Glass Removal

This guide shows how to remove or replace the rear glass on the Huawei Honor 10.

Written By: Dominik Schnabelrauch



INTRODUCTION

Use this guide to remove or replace the rear glass in the Huawei Honor 10.

You'll need **replacement adhesive** to reattach components when reassembling the device.

TOOLS:

- [iOpener](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
 - [Suction Handle](#) (1)
-

Step 1 — Rear Glass



- Before you begin, switch off your phone.
- Apply a [heated iOpener](#) to a long edge of the phone to loosen the adhesive beneath the rear glass. Apply the iOpener for at least two minutes.

Step 2



- ⓘ If the phone's rear glass is cracked, the suction cup may not stick. Try [lifting it with strong tape](#), or superglue the suction cup in place and allow it to cure so you can proceed.
- Press a suction cup onto the back cover.
 - Lift the back cover's right edge with your suction cup, opening a slight gap between the back cover and the frame.
 - Insert the tip of an opening pick in the gap you created and slide it to the bottom right corner.

Step 3



ⓘ [Apply more heat](#) if the adhesive becomes hard to cut. During the removal process, the back cover is under tension all the time and is likely to break if the adhesive isn't softened enough.


- Insert a second opening pick at the bottom right corner of the rear glass.
- Slide the opening pick along the bottom edge of the rear glass to cut the adhesive and leave it in the bottom left corner.

Step 4



- Insert a third opening pick at the bottom left corner of the rear glass.
- Slide the opening pick along the left edge of the rear glass to cut the adhesive.
- Leave the opening pick at the top left corner of the rear glass.

Step 5

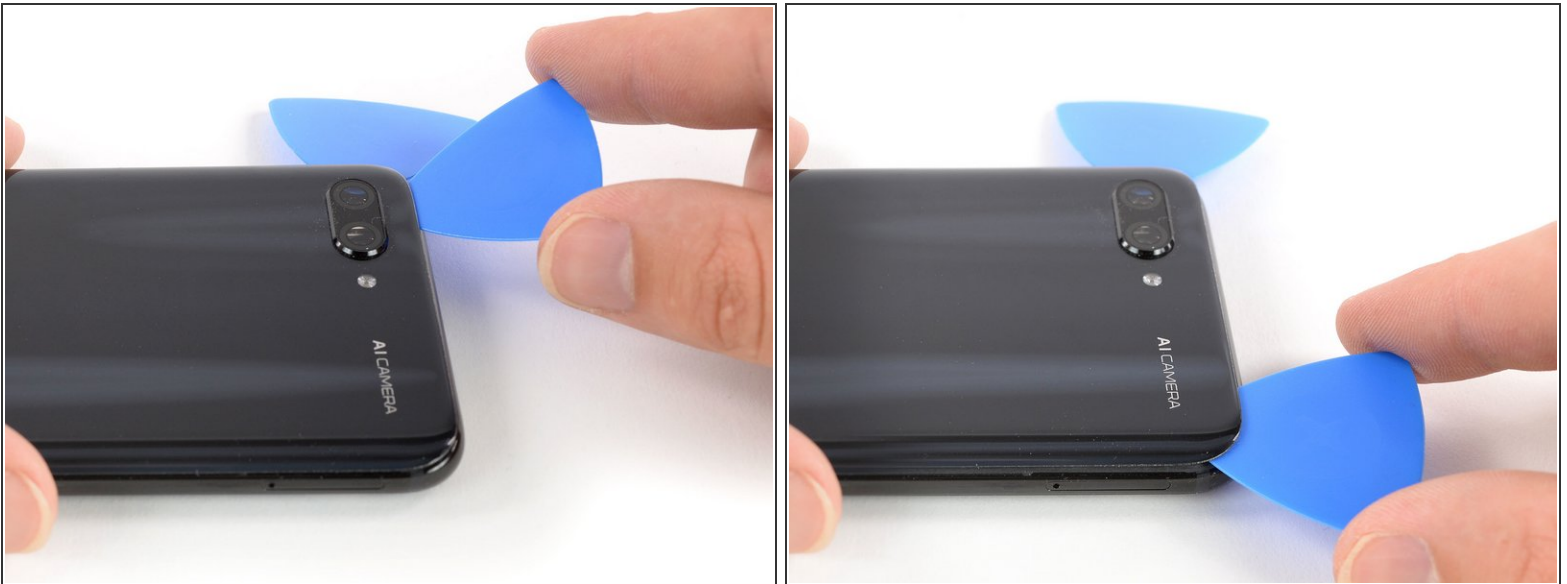

- Insert a fourth opening pick at the top left corner of the rear glass.
- Slide the opening along the top edge of the rear glass and cut the remaining adhesive with it.

Step 6



- Carefully lift the rear glass of the Huawei Honor 10 and remove it.

Secure the new back cover with pre-cut adhesive or double-sided adhesive tape.

To reassemble your device, follow these instructions in reverse order.

After installing the rear cover, apply strong, steady pressure to your phone for several minutes to help the adhesive form a good bond, such as by placing it under a stack of heavy books.

Repair didn't go as planned? Check out our [Answers community](#) for troubleshooting help.