



# Removing Audio Technica ATH-AD500 Foam Disks

If your headphones are producing too much bass, remove the foam disks.

Written By: Melanie Reis



---

## INTRODUCTION

This installation guide will help you with the following:

- removing foam disk
- decreasing the bass



### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Speaker Assembly



- Remove the ear pads by peeling them away from the grill.

## Step 2



- Remove all four 1cm screws on the inside of the headphone using a #1 Phillips head.


### Step 3



- Remove the speaker from the grill by pulling it out.

**⚠ Remove the speaker carefully so you do not rip the wires out.**

### Step 4 — Foam Disks

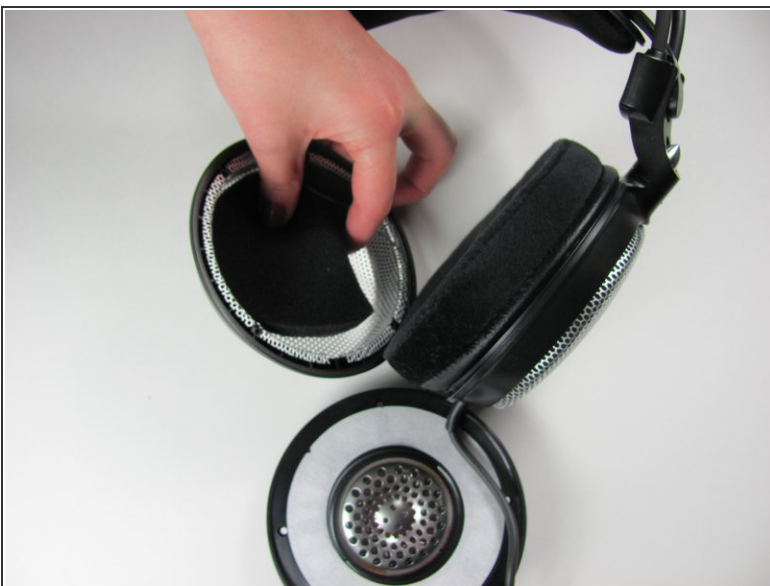

- Remove the foam disk from the grill by peeling it away from the grill.
- (i)** During reassembly, make sure that the speaker is angled into your ear canal.

To reassemble your device, follow these instructions in reverse order.