



# Replacing Nokia X3-02 LCD

Replacing LCD

Written By: Matteo Moro





## TOOLS:

- [iFixit Opening Tools](#) (1)
- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [T5 Torx Screwdriver](#) (1)





## PARTS:

- [New Nokia X3 LCD](#) (1)



## Step 1 — LCD

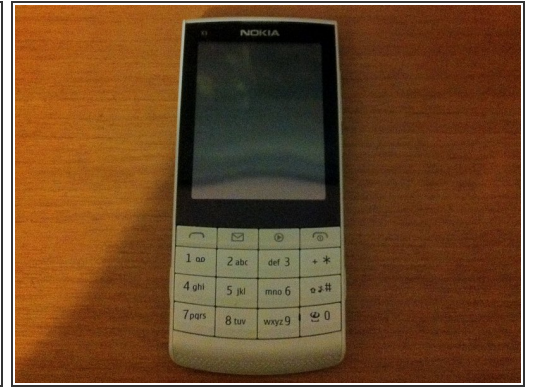

 Before disassembling your phone, be sure it is powered off.

- To remove the back cover press the two "buttons".
- Remove the battery.


## Step 2




- Remove the three 3mm black screws on the top of the phone.
  - Remove the two 5mm screws.
  - Loosen these two screws at the bottom of the phone.
- ⓘ Probably these screws will not come out from their home, no matter. It is only important to unscrew them completely.

## Step 3



- With a plastic opening tool remove the little piece of plastic in the bottom of of the phone.  
 The two corners marked are VERY SLENDER, when removing the plastic be very careful. Otherwise you will break them.
- To remove the logic board assembly push from the rear of the phone.

## Step 4

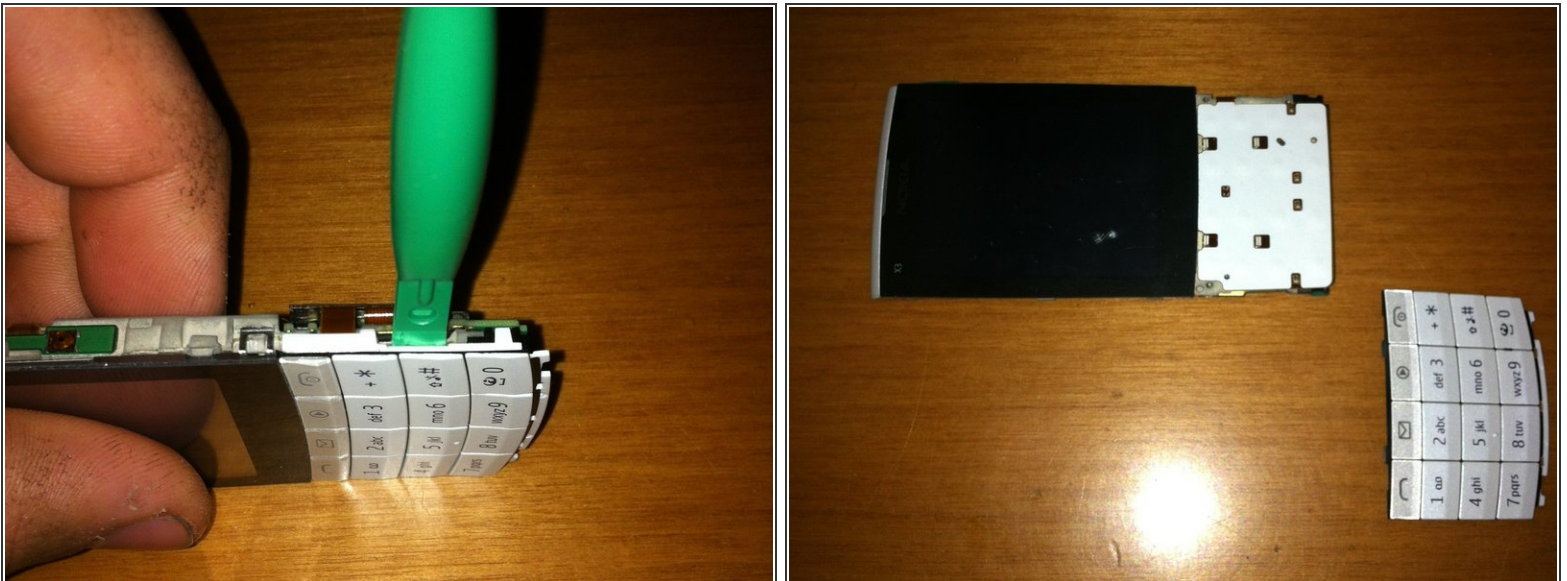

- Remove the keyboard with a plastic opening tool.

To reassemble your device, follow these instructions in reverse order.