



# Sanyo Katana Screen Protector Replacement

This guide will instruct on how to disassemble the transparent screen that protects the internal liquid-crystal display (LCD) of the phone.

Written By: StephenYH



---

## INTRODUCTION


This guide does not require any prerequisite steps. Flip open the phone and begin the guide.

---

### TOOLS:

- [Spudger](#) (1)
  - [Tri-point Y0 Screwdriver](#) (1)
-

## Step 1 — Screen Protector

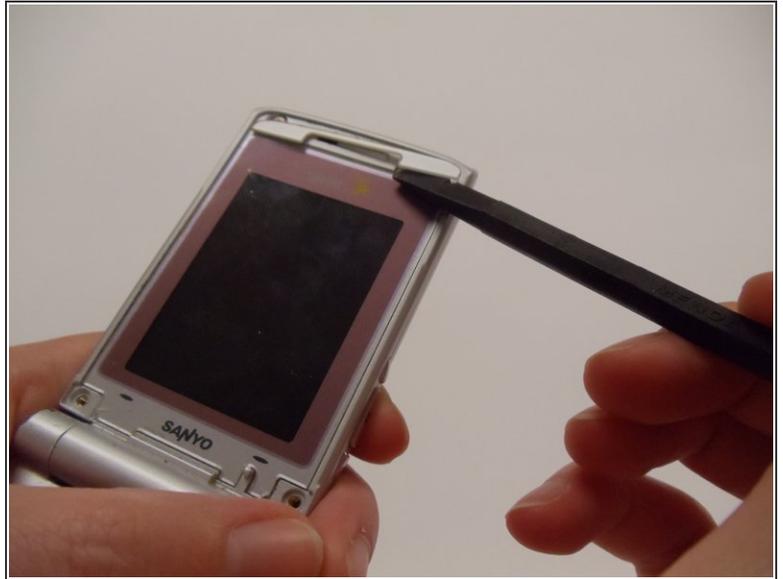

- With the flat end of a spudger, remove the plastic covers located on the corners of the display near the hinge and above the screen, revealing four screws underneath.

## Step 2



- Remove the 4.4mm screw in each corner using the Tri-wing Y0 screwdriver.

### Step 3



- Carefully pry the screen protector off the phone using the flat end of the spudger.
  - ⚠ This will require a bit of force as the back of the screen protector is lined with an adhesive material.
- Once free from the adhesive, pull the screen protector away from the phone.

To reassemble your device, follow these instructions in reverse order.