



# EDCO Floor Stripper TS8 .75L (2017) Blade Retainer Replacement

How to remove and replace the blade retainer on an EDCO Floor Stripper TS8 .75L (2017).

Written By: Robert Boyd



## INTRODUCTION

This is a prerequisite-only guide! This guide is part of another procedure and is not meant to be used alone.

Follow this guide to remove and replace the blade retainer on an EDCO Floor Stripper TS8 .75L (2017).

The hood is removed in the photos, but the procedure is the same.



### TOOLS:


- [Wheel Chocks](#) (1)
- [3/16" Hex Key](#) (1)



### PARTS:

- [Edco Retainer-Scraper Blade 28146](#) (1)

## Step 1 — Safety precautions

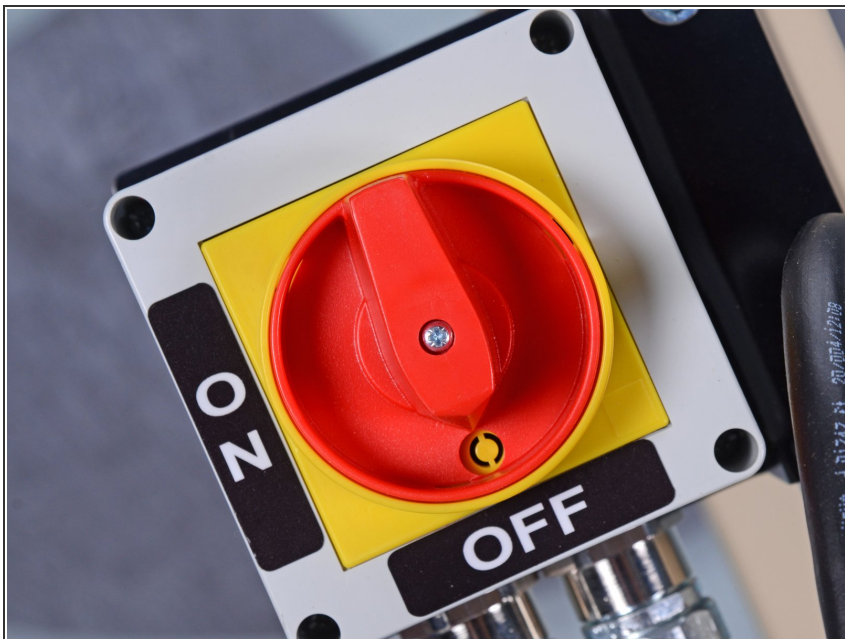

⚠ Before you begin, ensure the device is powered down and cool to the touch.

- Ensure the machine is unplugged.
- Turn the power switch counterclockwise into the **OFF** position.

## Step 2 — Tilt the device




- Tilt the device back to rest on its handle.

⚠ Ensure that the four 9/16 inch motor mount bolts are tightened before tilting the device.




### Step 3 — Chock the wheels

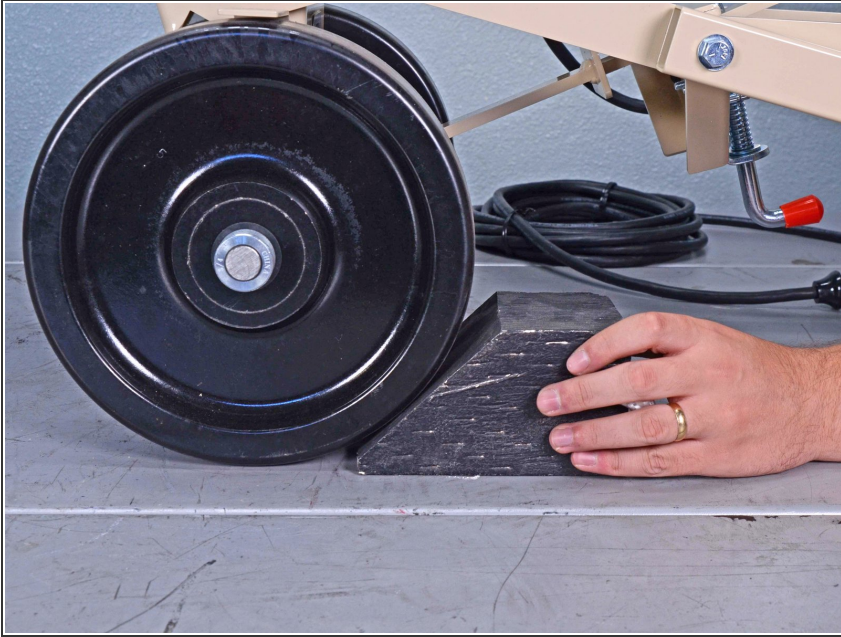

- Insert wheel chocks behind the wheels to ensure the device does not move or fall during the repair."

### Step 4 — Remove the blade retainer

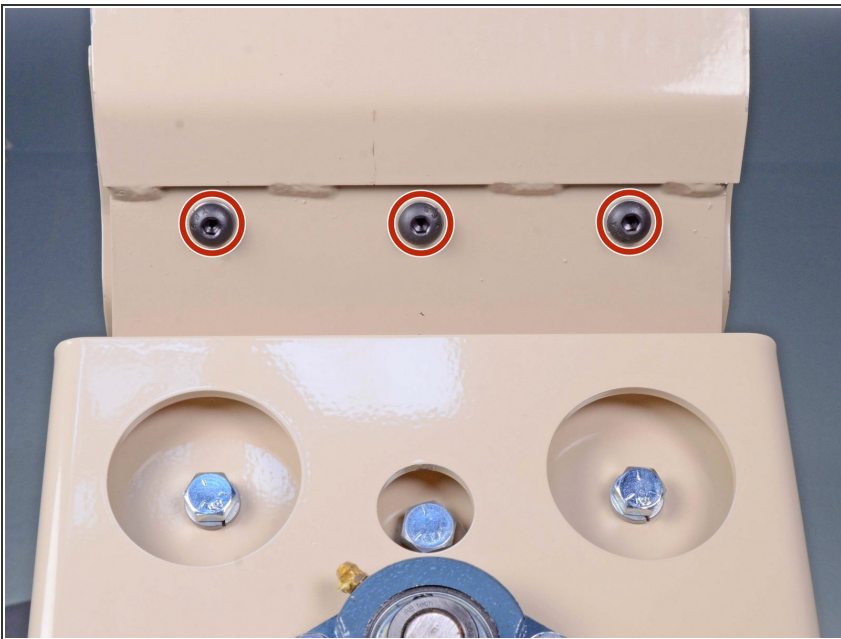

- Use a 3/16 inch hex key to remove the three bolts securing the blade retainer.

## Step 5



- Remove the blade retainer.

To reassemble your device, follow these instructions in reverse order.