



# Tilting the EDCO Floor Stripper TS8 .75L (2017)

How to safely tilt the EDCO Floor Stripper TS8 .75L (2017) with wheel chocks.

Written By: Robert Boyd



## INTRODUCTION

This is a prerequisite-only guide! This guide is part of another procedure and is not meant to be used alone.

Follow this guide to safely tilt the EDCO Floor Stripper TS8 .75L (2017) with wheel chocks.




### TOOLS:

- [Wheel Chocks](#) (1)



## Step 1 — Safety precautions

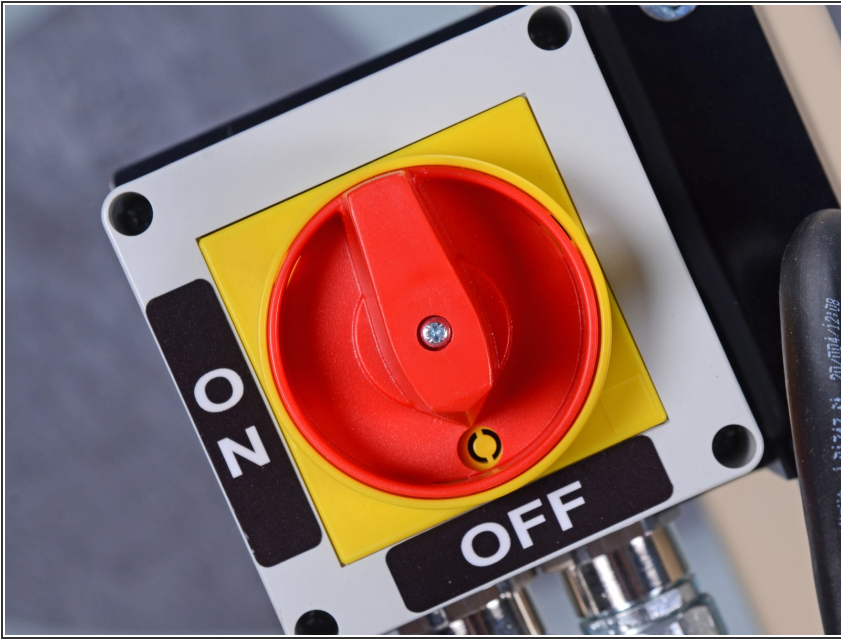

⚠ Before you begin, ensure the device is powered down and cool to the touch.

- Ensure the machine is unplugged.
- Turn the power switch counterclockwise into the **OFF** position.


## Step 2 — Tilt the device



- Tilt the device back to rest on its handle.

⚠ Ensure that the four 9/16 inch motor mount bolts are tightened before tilting the device.

### Step 3 — Chock the wheels

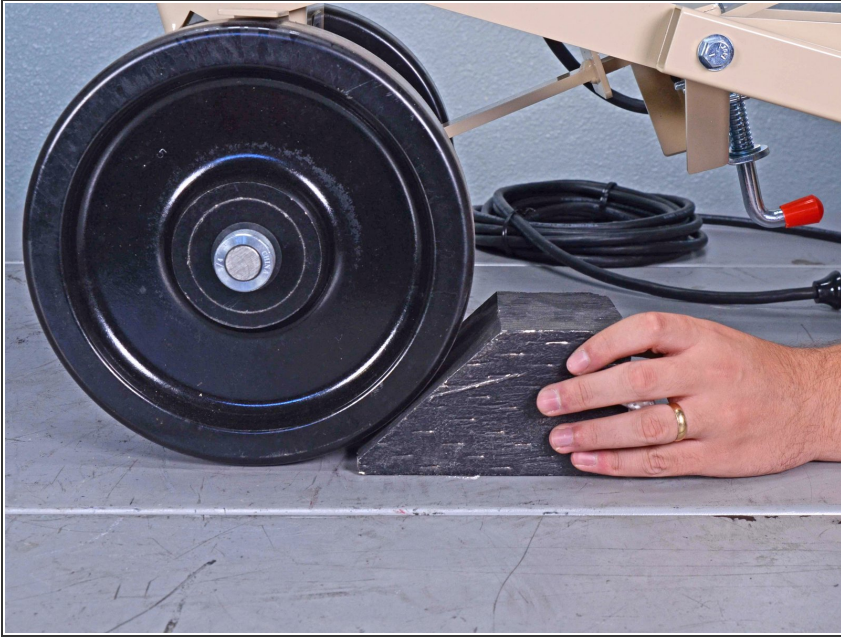

- Insert wheel chocks behind the wheels to ensure the device does not move or fall during the repair."

To reassemble your device, follow these instructions in reverse order.