

Fisher Rock'n Beats FBX 490 Main Subwoofer Replacement

How to replace the subwoofer in a Fisher Rock'n Beats FBX 490 speaker.

Written By: Matthew Fetyko



INTRODUCTION

This guide is useful for anyone who has broken the subwoofer on their Fisher Rock'n Beats FBX 490. Make sure the speaker is off before starting the guide. There are many fragile parts so use caution when prying or removing wires.



TOOLS:

- IFixit Phillips #00 Screwdriver (1)
- Metal Spudger (1)

Step 1 — Main Subwoofer



 Remove the four screws from the outer cage of the speaker using a Phillips #00 screwdriver.

Step 2



 Remove the four screws from the outer edge of the speaker using a Phillips #00 screwdriver.

Step 3




 Remove the four screws from the top panel of the controls using a Phillips #00 screwdriver.

Step 4



 Using a prying tool, gently remove the subwoofer from its hole.

Step 5

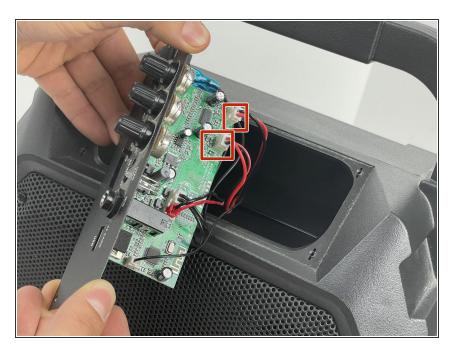

- Remove the panel gently.
- Unplug the bottom two wires on the panel.

Step 6



Remove the subwoofer gently.

To reassemble your device, follow these instructions in reverse order.