




# Nokia 1100b RH-36 Motherboard and Keyboard Replacement

Replace a defective keyboard or motherboard in your Nokia 1100b RH-36.

Written By: James Szelenyi

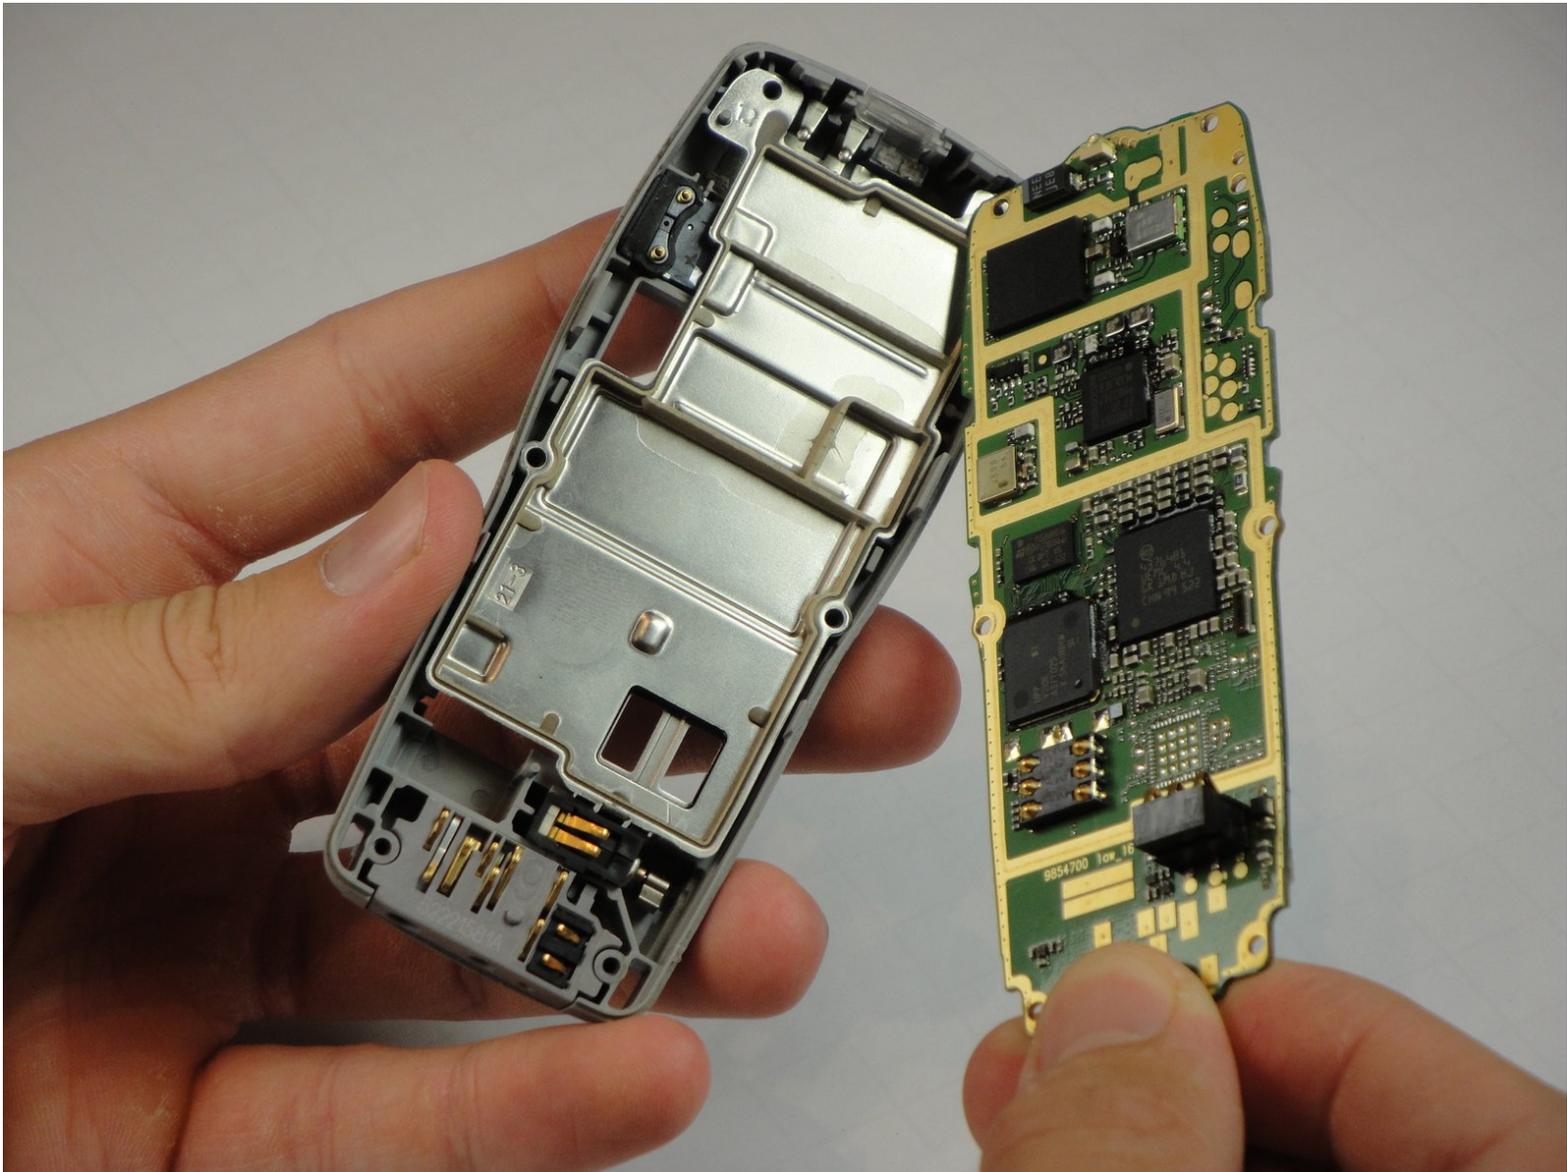

---

## INTRODUCTION

This guide will show you how to install a new motherboard and keyboard unit in your phone.

---

### TOOLS:


- [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Battery Cover



- Flip the phone over so that the screen faces down.
- Press the gray button on the battery cover and slide it down off the back of the phone.

## Step 2 — Battery

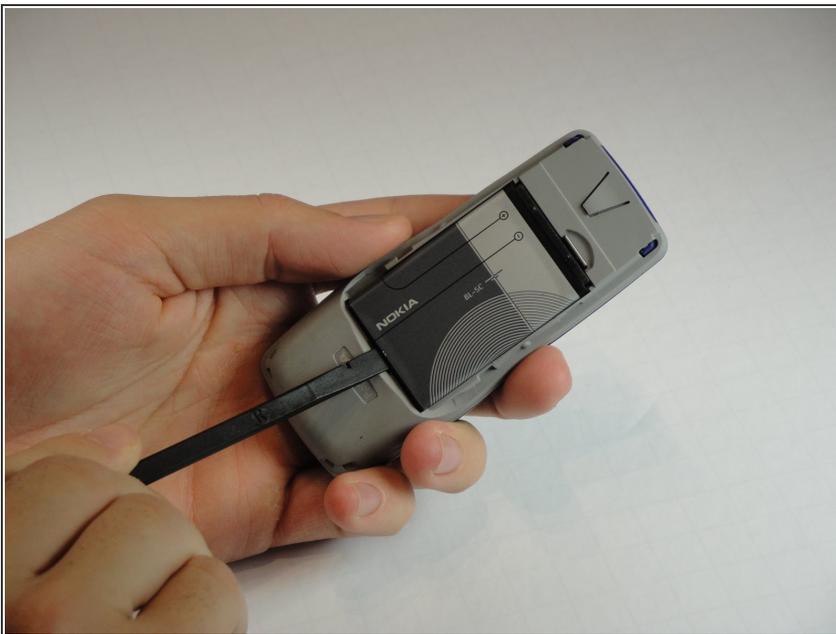


- Wedge the flat end of the spudger into the small indent next to the Nokia logo on the battery.
- Gently pry the battery out of the phone.

### Step 3 — Inner Casing



- Remove the six 6mm T6 Torx screws around the edge of the front of the phone.
- Remove the metal frame holding the screen and speaker.

### Step 4 — Motherboard and Keyboard

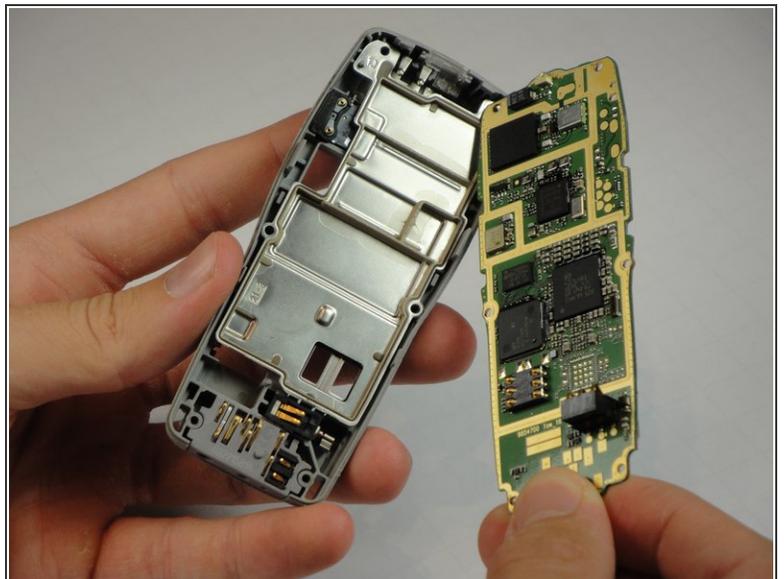

- Gently lift motherboard unit out of the case.
- The motherboard and keyboard are one unit and are replaced together.

To reassemble your device, follow these instructions in reverse order.