




Motorola V60s Logic Board Replacement

This guide shows how to replace the logic board.

Written By: Eric Freeman

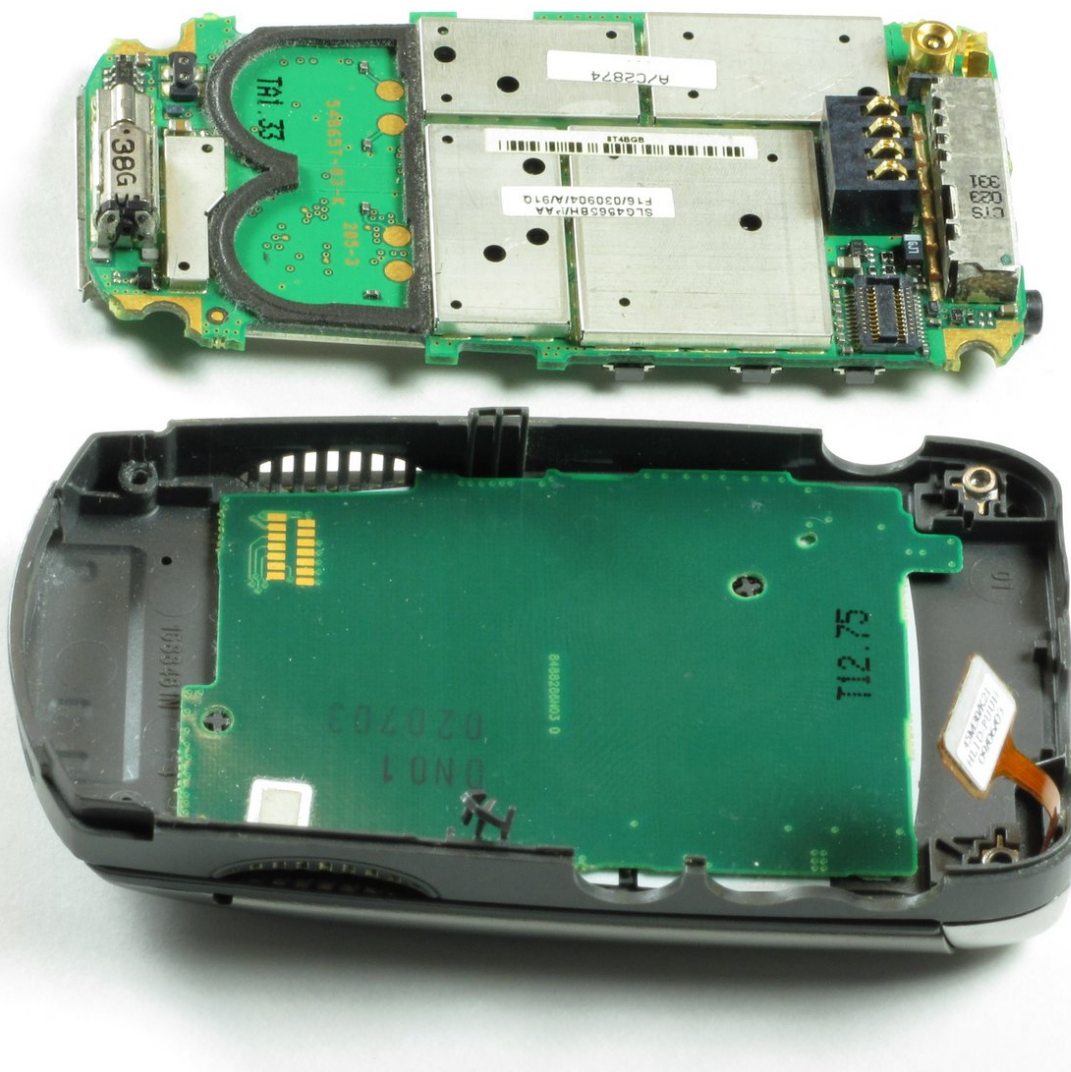

INTRODUCTION

This guide shows how to replace the logic board.



TOOLS:

- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)



PARTS:

- [Motorola V60 Logic Board](#) (1)

Step 1 — Battery



- Push in release lever towards top of phone, then use blue spudger to pry case off.
- After case is removed from the back of the phone, you can simply use your hands to take it the rest of the way off.
- Set cover aside in a safe location.

Step 2




- Carefully grab battery towards bottom of phone.
- Lift from bottom and take out of phone, set aside in a safe location.

Step 3 — Logic Board




- Unscrew four corner screws with T6 screwdriver.
- Note: The two top screws are short and silver. The two bottom screws are black and long.

Step 4

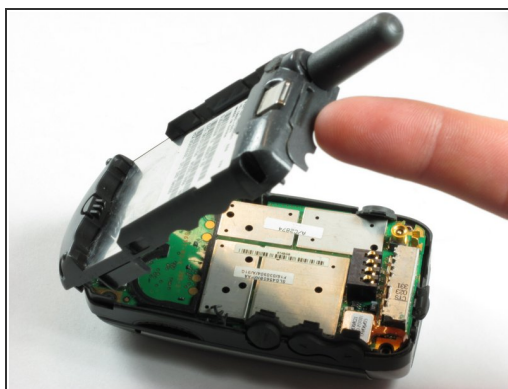


- Use a spudger to gently pry off back chassis. Wedge the spudger in crevice between back panel and phone and lift.

Step 5

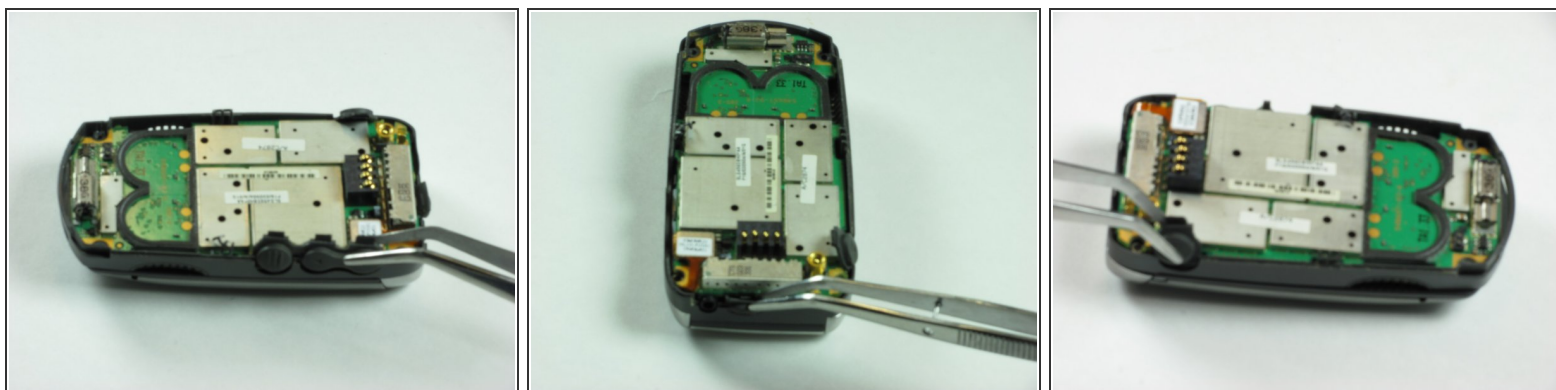



- Starting from left side of phone, remove side buttons and place aside.
- Note: There should be three buttons. One on each side, and the top.
- Return phone to starting orientation when done.

Step 6

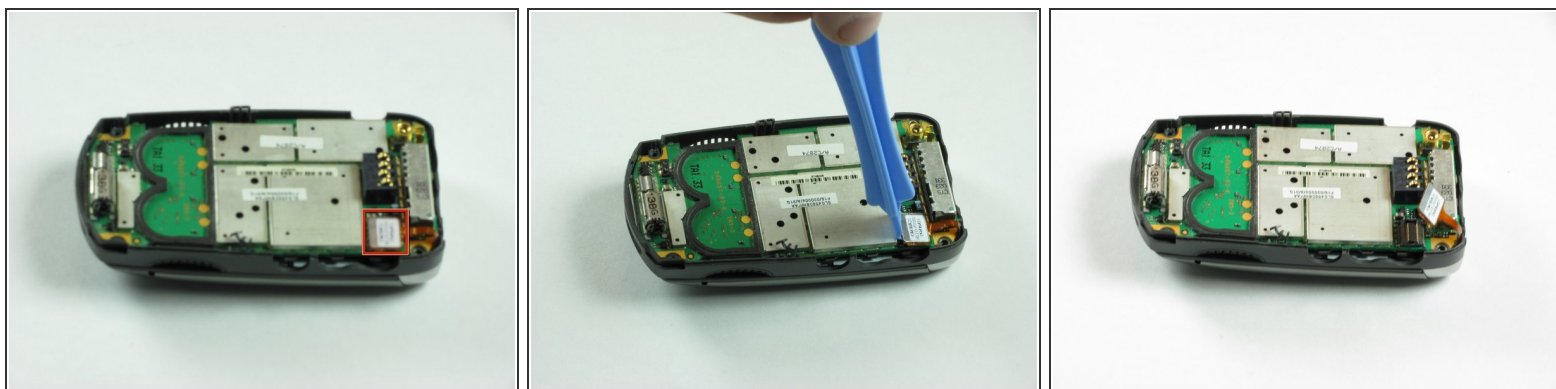

- Gently remove orange ribbon cable by prying up with spudger.

Step 7

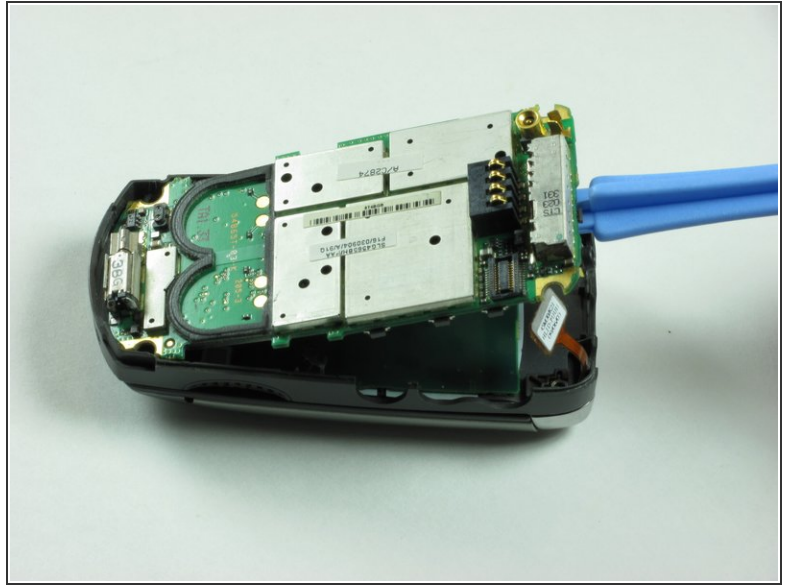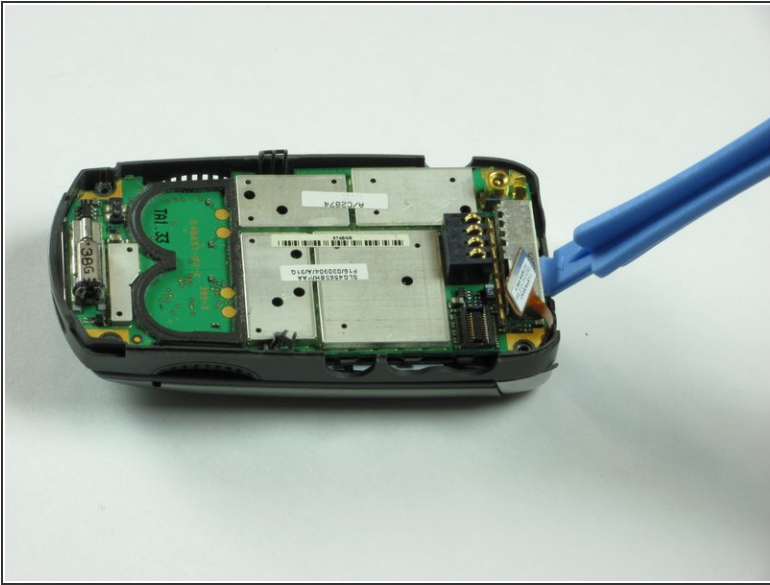

- Use a spudger to pry up logic board by wedging in between logic board and chassis and lifting.
- Note: Orange ribbon cable is fragile and can be broken.

To reassemble your device, follow these instructions in reverse order.