



# LG T310 Teardown

This guide will walk through the steps of tearing down the LG T310 phone.

Written By: Andrew



---

 **TOOLS:**

- [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — LG T310 Teardown



- Slide back cover down with hand in the direction of the arrow on the cover
- Gently remove back cover
- Remove the battery by inserting the plastic opening tool into the groove and gently prying it out

## Step 2




- Remove all of the screws on the back of the phone using a Phillips head screw driver
- Slide out the SIM card from the phone

### Step 3



- Using the plastic opening tool, pry off the shell of the phone, revealing the motherboard

## Step 4

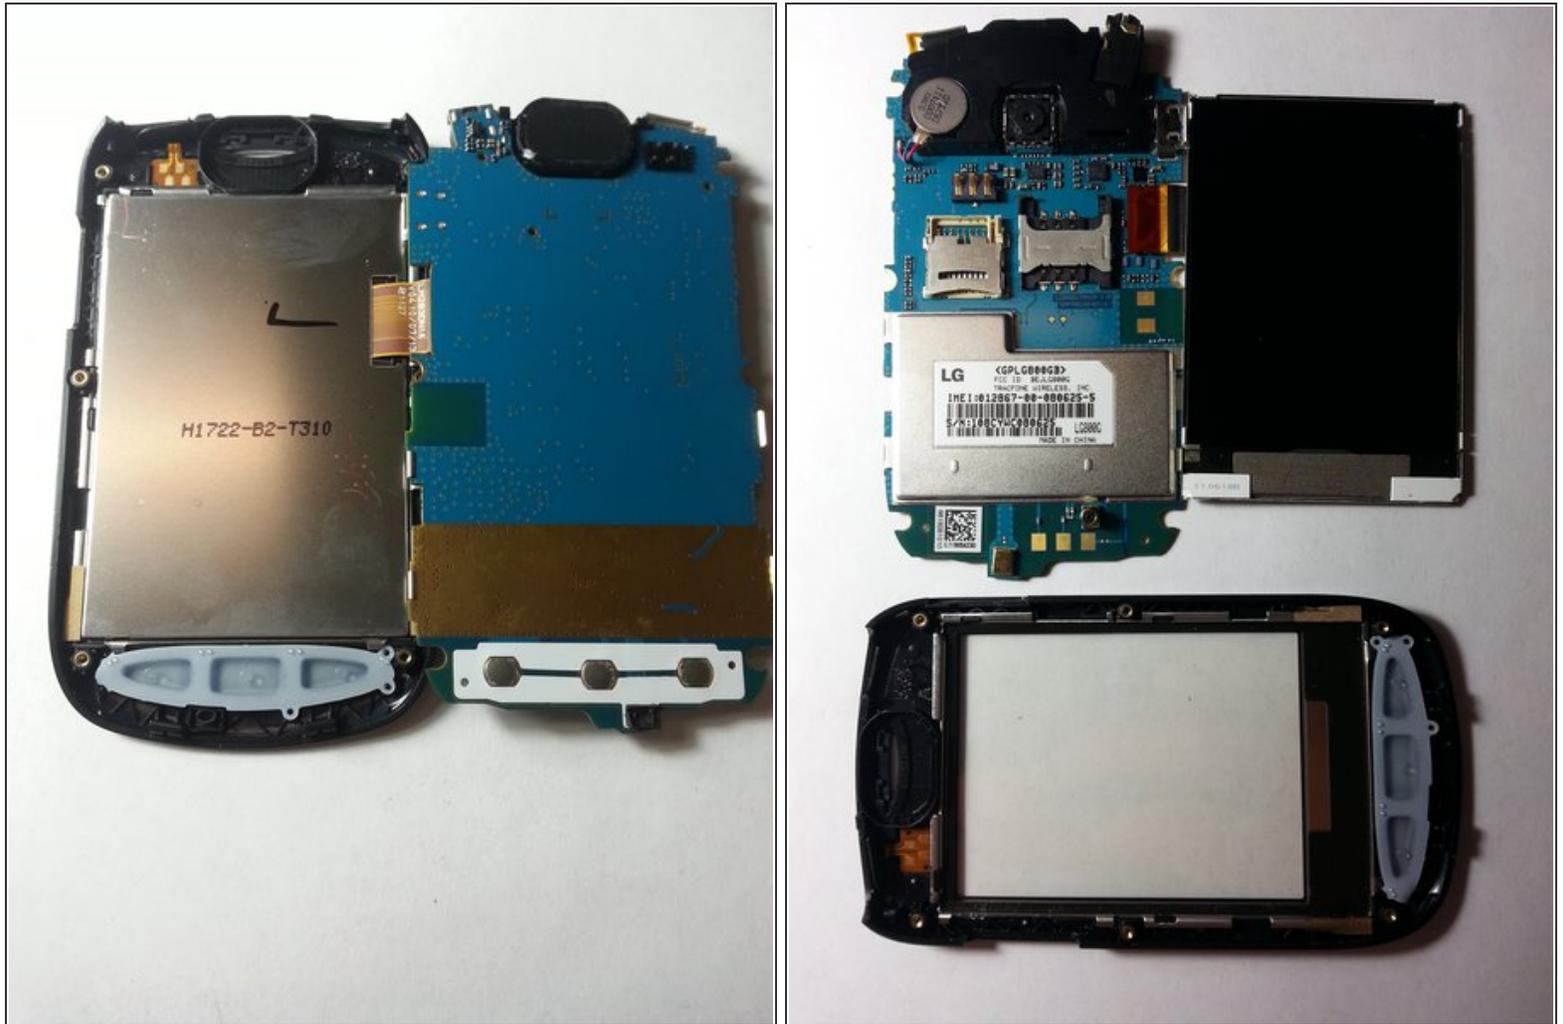

- Using the plastic opening tool, gently pry the motherboard out (while doing this be sure not to pull on the mother board as it is attached to the touch screen)
- Starting at the top left corner of the screen (with phone face down), insert your plastic opening tool and work down the left side.
- The screen should be loose now making it possible to remove it from the case by hand (try not to touch the actual screen, only the side or back).
- This completes the tear down of your LG-T310 Cookie

To reassemble your device, follow these instructions in reverse order.