


# Sony Ericsson Z500a Keypad Replacement

This guide shows how to remove the phone keypad.

Written By: Jory Benitez

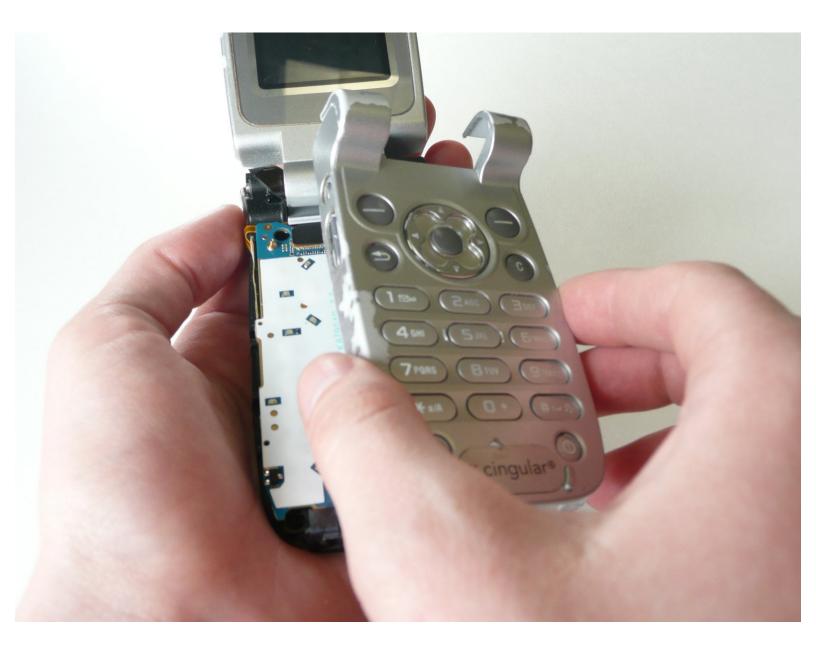

## INTRODUCTION

This guide shows how to remove the phone keypad.

## **TOOLS:**

۶

- T6 Torx Screwdriver (1)
- iFixit Opening Tool (1)

#### Step 1 — Keypad




- Remove the back cover by pulling it down, and then take out the battery.
- Using a T6 Torx screwdriver, remove the 4 screws.
- Keep the phone open with the back cover facing you.

#### Step 2



- Use the plastic opening tool and run it between the case and the body of the device to loosen the keyboard
- *i* There are 2 clamps that lock the keyboard to the case (1 on each side)

### Step 3

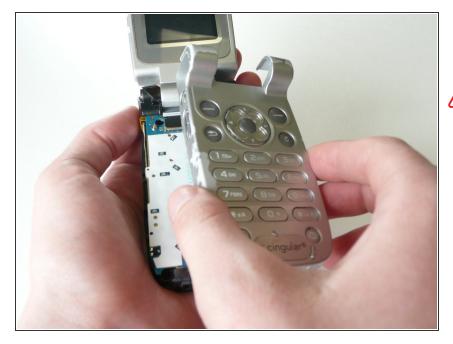

- Flip the phone over and lift straight up on the key pad to remove it.
- Be sure to hold the phone flat (parallel to the table) so that no loose parts fall out.

To reassemble your device, follow these instructions in reverse order.