



# Nokia N900 Teardown

In this guide, we will walk you through...

Written By: Juan Haro



# INTRODUCTION

In this guide, we will walk you through disassembling a Nokia N900 through techniques, tips, and advice.

---

## TOOLS:

[screw driver with interchangeable head](#) (1)

[Opening Tool \(Öffnungswerkzeug\)](#) (4)

*Not required you can do this without them but they help.*

---

## Step 1 — Nokia N900 Teardown



- First, flip the phone so the back is facing upwards.

## Step 2




- Next, locate the slit on the side of the phone and remove the back cover.

## Step 3



- Once the back has been removed, take out the battery.

## Step 4

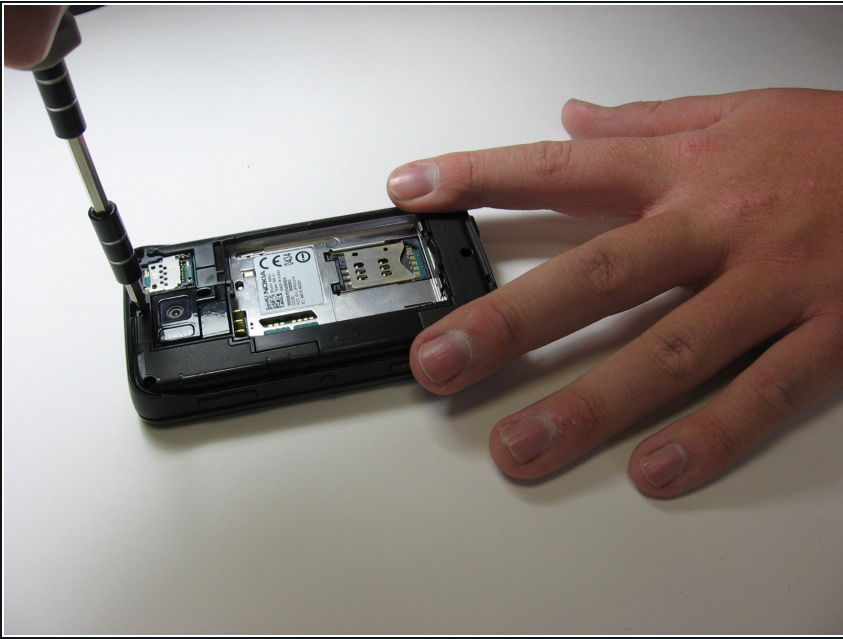


- Using a small bit screwdriver, unscrew all six screws located in the back of the phone. If necessary, iFixit has 16 to 112 Bit Driver kits available for purchase.

## Step 5



- Once all six screws have been removed, gently pull the phone apart. You should now be left with two pieces.

## Step 6

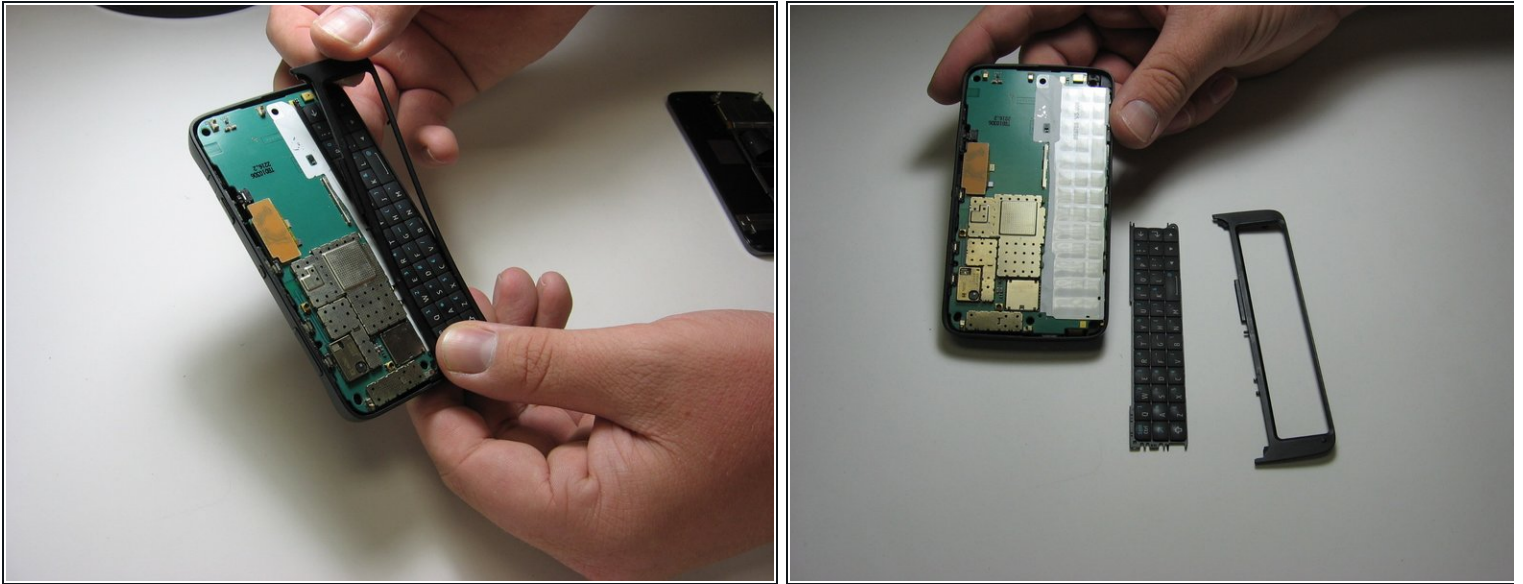


- Taking the back of the phone, remove the qwerty key mat. It should come off easily.

## Step 7



- Using the blue opening tool, pry out the green motherboard.

## Step 8

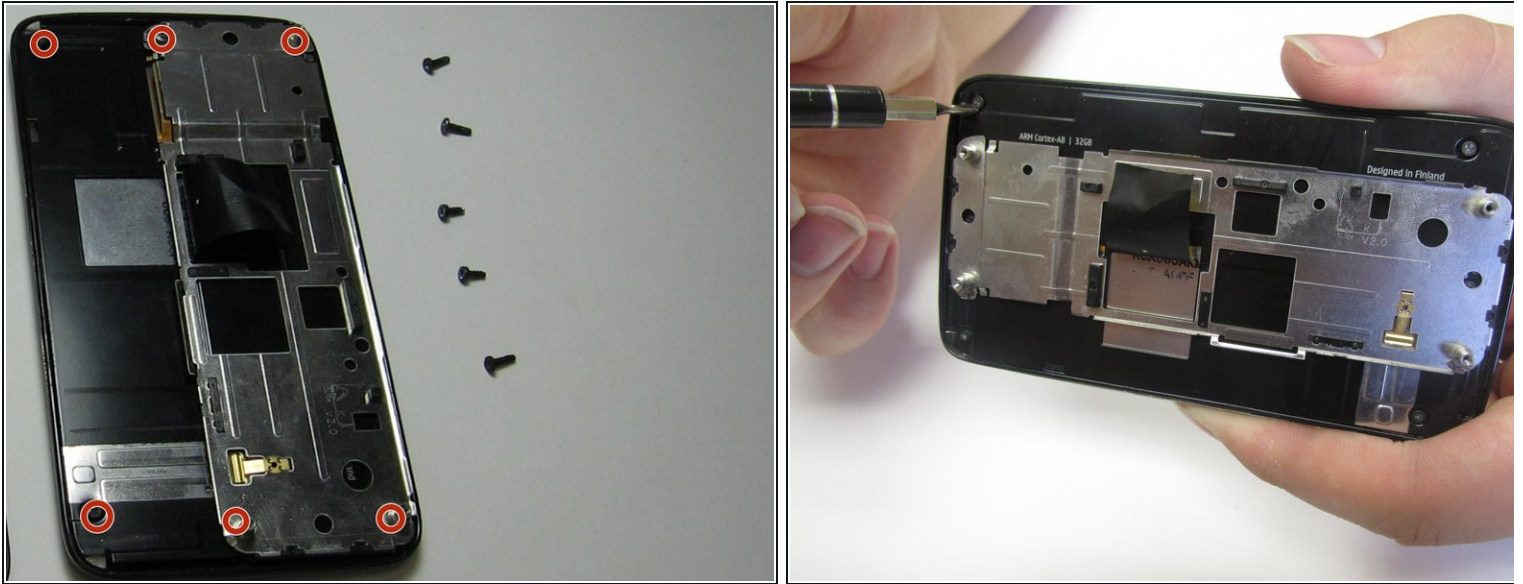


- Now, take the front half of the phone. Use the screwdriver to remove all six screws.

## Step 9



- Once pulled apart, you should be left with two pieces.

## Step 10

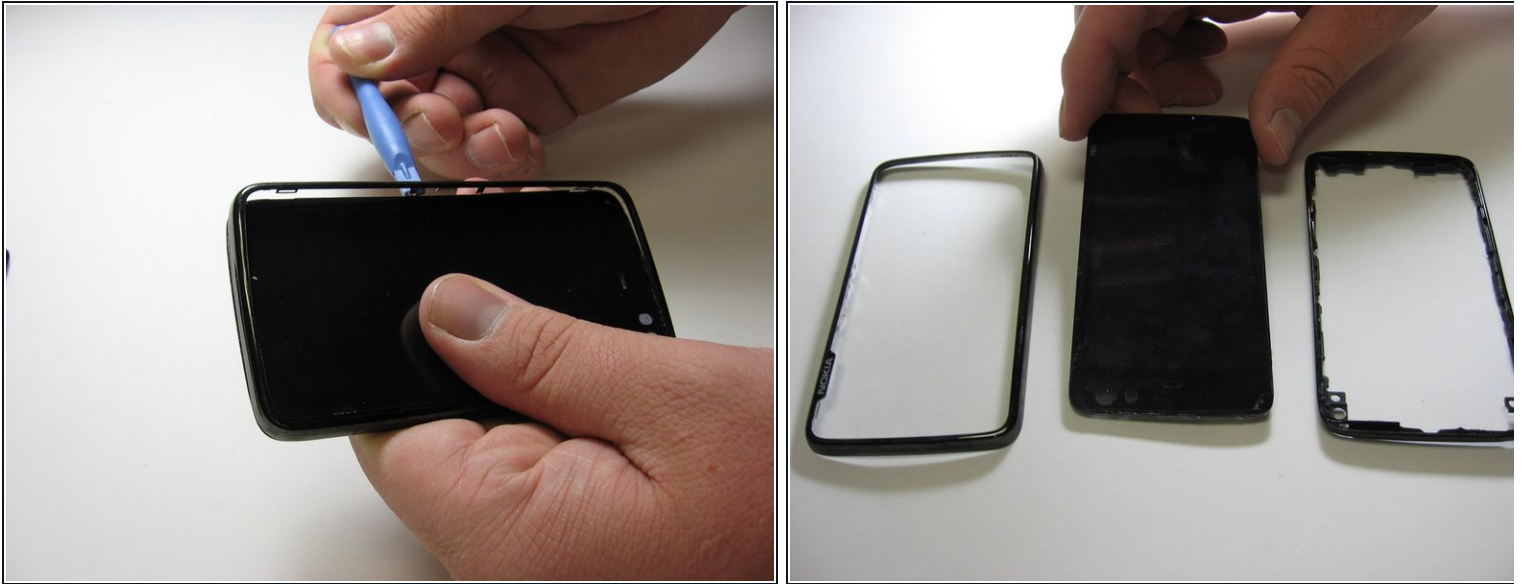

- With the touch screen now removed from the keyboard slider, use the blue, plastic opening tool to remove the cover of the screen.
- It is highly advised to take off one side at a time.
- Once one section of the cover has been removed, the second cover will be removable. You have officially completed tearing down a Nokia N900.

To reassemble your device, follow these instructions in reverse order.