



HTC Flyer Back Cover Replacement

This guide shows you how to remove and replace the back cover of your HTC Flyer.

Written By: Justin Funk



INTRODUCTION


Do you need to access the inner components of your device? Consider using this guide to remove the back cover of your device.



TOOLS:

- [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Cover

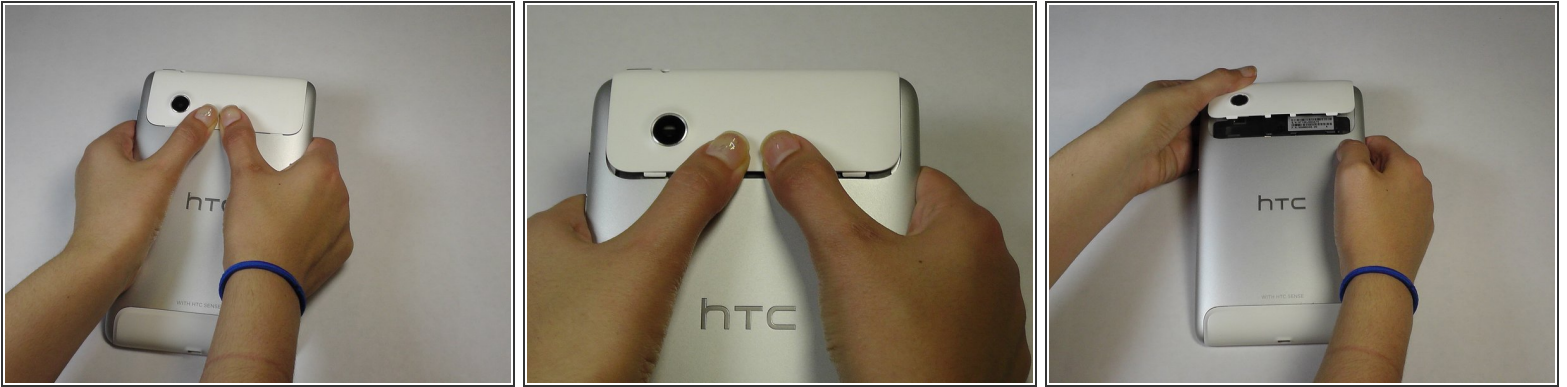

- Apply pressure along the bottom of the white panel containing the camera and push upwards.

i It may take some effort, but it will smoothly slide off.


Step 2



- Unscrew the four of 3.5mm Torx T5 screws that run along the sides of the exposed innards.



i All screws in the device will use the Torx T5 screwdriver, so keep it handy.

Step 3

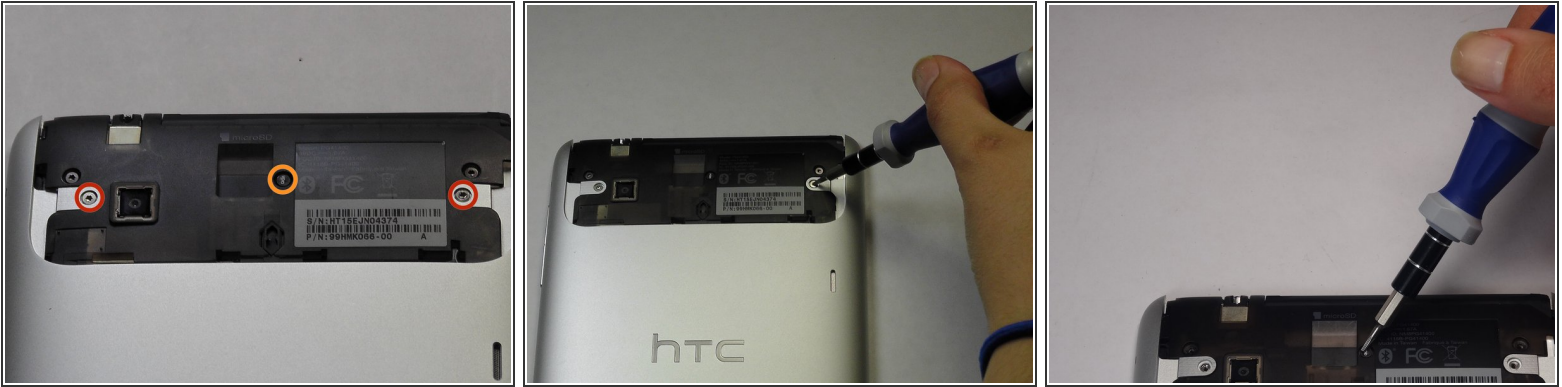

- Remove the black protective piece of plastic by sliding it upwards.
- Remove the two 3.5mm Torx #5 screws holding the protective plastic down on along the sides.
- ⚠ A center 3.5mm Torx screw will be covered by "VOID" sticker.
- Either remove the sticker or jam the screwdriver into the screw, and remove the screw.
- Remove the protective panel by sliding it upwards.

Step 4

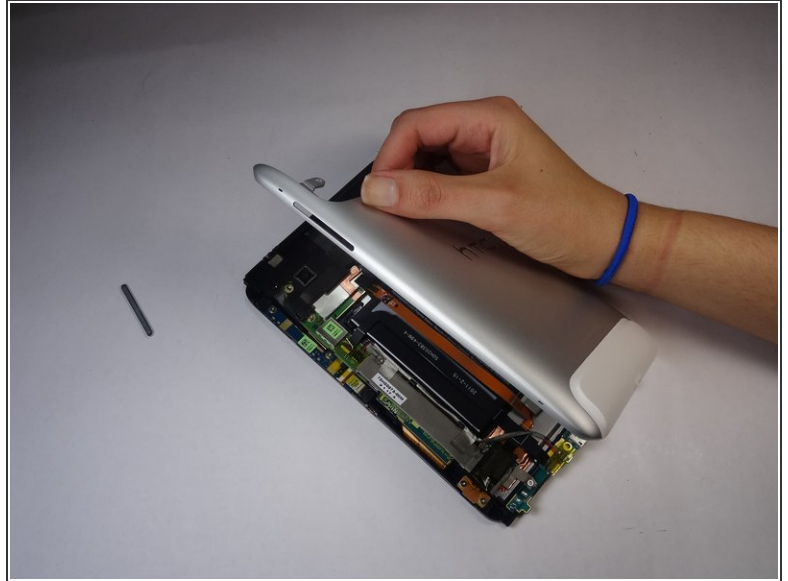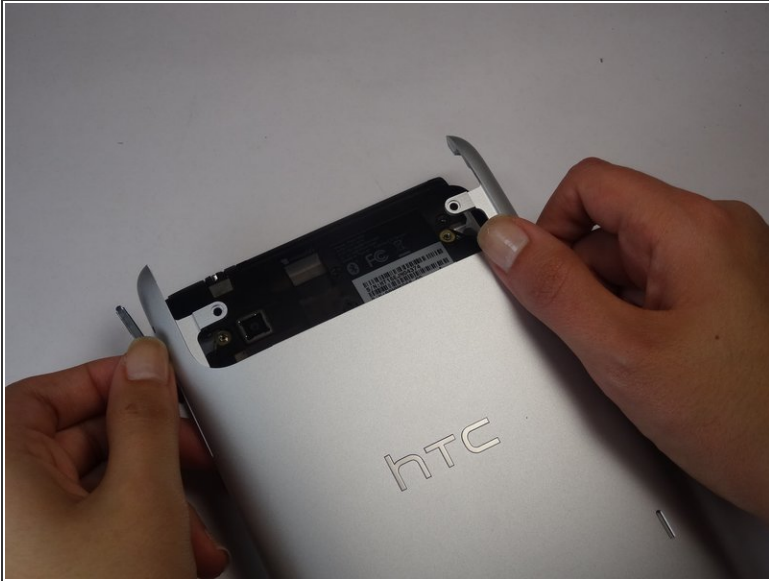

- Before removing the back cover, apply some scotch tape to the volume buttons to prevent them from falling out of the back panel.
- Use a plastic opening tool to lever up the top half of the cover.
- Lift the back panel up and remove it from the device.

To reassemble your device, follow these instructions in reverse order.