




Samsung Gusto 2 Camera Replacement

This guide will explain the steps for removing the phone's camera in order to replace it.

Written By: Marc Carreira

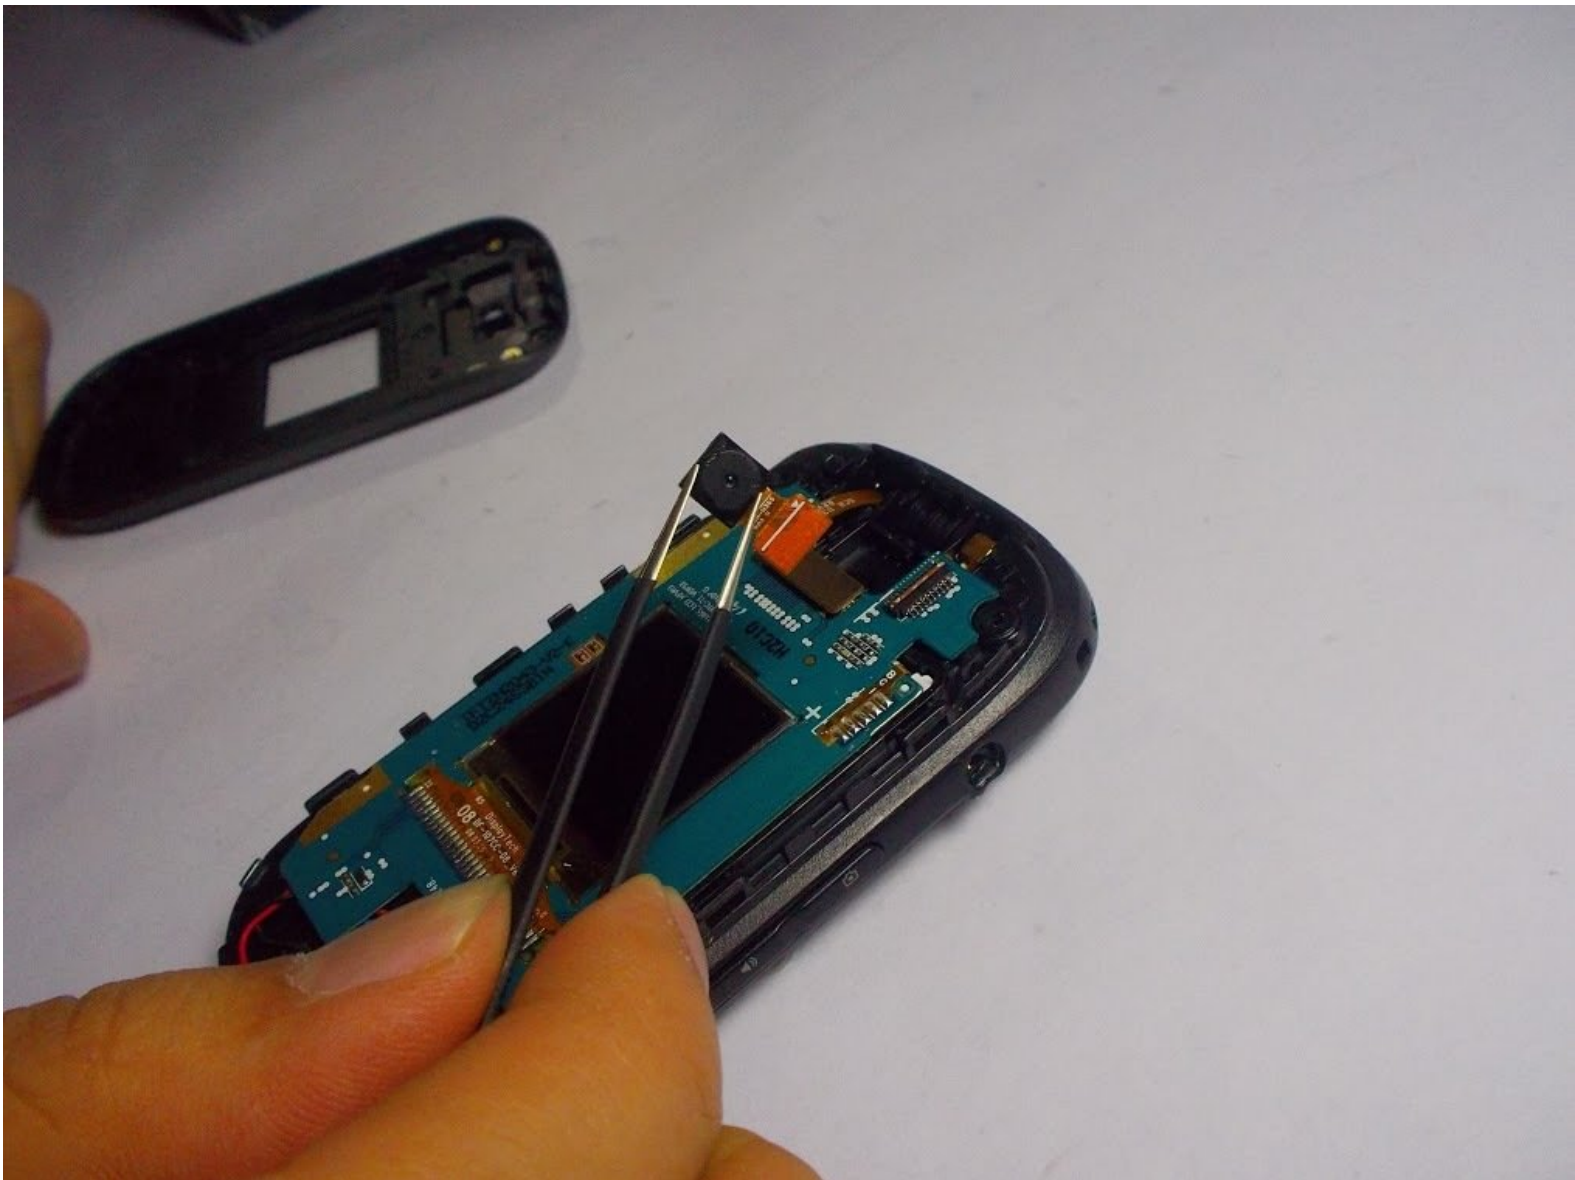



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Camera



- Flip open the phone and place it flat as shown.

Step 2




- Remove the two screws near the front screen.

Step 3




- Use a spudger to remove the front cover of the phone.
- Insert the spudger as shown and move slowly around the length of the edge to remove the cover.
- Then, close the phone so that the front is showing.

Step 4

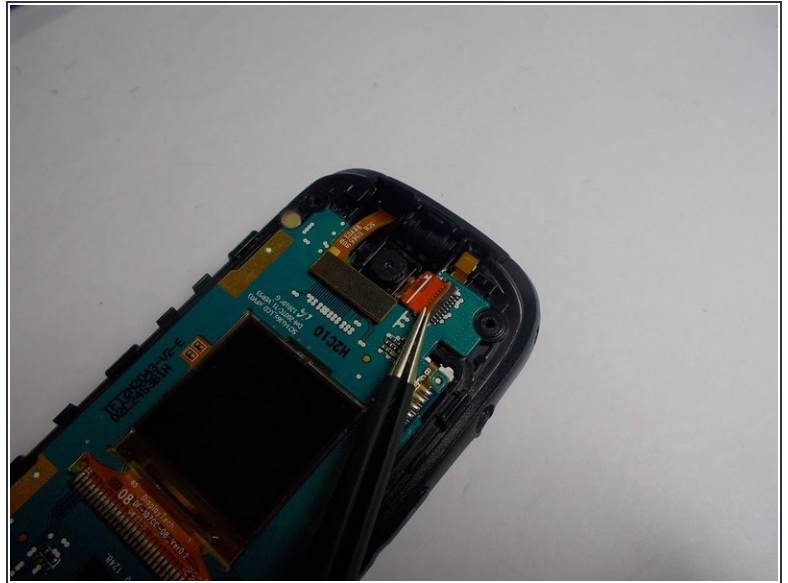

- Look at the first image to identify the location of the camera.
- Use tweezers to remove the orange flap keeping the camera in place.

Step 5

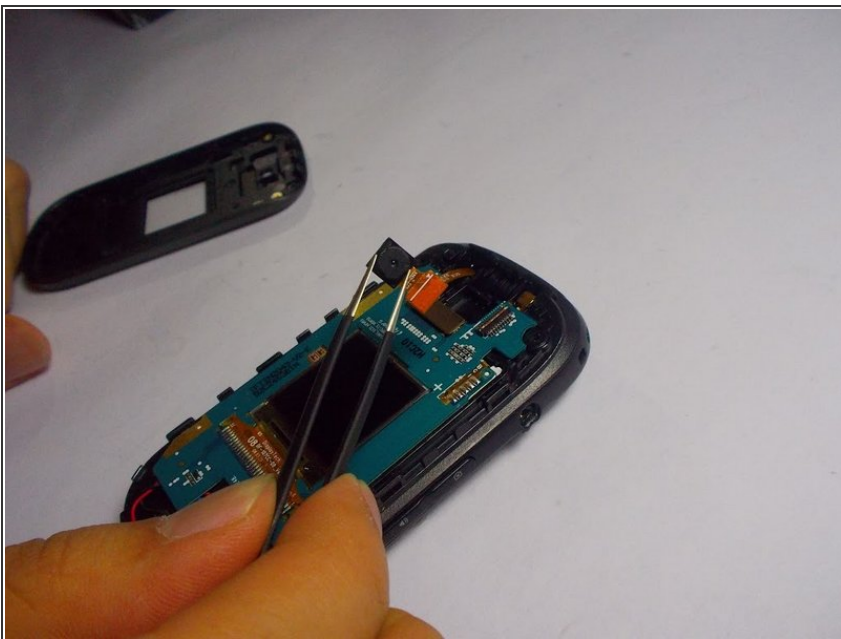

- Use tweezers to gently remove the camera.

To reassemble your device, follow these instructions in reverse order.