



# Motorola Droid RAZR HD Front Panel Assembly Replacement

Replace the entire front panel assembly.

Written By: Brendan Baronia



---

## INTRODUCTION

Use this guide to replace the entire front panel assembly on your Motorola Droid RAZR HD. This includes the



### TOOLS:


- [iFixit Opening Tools](#) (1)
  - [T4 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Front Panel Assembly



- ⚠ Power off the device before disassembly to avoid damage or harm from electrical surges.
- Remove the two 4.5mm screws in the bottom left and right corners of the device using a T4 Torx Screwdriver.

## Step 2

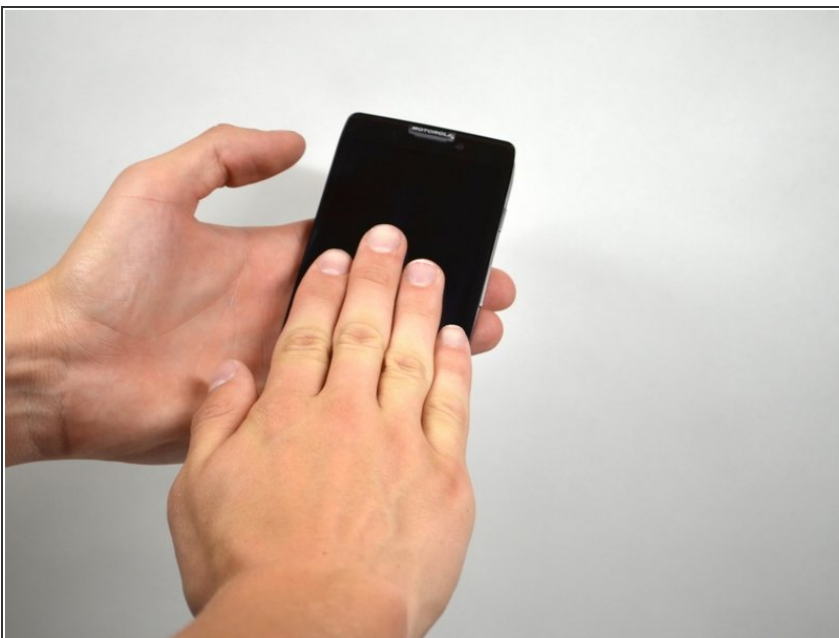


- Holding the device in your hand, push the screen towards the top of the phone until it disconnects from the base of the phone.

### Step 3




- Use a plastic opening tool to lift the screen from the phone.
- ⚠ Do not try to completely detach the screen; cables are still connected to the device and can be damaged.

### Step 4

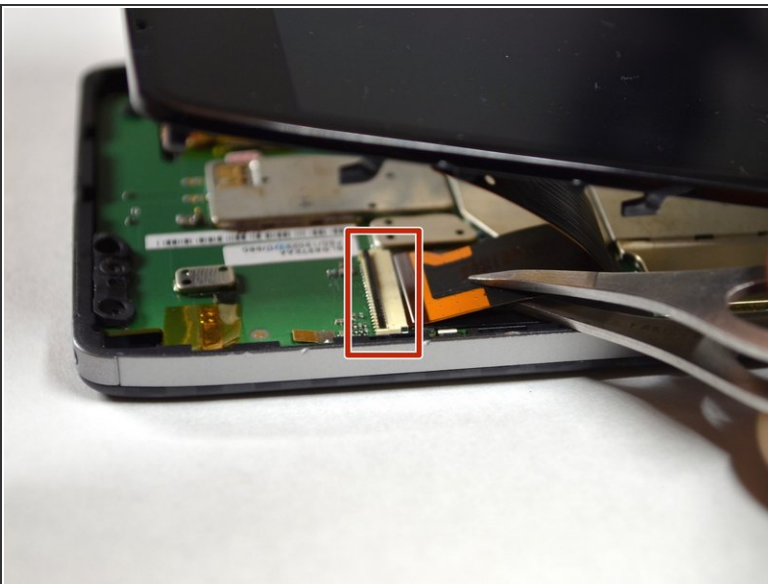

- Use tweezers to remove the yellow tape covering the lcd/digitizer cable connector.
- Carefully lift up the black locking tab to release the lcd/digitizer cable.
- ⓘ The cable connector is located on the bottom right section of the phone.

## Step 5

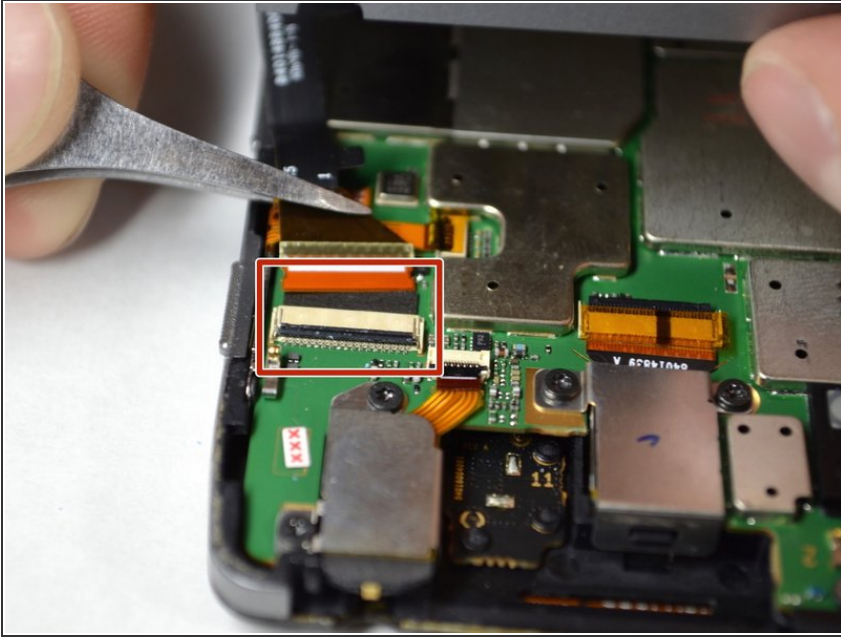

- Lift up the screen further to reveal another cable at the top of the device connecting the motherboard to the screen.
- ⓘ This connector is located on the top right section of the phone.
- Use tweezers to lift the black bar on top of the ZIF connector.
  - Pull the ribbon cable out of the connector with tweezers.
- Now that there are no cables connecting the screen to the motherboard, remove the screen.

To reassemble your device, follow these instructions in reverse order.