



Dell Streak Display Replacement

This Guide will help you to repair your broken Display.

Written By: Fix my problems myself



INTRODUCTION

First read the Teardown from ifixit.com for the [Dell Streak Phone](#)

TOOLS:


- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
-

Step 1 — Display



- Loosen any clamps that hold the LCD screen in place. Some of the clamps may not be loosened yet, leave them attached for now.

Step 2

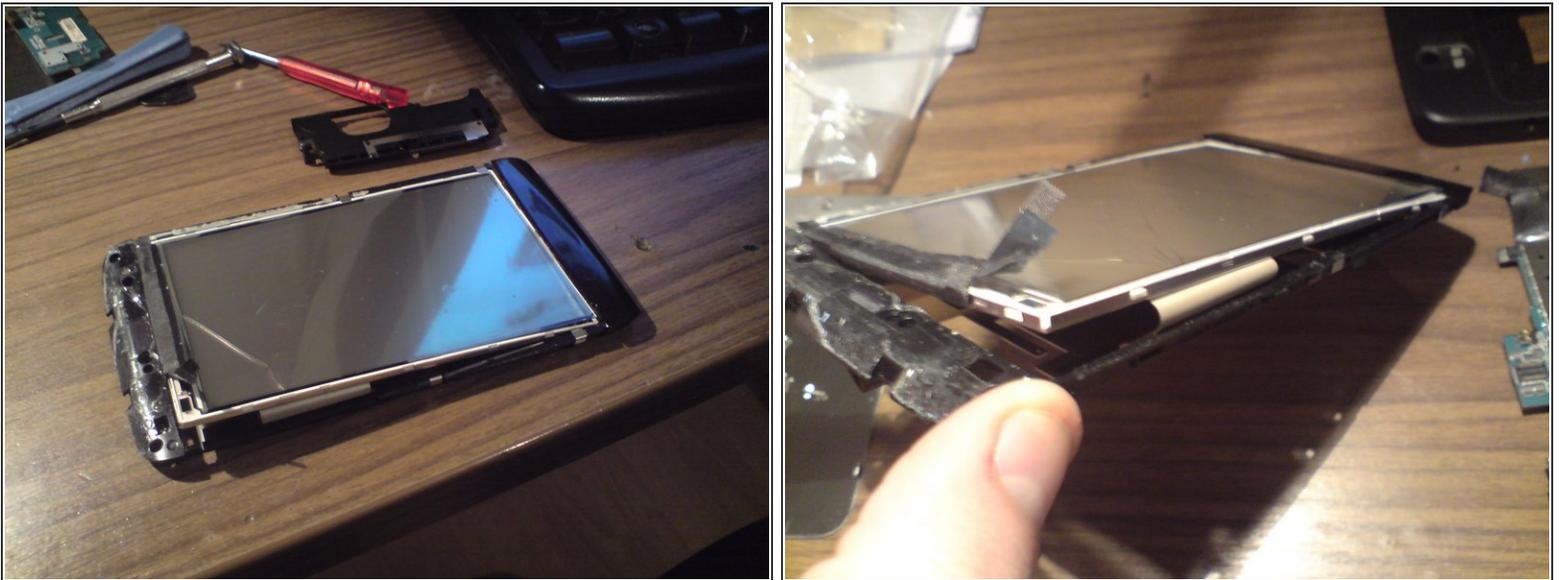

- The gorilla glass is pinned to the case. You must take a slotted screwdriver to go around the case and separate the gorilla glass from the case.
- In some instances the gorilla glass may separate from the LCD fairly easily, or it may be hard to release.
- (Don't feel sorry for the broken display, it doesn't deserve to be treated gently..)

Step 3




- Lift the new display out of the case. You should fold the LCD ribbon cable to do this.

Step 4





- Really good, the display is out of the case.
- Remember the lifted display is no longer for use. For example, i brought the touchscreen ribbon cable even though i was careful.

Step 5

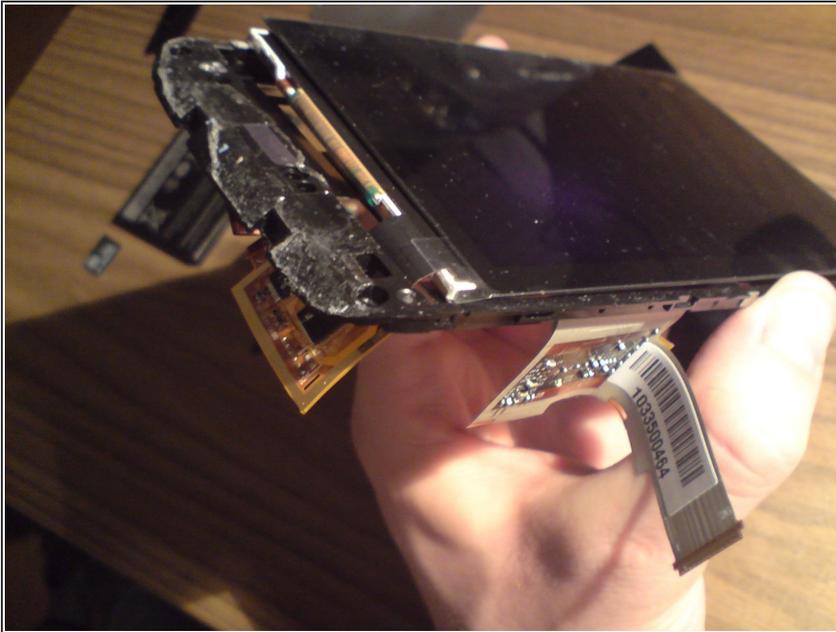

- Insert the brand new display!
Remind, you must do step 3 to 2 in reversed direction. The hardest part for me was to fold the LCD ribbon cable of the new display, but don't be shy, do it!
- Reassemble your Phone

Step 6

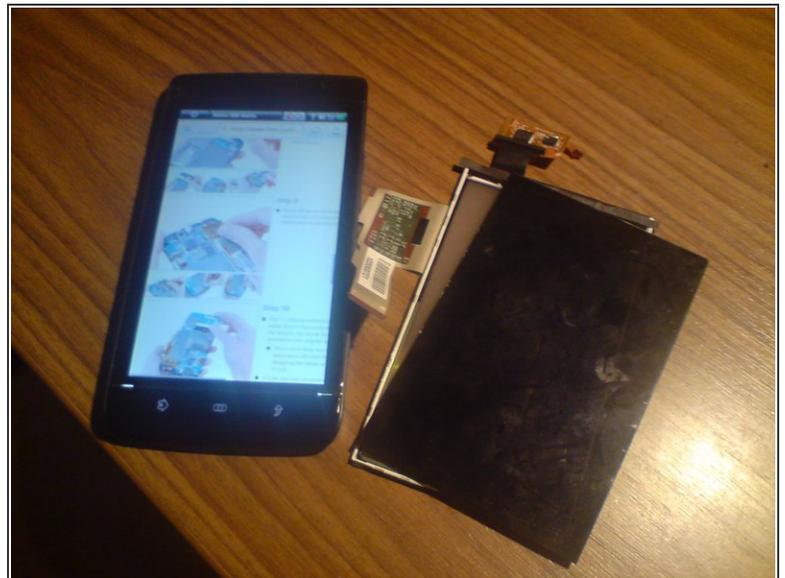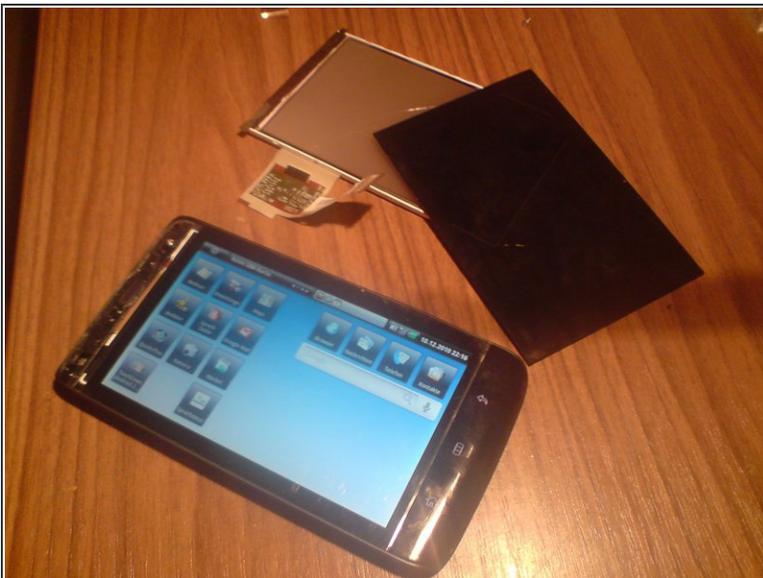

- Perfect, it's done!
- Don't be alarmed if the screen is black when you re-start your phone for the first time and the buttons are only glowing. This may happen, but removing and reinserting the battery should restart it and cause it to function properly!

To reassemble your device, follow these instructions in reverse order.