



VTech Little Apps Tablet Speaker Replacement

Replace your speaker with a new one! (requires soldering)

Written By: Johnnie Cairns



INTRODUCTION

This guide will help with replacing the speaker located inside of your device. This guide will require soldering.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [Soldering Iron](#) (1)
 - [Solder](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Remove the 9.9 mm screw covering the batteries with a PH1 driver head.

Step 2



- Use a plastic opening tool to pry the batteries out of their holding.
- ☑ If replacing your batteries with new ones, be careful to insert them as indicated on the device.

Step 3 — Back Cover



- Position the VTech Little Apps Tablet face-down on a flat surface so that you can clearly see the back of the device.
- Remove all seven 9.6 mm screws located around the perimeter of the back cover with a PH1 driver head.


Step 4




- Gently remove the back cover then flip it 180 degrees so that the back cover of the device is now face-down.


⚠ Proceed with caution as there are wires attaching the back cover to the front cover of the device that could be easily detached.

Step 5 — Speaker

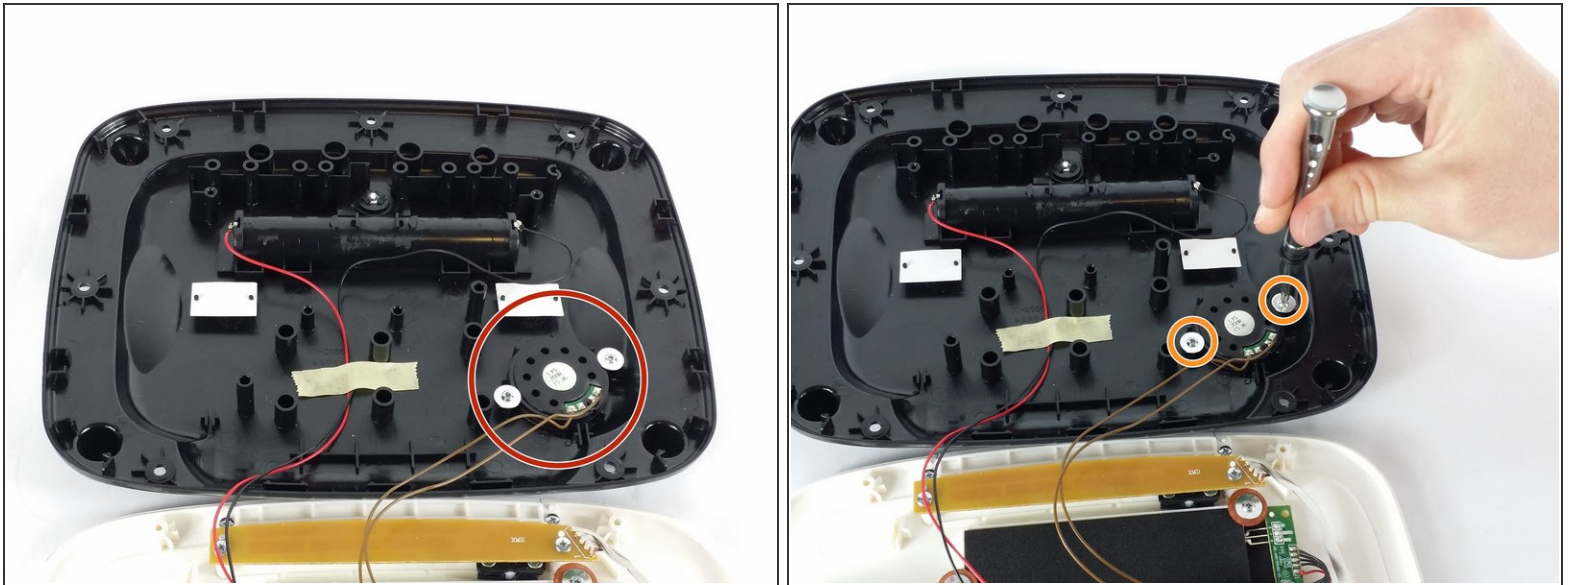


 The speaker should be located at the bottom-right side of the back cover from your perspective.

- Remove the two 7.3 mm panhead screws holding down the speaker with a PH0 driver head.

 Be careful not to disturb the wires while removing the screws.

Step 6

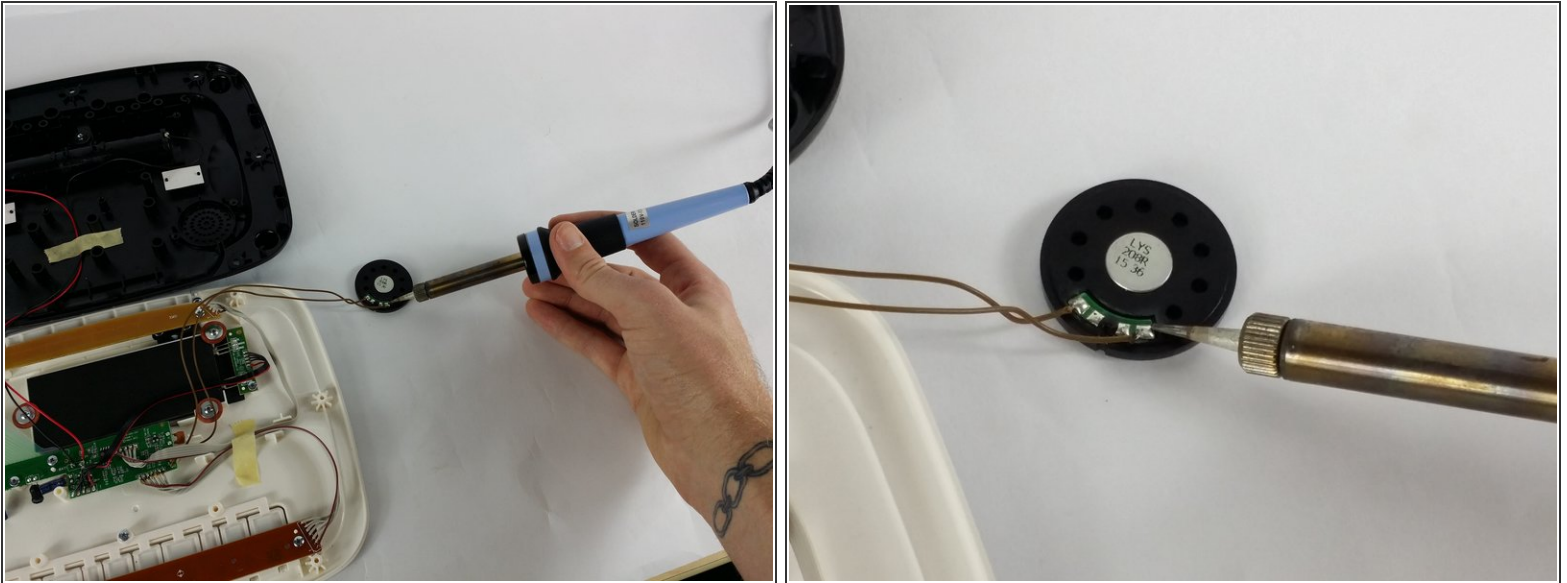

- Remove the speaker from its holding and place it to the side of the device.
- Desolder the brown wires from the speaker connections.
- ⓘ Soldering is the most difficult step in this guide. If you are in need of assistance with this step, refer to this [Soldering Guide](#).

To reassemble your device, follow these instructions in reverse order.