




# HTC Wizard 200 Vibrator Replacement

Takes you through the steps to install the...

Written By: Kyle Champ

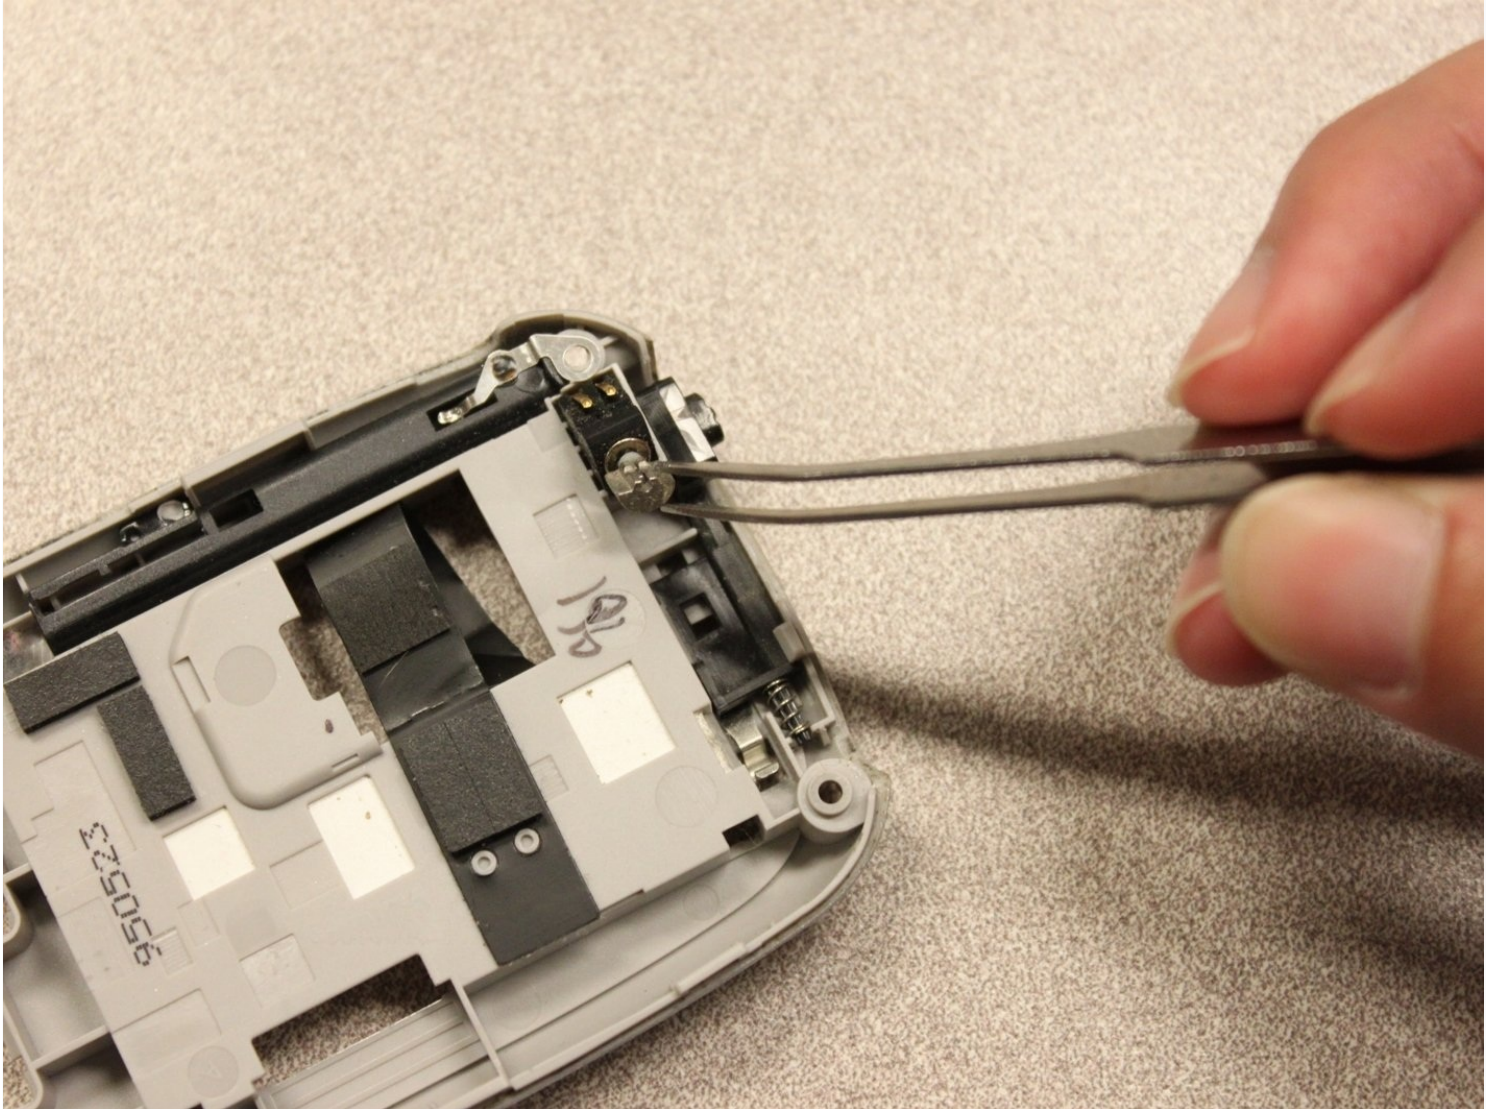

# INTRODUCTION

Takes you through the steps to install the vibrator.

## TOOLS:

[iFixit Opening Tool](#) (1)

[Spudger](#) (1)

[T5 Torx Screwdriver](#) (1)

## Step 1 — Battery



- To expose the battery, remove the outer case with your fingernail.
- Remove the battery by pulling the black tab.



## Step 2 — Back Panel




- Insert the flat end of the [spudger](#) into the two notches on the back of the camera cover and pry them up.

## Step 3



- Work the [spudger](#) around the edges of the camera cover until it comes off.


## Step 4

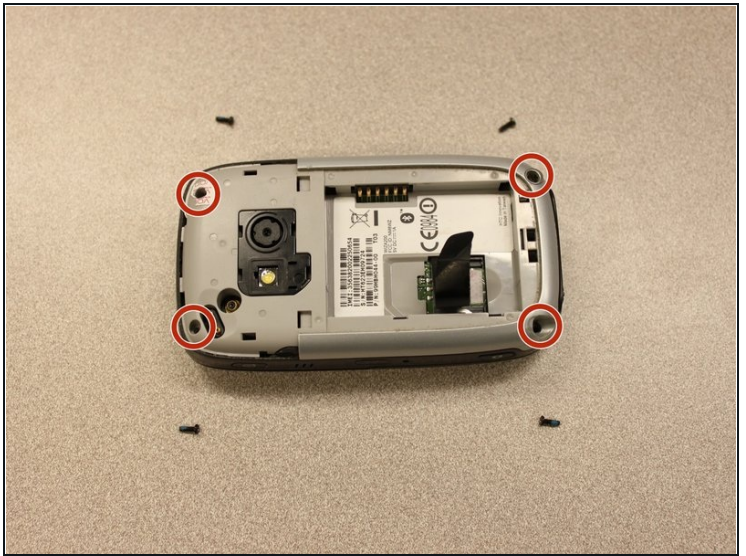

- Remove the four 6 mm screws with the [T5 Torx screwdriver](#).

ⓘ One of the screws is under the "void" sticker.


## Step 5

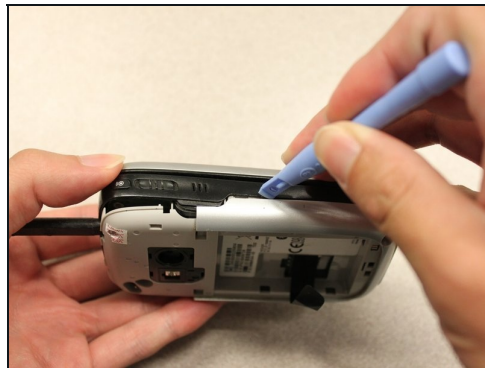

- Insert the flat end of an iFixit opening tool between the side and inner covers to create a gap.
- Work the tool around the edges until all the clips release.




## Step 6

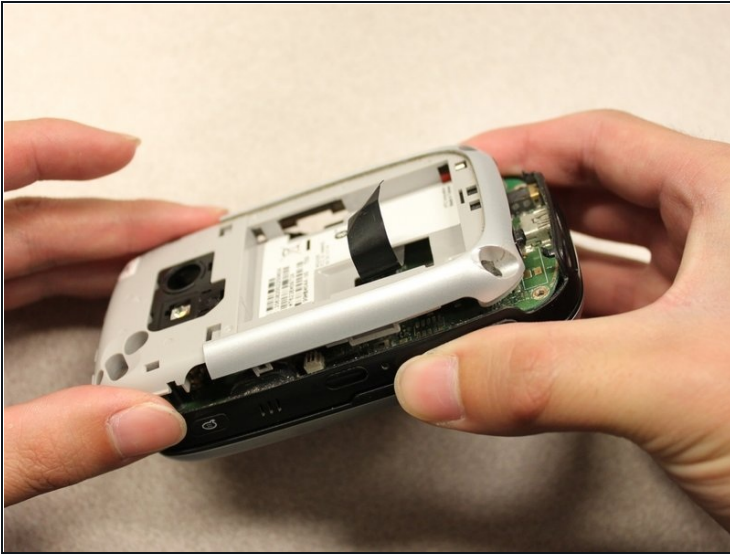

- Once all the clips are open, remove the inner panel from the phone.

## Step 7 — Vibrator

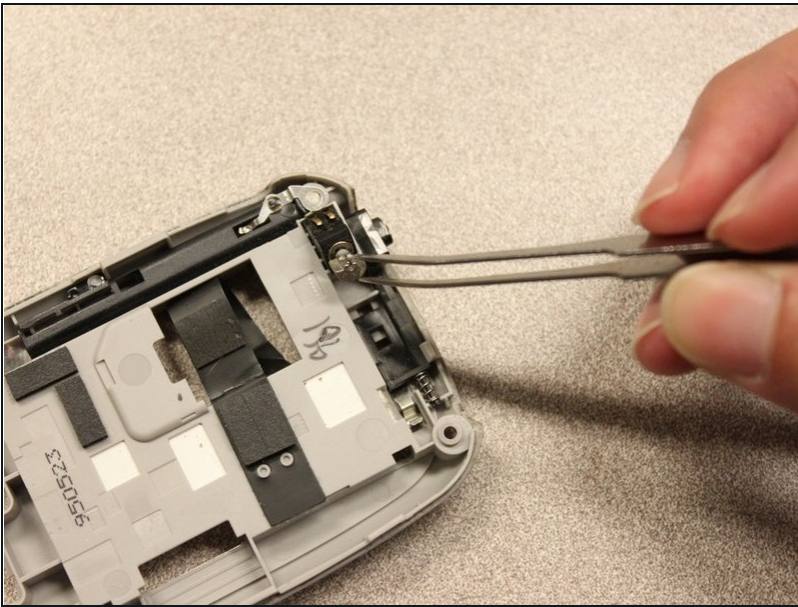

- Use the [tweezers](#) to remove the vibrator module.

---

To reassemble your device, follow these instructions in reverse order.