



# NABI XD Screen Replacement

This guide is for replacing the screen for the NABI XD.

Written By: Marissa Schiereck



---

## INTRODUCTION


Is the screen cracked or non responsive then replacing it will fix the NABI XD.

---

### TOOLS:


- [Tweezers](#) (1)
  - [Spudger](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Rear panel

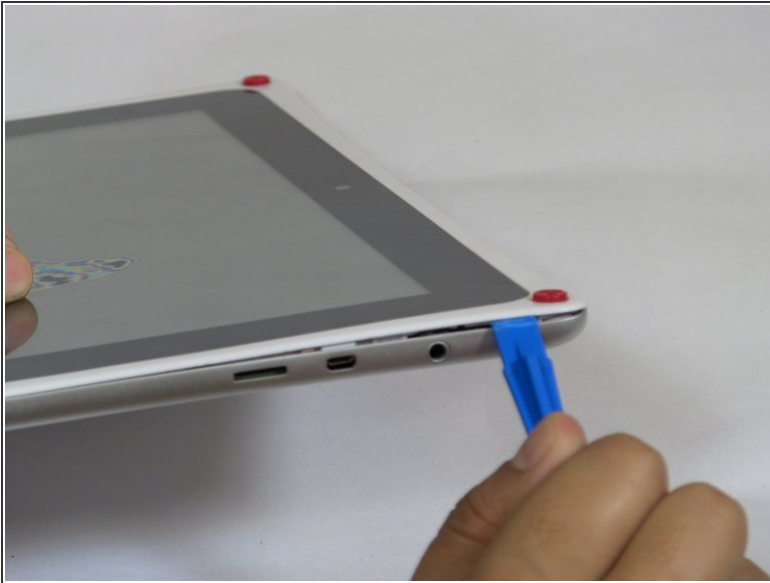

- Use the plastic opening tool at the top left corner seam, then pry the corner apart.


## Step 2

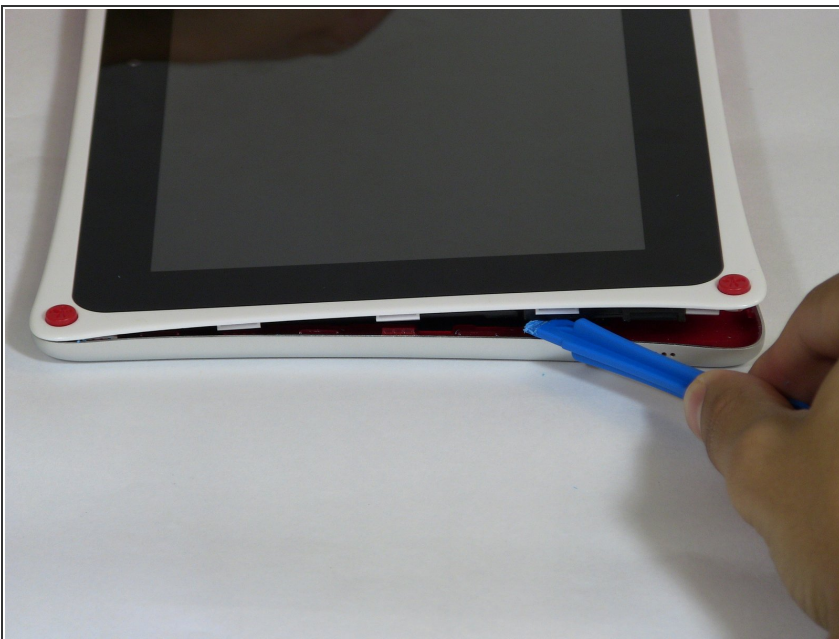

- Next slide the plastic opening tool across the sides of the Nabi. It will slowly open.
- There are small plastic clips that need to be release. Gently apply outwards pressure until the clips give.
- Go around the NABI XD and separate the rear panel from the device.



## Step 3 — Battery

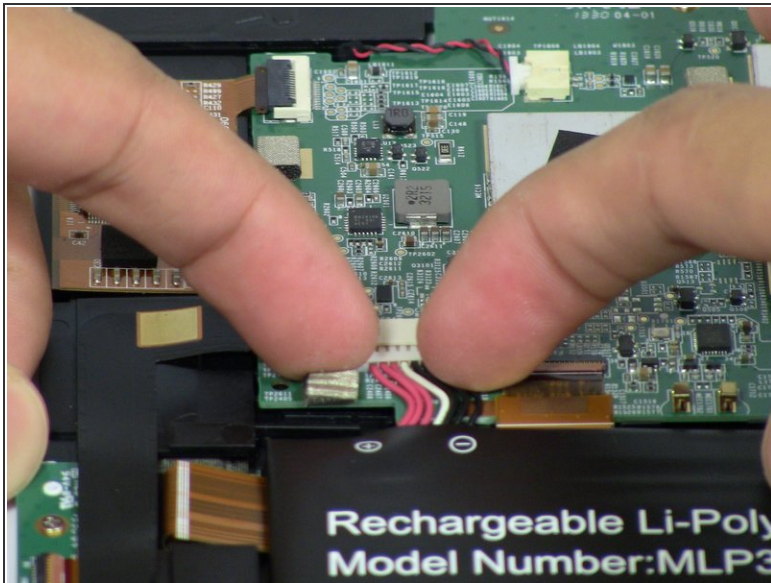



- Place your fingernails on both sides of the connector and pull it straight back away from the holder.

## Step 4




- ❗ Battery is glued to the base, lift carefully.
- To remove battery, lift the battery up from the motherboard.

## Step 5 — Charging port

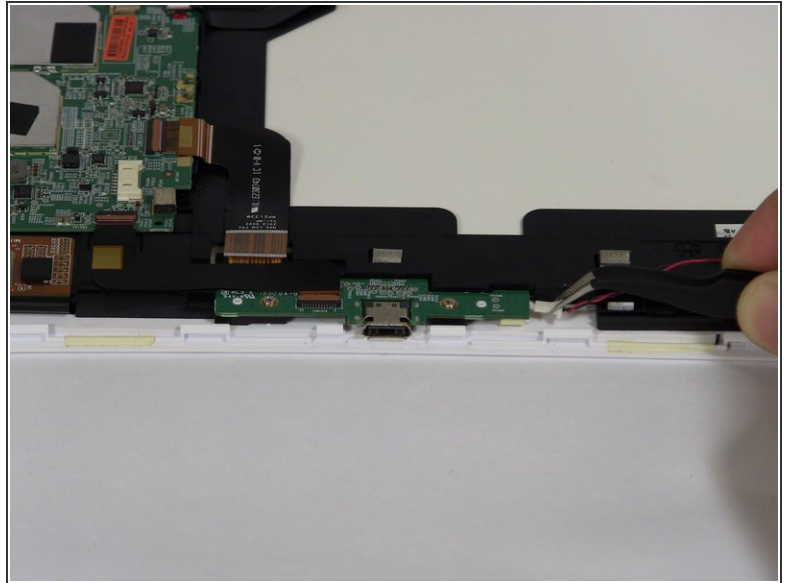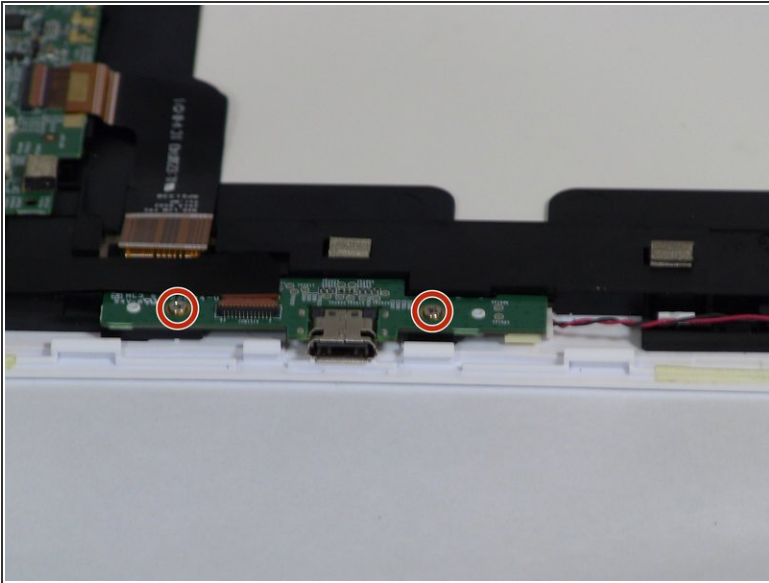

- Remove the two 4mm Phillips screws with the PH#0 screwdriver.
- Disconnect the left (L) speaker wire from the charging port by grabbing it on both sides with the tweezers and pulling straight back.


## Step 6

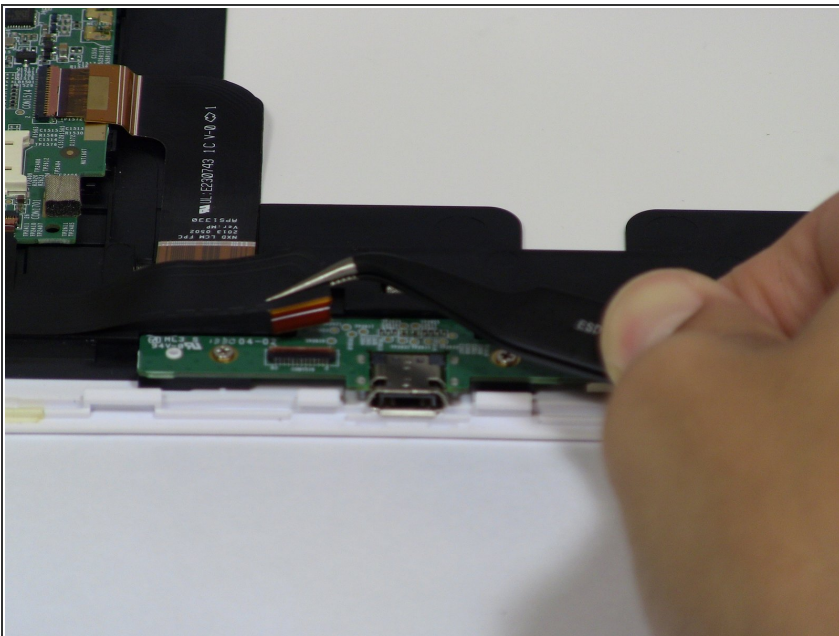

- Use your fingernails or a spudger to flip up the small retaining flap, then pull the ribbon straight back to remove
- Lift the charging port from the NABI XD.




## Step 7 — Motherboard

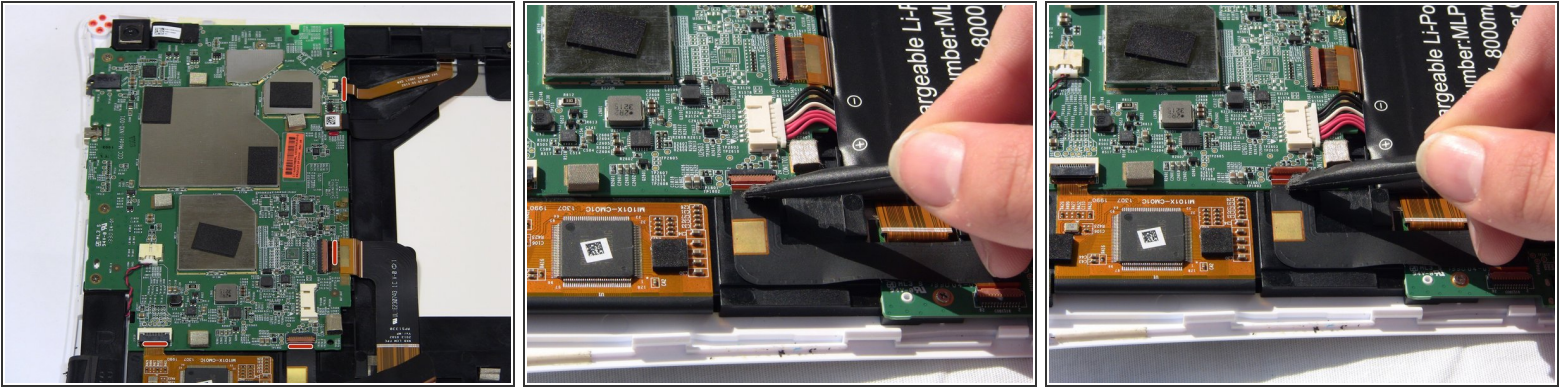



- To remove the marked ribbons, use your fingernails or a spudger to lift up small tab
  - Use the Precision Tweezers to gently pull the ribbons straight out of the connectors.
- i** You need to remove 4 ribbons

## Step 8

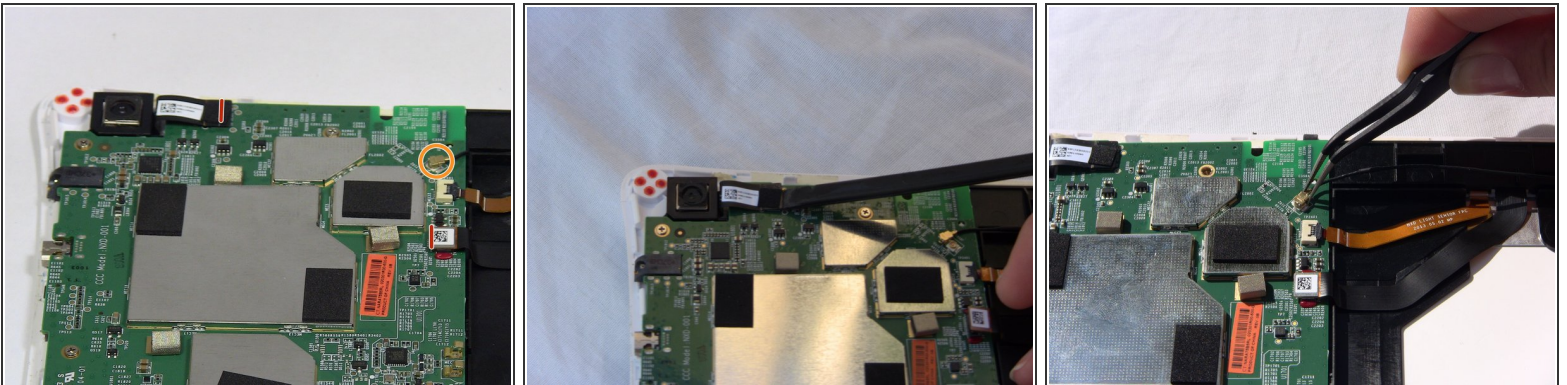


- Disconnect the camera by lifting the ribbon straight up. Also disconnect the remaining ribbon by lifting up gently.
- To disconnect antenna wire, use the tweezers to pry connector straight from the board.

## Step 9

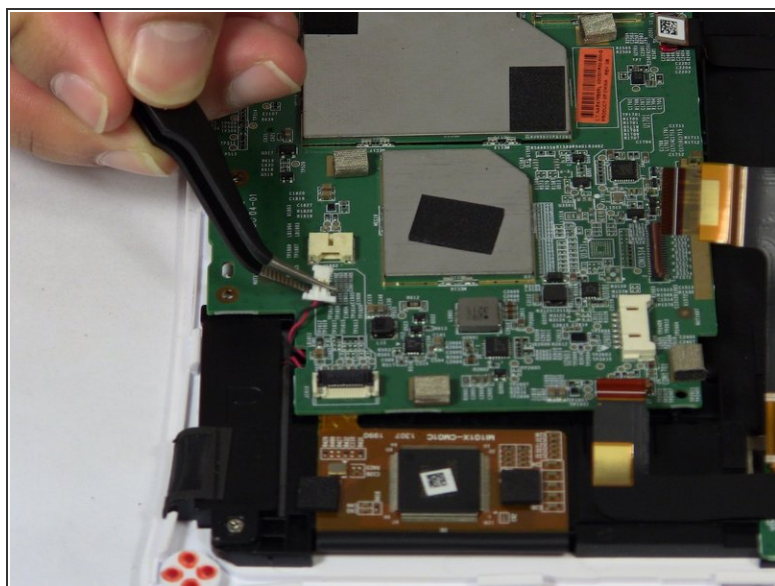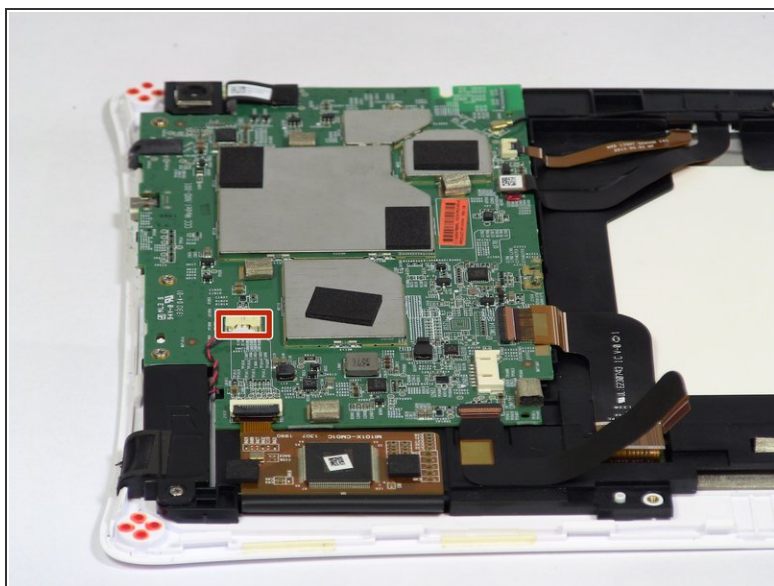

- Disconnect the Right speaker by grabbing the wire head by its sides and pulling it back from the connector.


## Step 10

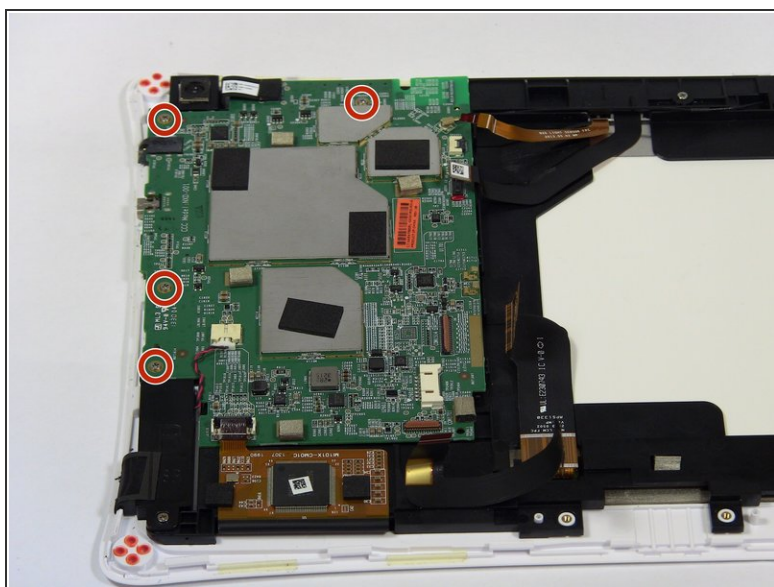

- Remove the four 4mm Phillips screws with the PH#0 screwdriver.






## Step 11

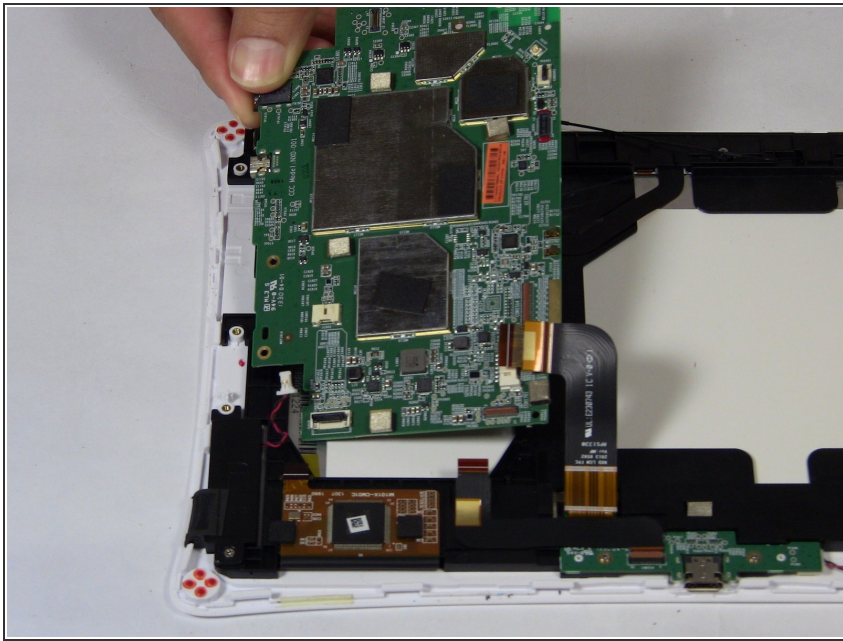

- Lift the motherboard up away from the Nabi XD.



## Step 12 — Speakers

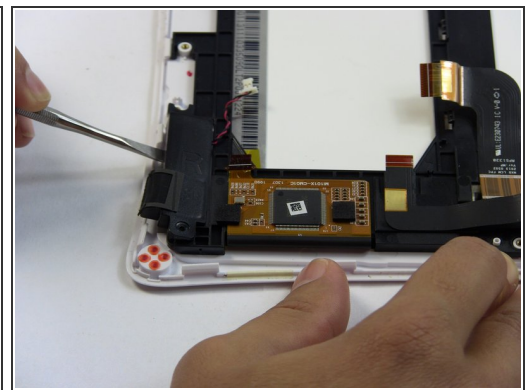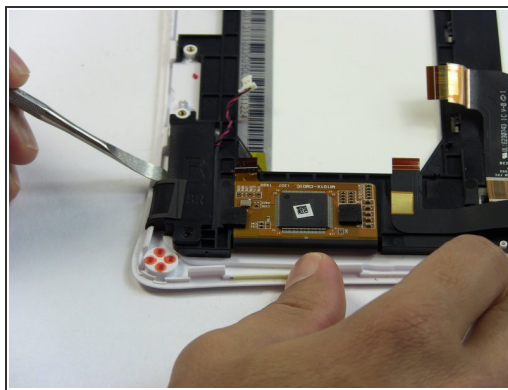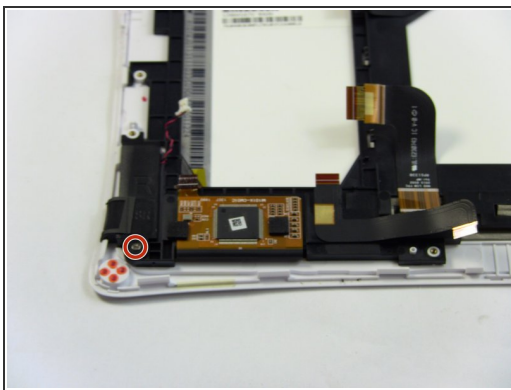

- Right (R) speaker removal:
  - Remove one 4mm Phillips screw.
- Use the metal spudger to separate the speaker from the frame.
- ⓘ The speaker is glued to the Nabi XD it will require some force to separate them.






## Step 13

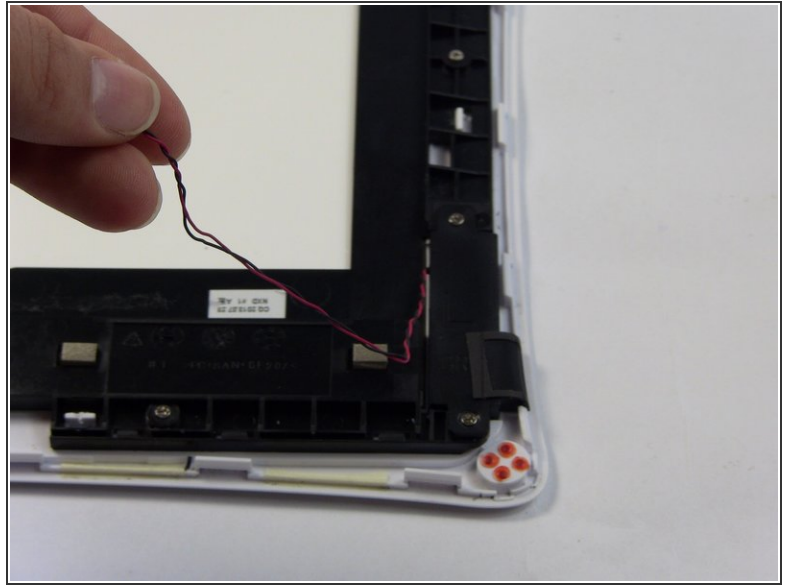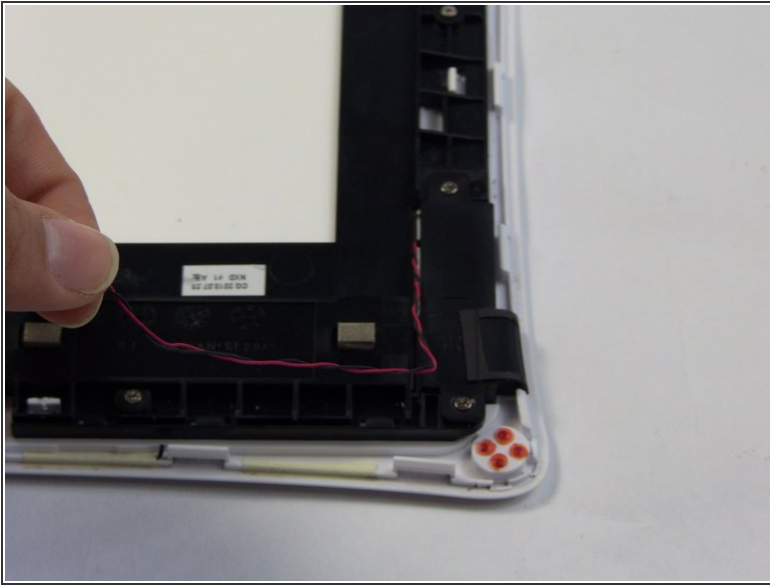


- Remove the left (L) speaker wire from the frame by pulling it to the side and up.
- ⓘ The wire in this step, is connected to the charging port. Removing it, is shown in detail on step 6.

## Step 14

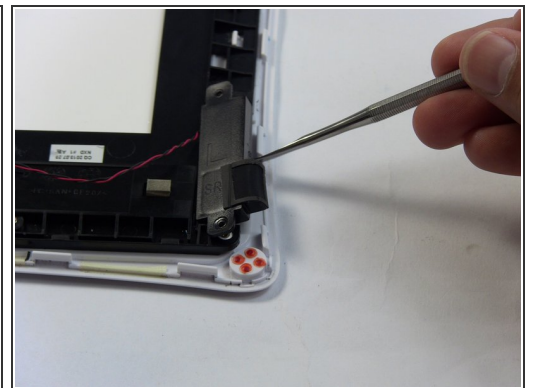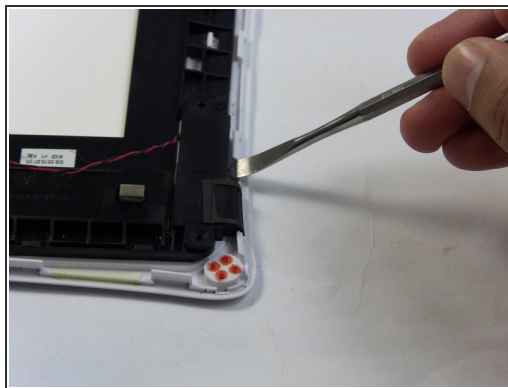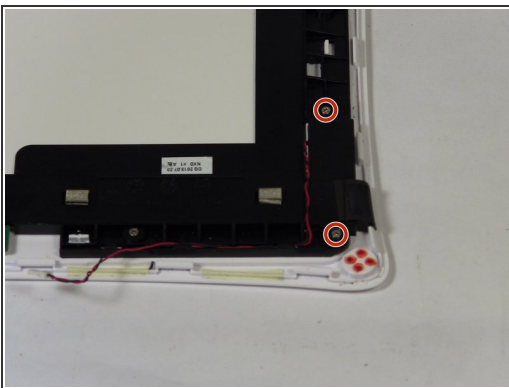


- Left (L) speaker removal:
  - Remove two 4mm Phillips screws.
- Use the metal spudger to separate the speaker from the frame.

## Step 15 — Screen

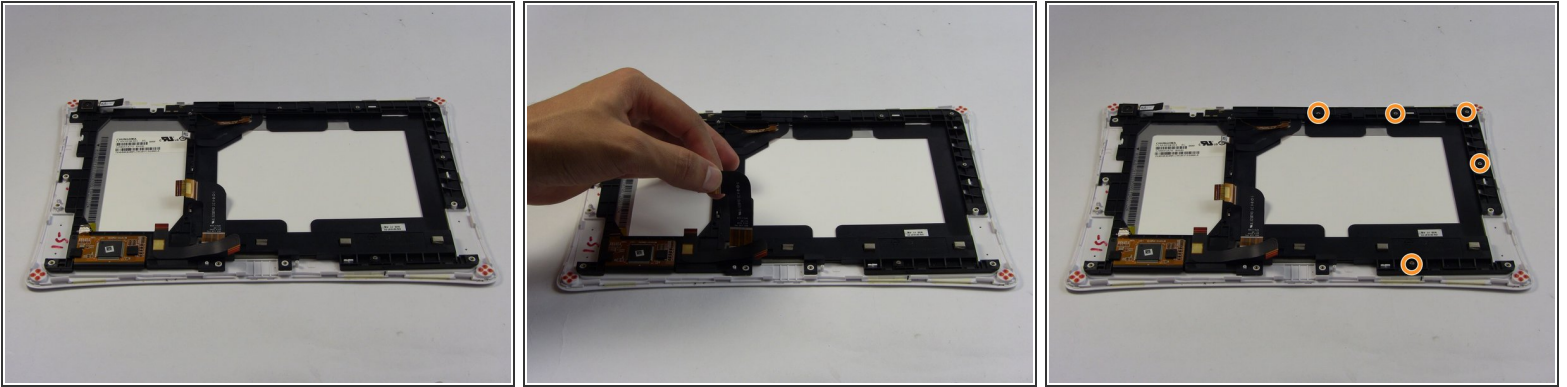

- The ribbons are glued to the frame so gently lift them up without ripping them.
- Lightly lift the marked wires and ribbons from the frame by gently pulling them in the direction of the arrows and up.
- Remove five 4mm Phillips screws from the frame.



## Step 16

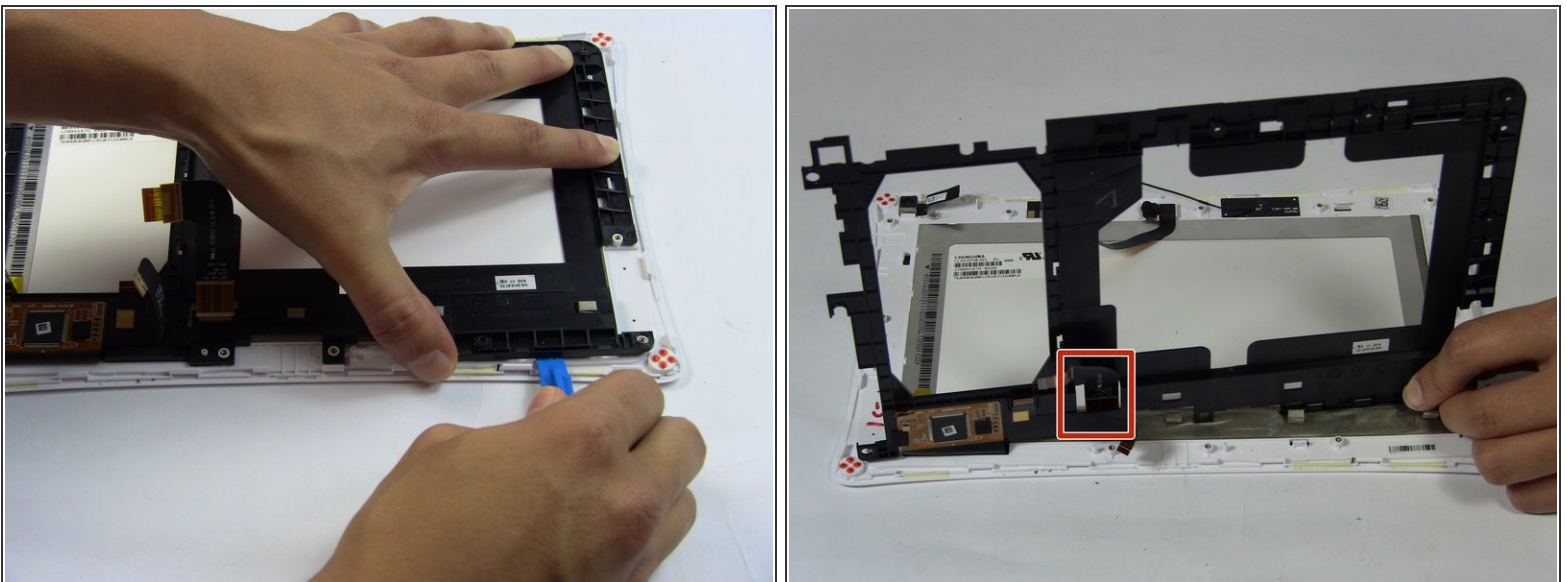

- Use the Plastic Opening tools to lift the frame up.
  - The ribbons need to be detangled from the frame while you are lifting it up.
- ⚠ Do not yank the frame away from the Nabi XD it is connect to it by a ribbon. Gently lift.



## Step 17

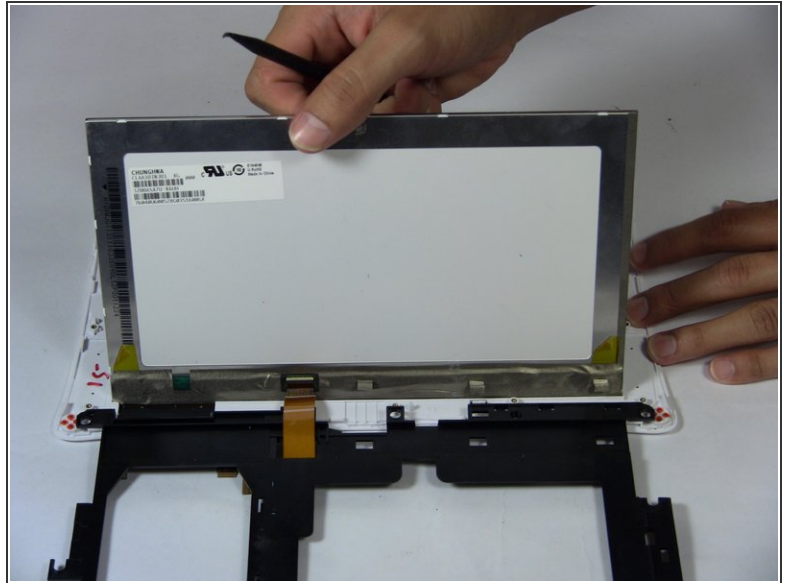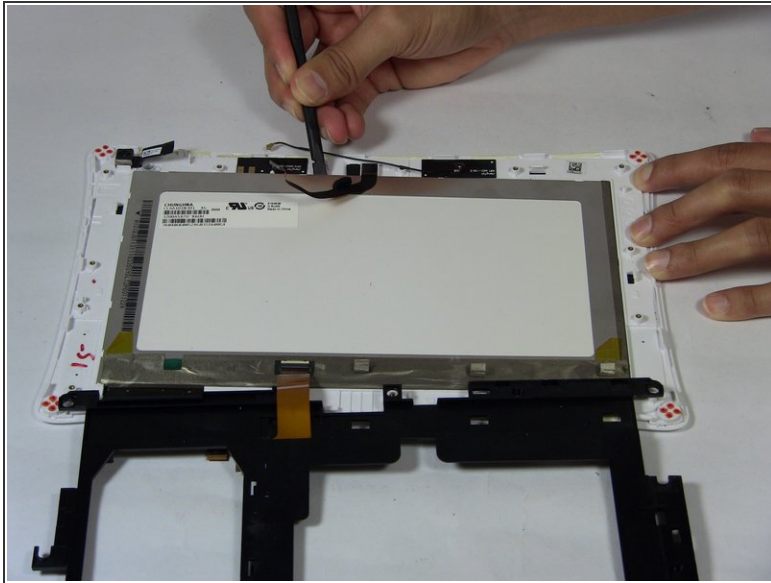

- Lift the screen up with the black spudger.
- Lift the frame up slowly and place it to the side.

To reassemble your device, follow these instructions in reverse order.