




Samsung Galaxy Tab 3 10.1 Battery Replacement

Use this guide to replace the battery in your...

Written By: Corey Brown

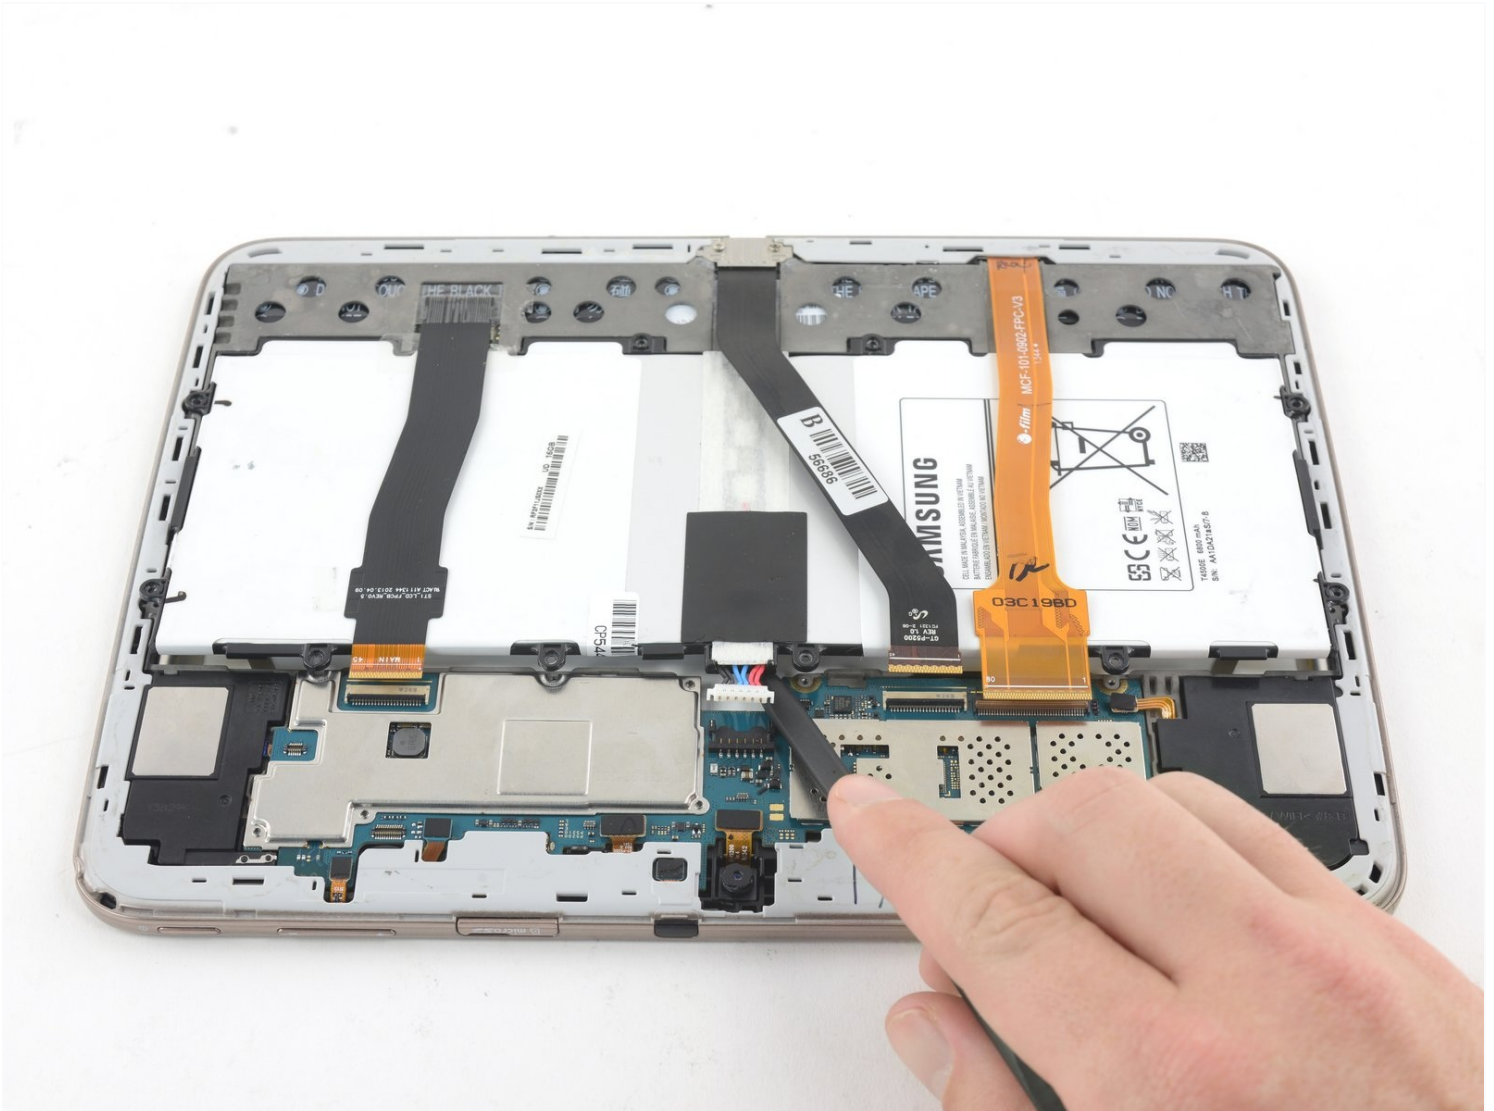

INTRODUCTION

Use this guide to replace the battery in your Samsung Galaxy Tab 3 10.1 tablet.

TOOLS:

[iFixit Opening Picks \(Set of 6\)](#) (1)
[Spudger](#) (1)
[Phillips #000 Screwdriver](#) (1)

PARTS:

[Galaxy Tab 3 10.1 Battery](#) (1)

Step 1 — Rear Case





- Insert an opening pick between the rear case and the plastic rim.
- ① You may need to add multiple picks to detach the clips.
- Slide the pick along the edge of the rear case until you release the plastic clips attaching the rear case to the display.
- Continue to slide the pick around the edge of the rear case until all clips are released.

Step 2





- Lift the case up to remove it.

Step 3 — Battery

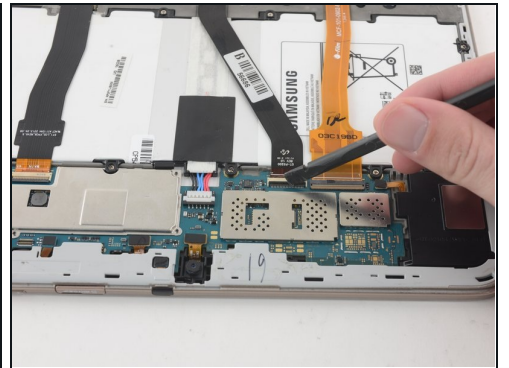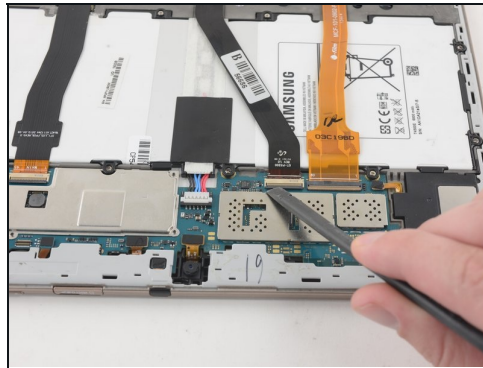



- Use the flat end of a nylon spudger to pry up the **black** plastic tabs securing the two ZIF connectors.

Step 4

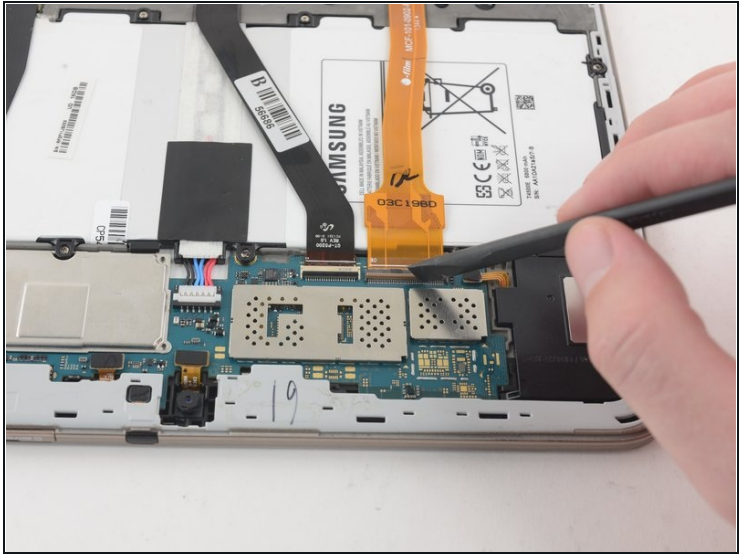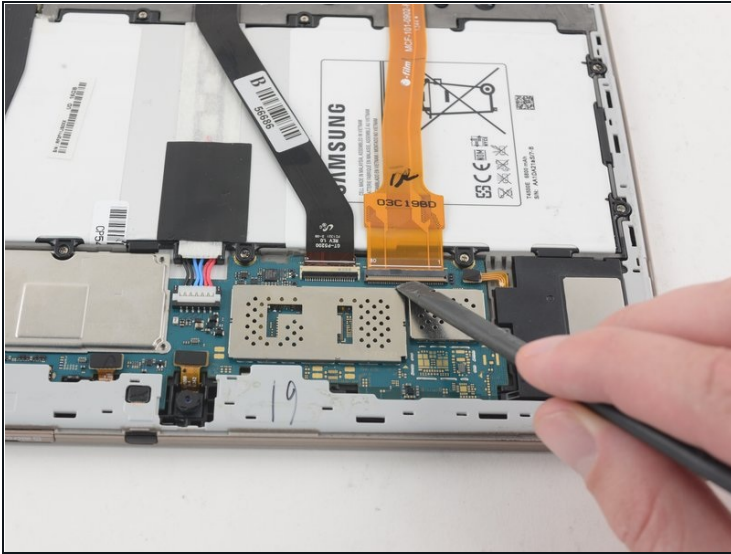


- Use the flat end of a nylon spudger to pry up the **brown** plastic tab securing the orange ribbon cable.

Step 5

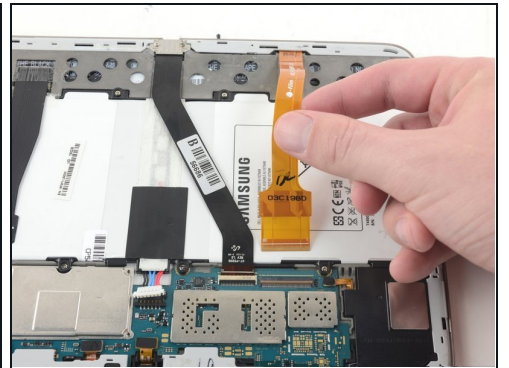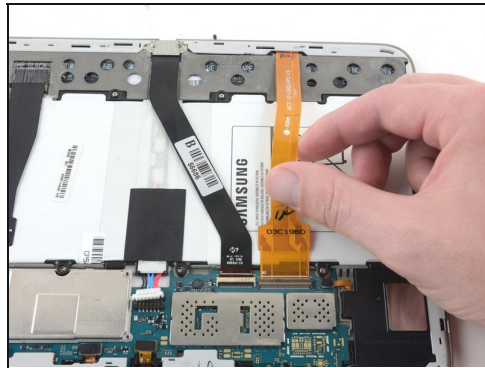



- Remove all three ribbon cables by gently pulling the cables away from the ZIF connectors.

Step 6

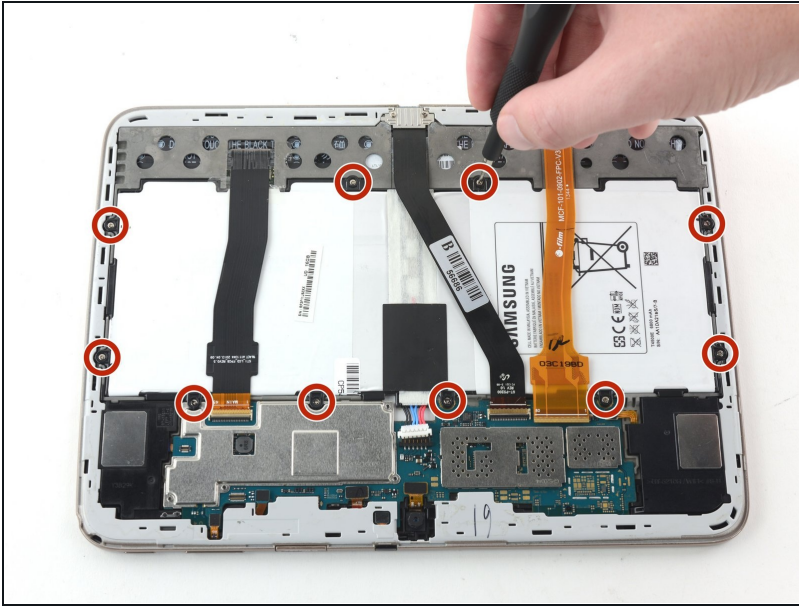



- Use a Phillips #000 screwdriver to remove the ten 3mm screws securing the battery to the chassis.

Step 7

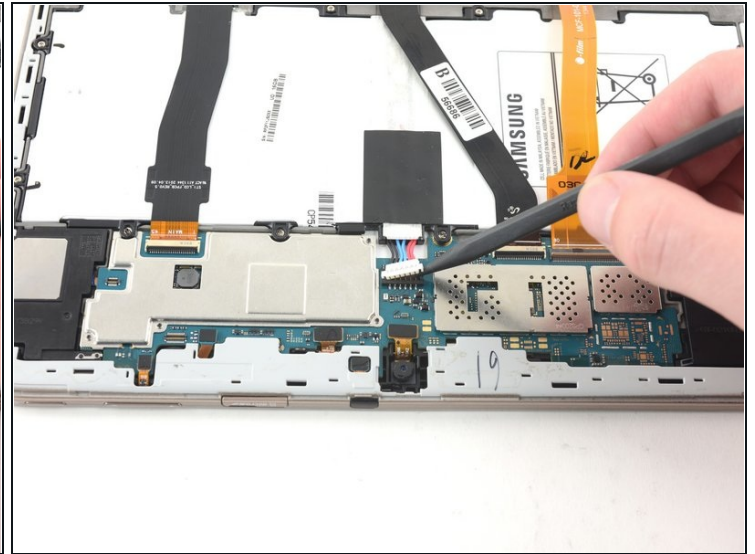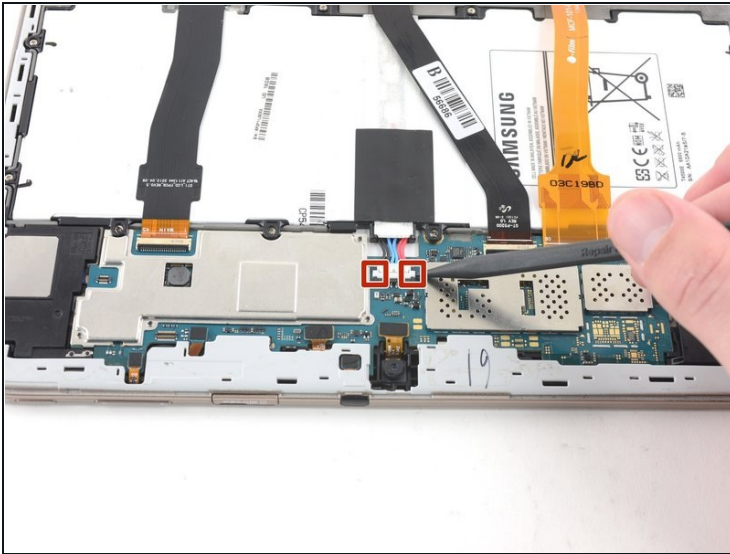

- Use the pointed end of a nylon spudger to pry the two battery connections away from the motherboard.

Step 8

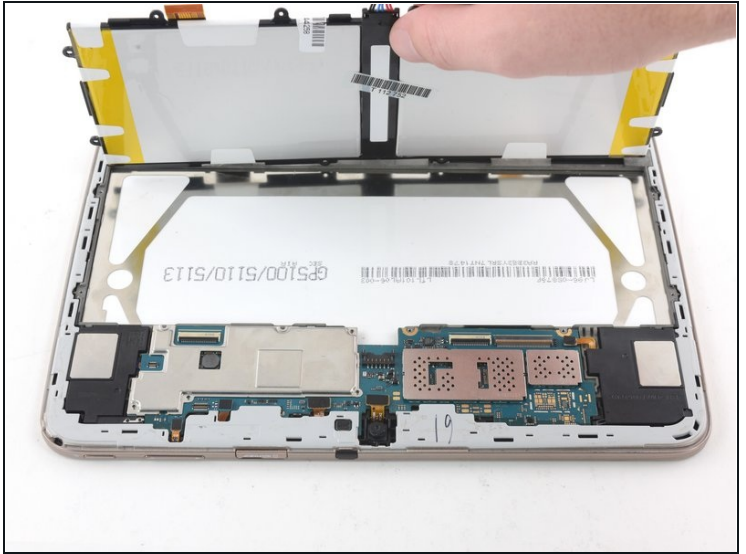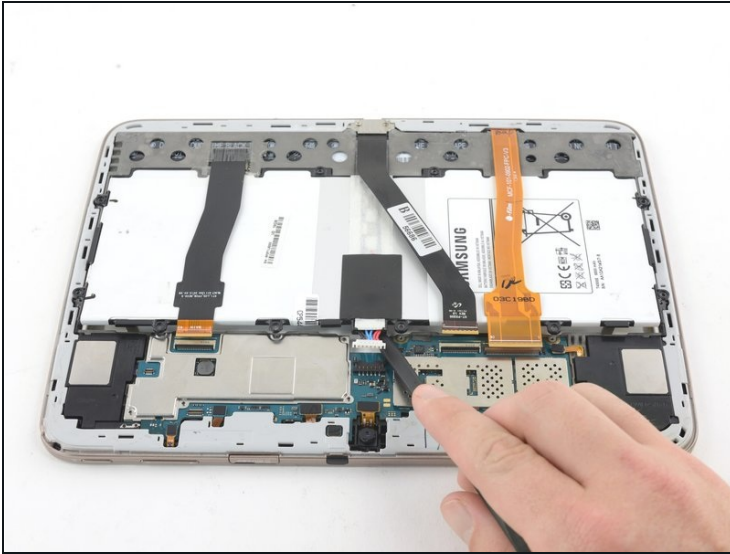

- Lift with a nylon spudger to remove the battery.

To reassemble your device, follow these instructions in reverse order.