



Written By: Adam Jansen



# INTRODUCTION


This guide will explain how to remove and replace the Loudspeaker for the Huawei P8 Lite.



## TOOLS:

- [64 Bit Driver Kit](#) (1)
  - [Spudger](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Loudspeaker

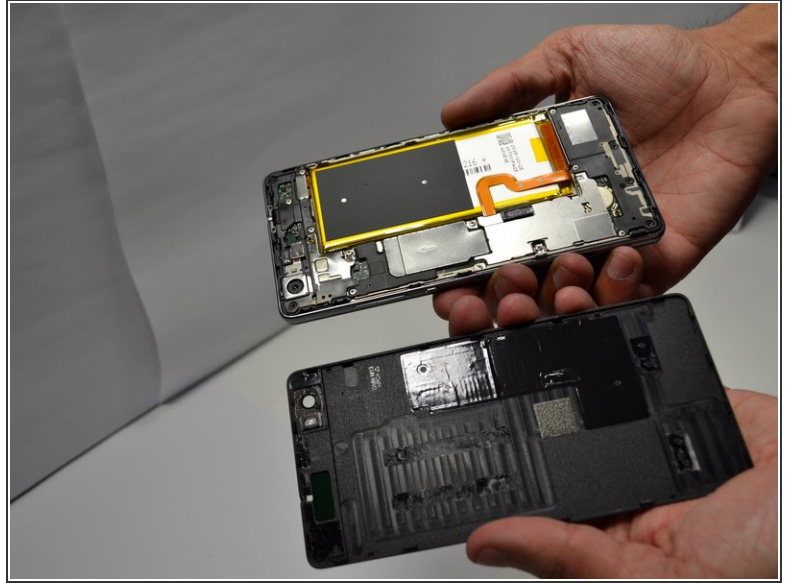



- Begin by removing the back cover of the device with the [Spudger](#). To prevent damage to the back cover, begin removing the cover half an inch to the right of the headphone jack and continue prying around the perimeter of the device.

## Step 2



- Locate the Loudspeaker at the bottom of the device.
- Remove the four black screws using the [T5 Torx Screwdriver](#).
- Then use the [Phillips #000 Screwdriver](#) to remove the three silver screws.

### Step 3

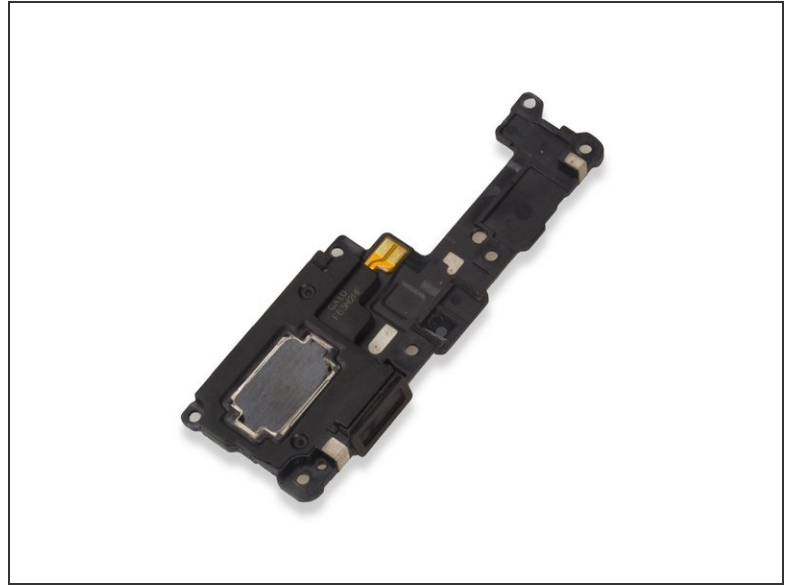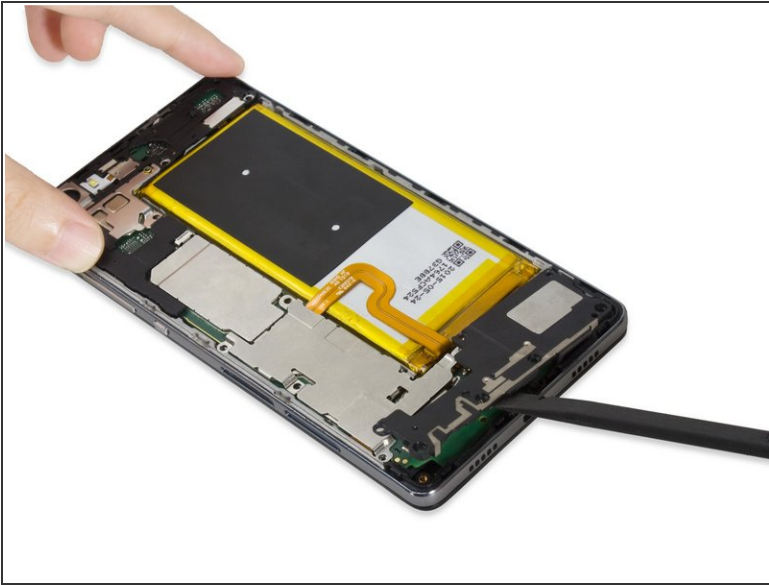

- Use the [Spudger](#) to gently remove the Loudspeaker from the device. Place the replacement Loudspeaker into the device.

To reassemble your device, follow these instructions in reverse order.