



Asus Vivobook Q302LA-BHI3T09 Battery Replacement

Replace your dying battery in your Asus Vivobook Q302LA-BHI3T09.

Written By: Aymane Elbernoussi



INTRODUCTION

The battery is the main source of power to the computer. Often times batteries will lose charge and need to be replaced. If the laptop won't turn on without the power cable, use this guide to replace the battery.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [JIS #0 Screwdriver](#) (1)
-

Step 1 — Battery



i Before doing a replacement, make sure the laptop is fully shut off.

- Using the JIS #0 Screwdriver, unscrew the ten 10 mm screws that hold the back casing in place.

Step 2



- Pry open the back casing using the opening tool along the side crevice.


⚠ Try to use the opening tool at multiple points. Lifting the back casing abruptly could damage the laptop.

Step 3



- Using the JIS #0 Screwdriver, remove the five 5.0 mm screws that hold down the battery.

Step 4

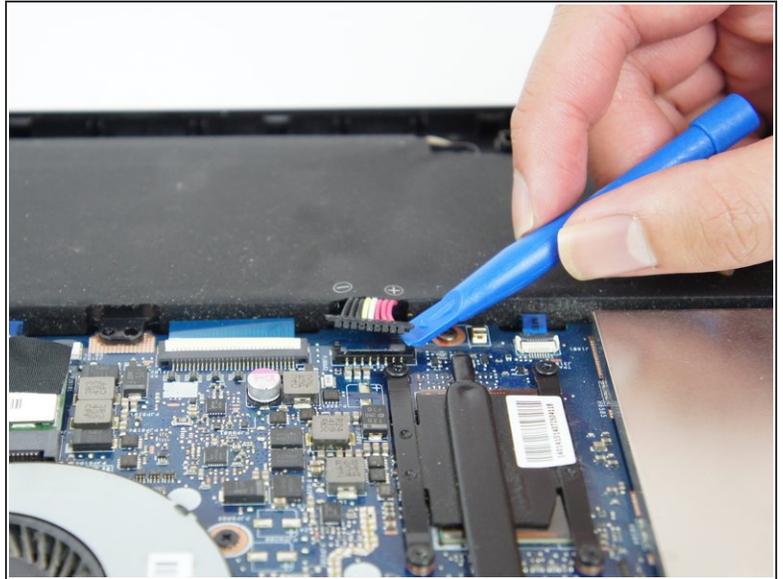

- Disconnect the cable connected to the motherboard.
- To remove, lift the ends using the opening tool.

To reassemble your device, follow these instructions in reverse order.